

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[IXYS Corporation](#)
[VBO88-08NO7](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


Standard Rectifier Module

1~ Rectifier	
V_{RRM}	= 800 V
I_{DAV}	= 90 A
I_{FSM}	= 1000 A


1~ Rectifier Bridge

Part number

VBO88-08NO7

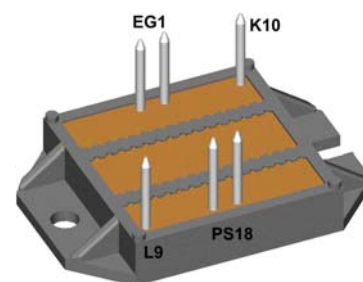

E72873



Features / Advantages:

- Package with DCB ceramic
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

Applications:

- Diode for main rectification
- For one phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Package: ECO-PAC2


- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Height: 9 mm
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V _{RSM}	max. non-repetitive reverse blocking voltage	T _{VJ} = 25°C				900	V
V _{RRM}	max. repetitive reverse blocking voltage	T _{VJ} = 25°C				800	V
I _R	reverse current	V _R = 800 V	T _{VJ} = 25°C			100	μA
		V _R = 800 V	T _{VJ} = 150°C			2	mA
V _F	forward voltage drop	I _F = 50 A	T _{VJ} = 25°C			1.13	V
		I _F = 100 A				1.31	V
		I _F = 50 A	T _{VJ} = 125 °C			1.05	V
		I _F = 100 A				1.28	V
I _{DAV}	bridge output current	T _C = 115°C rectangular d = 0.5	T _{VJ} = 150°C			90	A
V _{F0}	threshold voltage	} for power loss calculation only		T _{VJ} = 150°C		0.80	V
r _F	slope resistance					4.6	mΩ
R _{thJC}	thermal resistance junction to case					0.6	K/W
R _{thCH}	thermal resistance case to heatsink				0.3		K/W
P _{tot}	total power dissipation	T _C = 25°C				205	W
I _{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine	T _{VJ} = 45°C			1.00	kA
		t = 8,3 ms; (60 Hz), sine	V _R = 0 V			1.08	kA
		t = 10 ms; (50 Hz), sine	T _{VJ} = 150°C			850	A
		t = 8,3 ms; (60 Hz), sine	V _R = 0 V			920	A
I ² t	value for fusing	t = 10 ms; (50 Hz), sine	T _{VJ} = 45°C			5.00	kA²s
		t = 8,3 ms; (60 Hz), sine	V _R = 0 V			4.85	kA²s
		t = 10 ms; (50 Hz), sine	T _{VJ} = 150°C			3.62	kA²s
		t = 8,3 ms; (60 Hz), sine	V _R = 0 V			3.52	kA²s
C _J	junction capacitance	V _R = 400 V; f = 1 MHz		T _{VJ} = 25°C		35	pF



VBO88-08NO7

Package ECO-PAC2			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			100	A
T_{stg}	storage temperature		-40		125	°C
T_{VJ}	virtual junction temperature		-40		150	°C
Weight				24		g
M_D	mounting torque		1.5		2	Nm
$d_{Spp/App}$	creepage distance on surface striking distance through air	terminal to terminal	6.0			mm
$d_{Spb/Apb}$		terminal to backside	10.0			mm
V_{ISOL}	isolation voltage	t = 1 second	3000			V
		t = 1 minute	2500			V
		50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA				

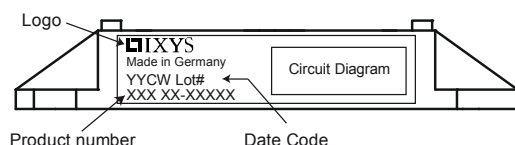

Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	VBO88-08NO7	VBO88-08NO7	Box	25	494372




Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 150^\circ\text{C}$

		Rectifier	
$V_{0\max}$	threshold voltage	0.8	V
$R_{0\max}$	slope resistance *	3.4	mΩ

Outlines ECO-PAC2

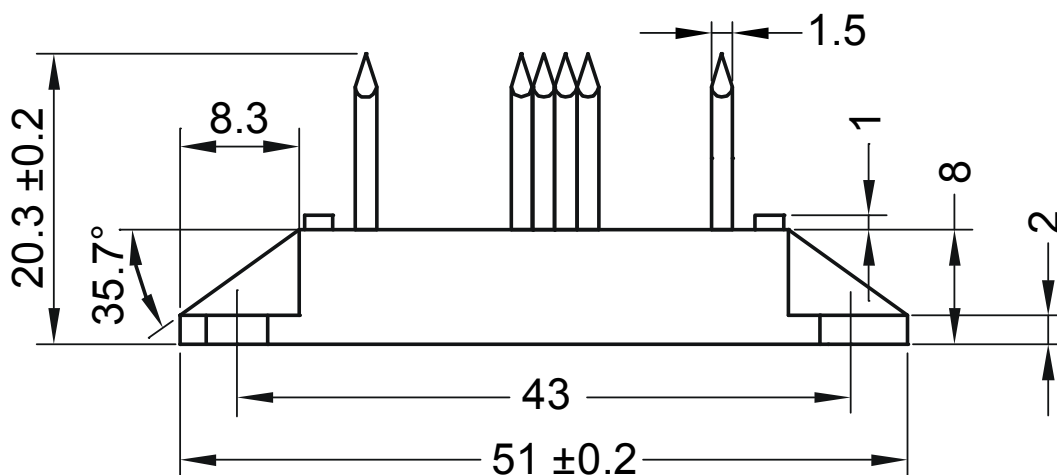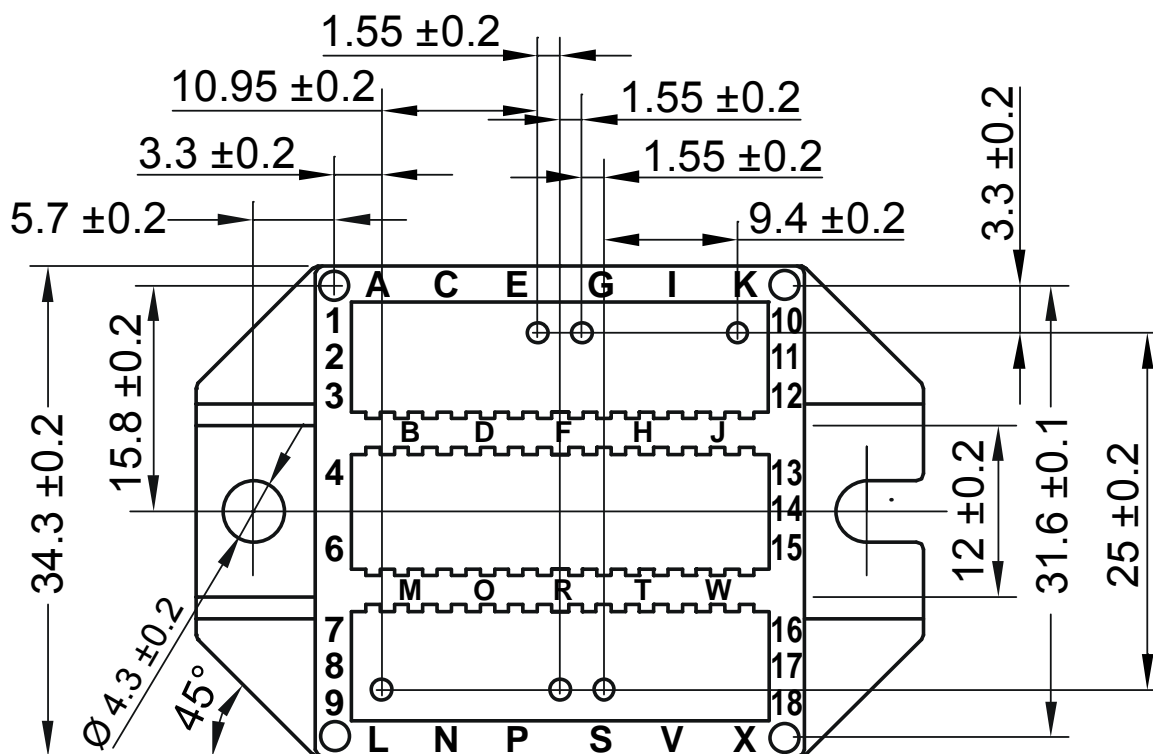

Rectifier

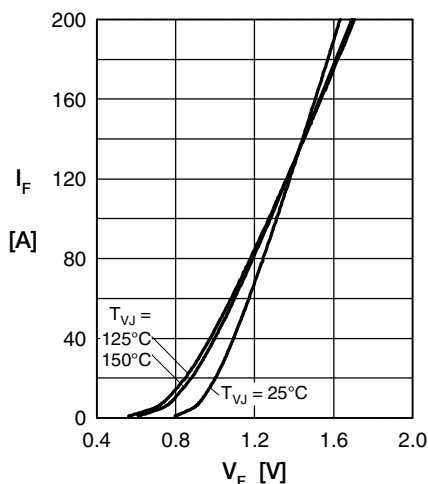


Fig. 1 Forward current vs. voltage drop per diode

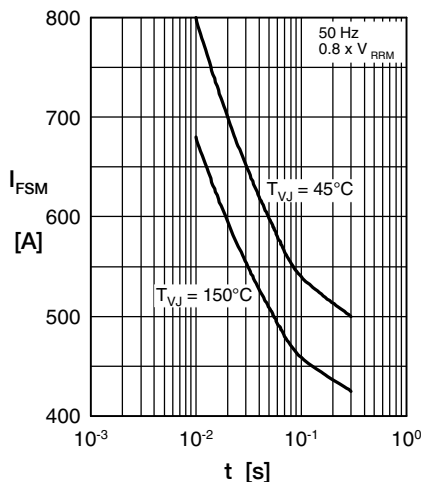


Fig. 2 Surge overload current vs. time per diode

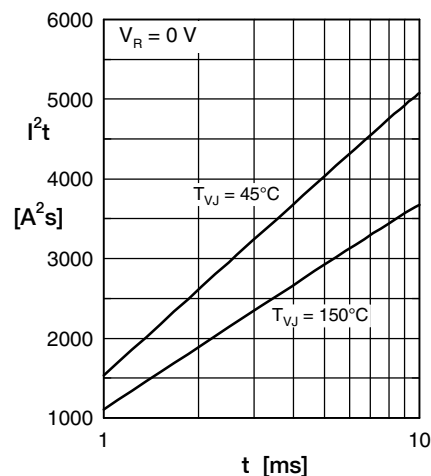


Fig. 3 I^2t vs. time per diode

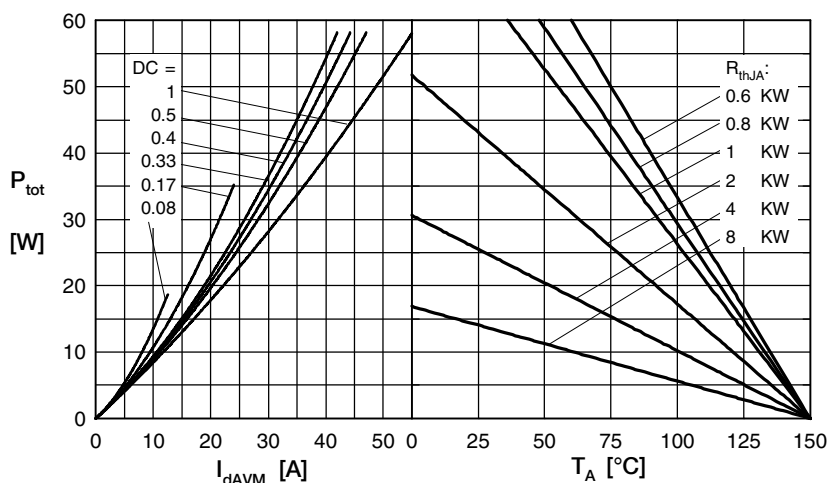


Fig. 4 Power dissipation vs. forward current and ambient temperature per diode

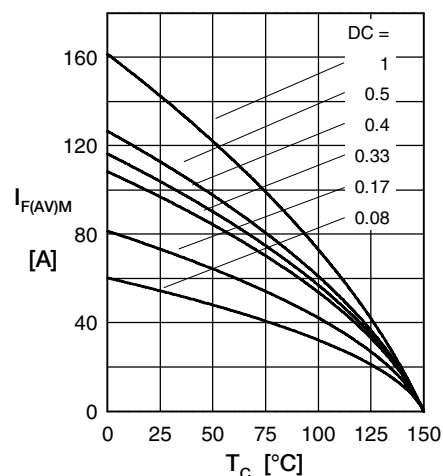


Fig. 5 Max. forward current vs. case temperature per diode

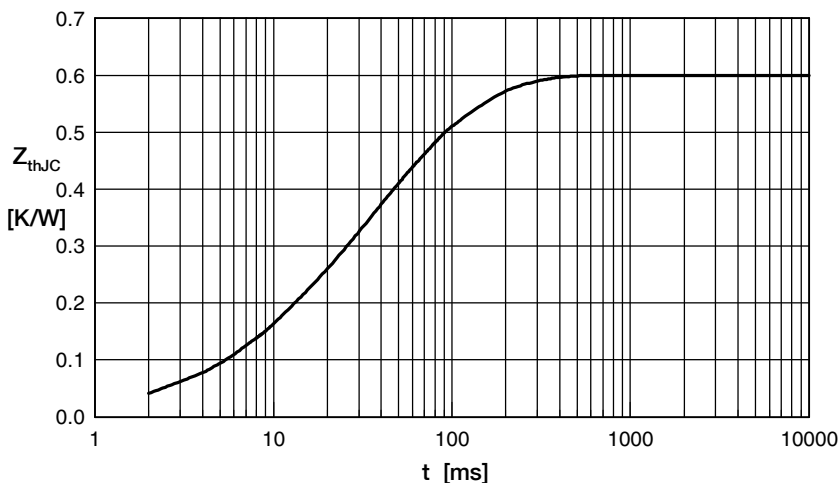


Fig. 6 Transient thermal impedance junction to case vs. time per diode

Constants for Z_{thJC} calculation:

i	R_{th} (K/W)	t_i (s)
1	0.08	0.012
2	0.04	0.007
3	0.29	0.036
4	0.19	0.102