

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[IXYS Corporation](#)
[VUE75-06NO7](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

ECO-PAC™ Three Phase Rectifier Bridge with Fast Recovery Epitaxial Diodes (FRED)

$I_{dAV} = 86 \text{ A}$
 $V_{RRM} = 600 \text{ V}$
 $t_{rr} = 35 \text{ ns}$

| V_{RSM} V | V_{RRM} V | Typ |
|----------------|----------------|--------------|
| 600 | 600 | VUE 75-06NO7 |



| Symbol | Conditions | Maximum Ratings | |
|-------------|---|--------------------------|----------------------|
| I_{dAV} ① | $T_C = 100^\circ\text{C}$, module | 86 | A |
| | | 90 | A |
| I_{FSM} | $T_{VJ} = 45^\circ\text{C}$ $V_R = 0$ | t = 10 ms (50 Hz), sine | 250 A |
| | | t = 8.3 ms (60 Hz), sine | 275 A |
| | $T_{VJ} = T_{VJM}$ $V_R = 0$ | t = 10 ms (50 Hz), sine | 215 A |
| | | t = 8.3 ms (60 Hz), sine | 235 A |
| I^2t | $T_{VJ} = 45^\circ\text{C}$ $V_R = 0$ | t = 10 ms (50 Hz), sine | 315 A ² s |
| | | t = 8.3 ms (60 Hz), sine | 320 A ² s |
| | $T_{VJ} = T_{VJM}$ $V_R = 0$ | t = 10 ms (50 Hz), sine | 230 A ² s |
| | | t = 8.3 ms (60 Hz), sine | 230 A ² s |
| T_{VJ} | | -40...+150 | °C |
| T_{VJM} | | 150 | °C |
| T_{stg} | | -40...+125 | °C |
| V_{ISOL} | 50/60 Hz, RMS $I_{ISOL} \leq 1 \text{ mA}$ | t = 1 min | 3000 V~ |
| | | t = 1 s | 3600 V~ |
| M_d | Mounting torque (M4) | 1.5-2/14-18 | Nm/lb.in. |
| Weight | typ. | 19 | g |

Features

- Package with DCB ceramic base plate in low profile
- Isolation voltage 3000 V~
- Planar passivated chips
- Low forward voltage drop
- Leads suitable for PC board soldering

Applications


- Supplies for DC power equipment
- Input and output rectifiers for high frequency
- Battery DC power supplies
- Field supply for DC motors

Advantages

- Space and weight savings
- Improved temperature and power cycling capability
- Small and light weight
- Low noise switching

| Symbol | Conditions | Characteristic Values | |
|------------|---|-----------------------|------------------|
| | | typ. | max. |
| I_R | $V_R = V_{RRM}$ $T_{VJ} = 25^\circ\text{C}$ | 0.25 | mA |
| | | 1.0 | mA |
| V_F | $I_F = 30 \text{ A}$ $T_{VJ} = 25^\circ\text{C}$ | 1.57 | V |
| V_{T0} | for power-loss calculations only | 0.98 | V |
| r_T | | 8 | mΩ |
| R_{thJC} | per diode; DC current | 0.9 | K/W |
| R_{thCH} | per diode, DC current, typ. | 0.3 | K/W |
| I_{RM} | $I_F = 50 \text{ A}$, $-di/dt = 100 \text{ A}/\mu\text{s}$ $V_R = 100 \text{ V}$, $L = 0.05 \text{ mH}$, $T_{VJ} = 100^\circ\text{C}$ | 6 | tbd A |
| t_{rr} | $I_F = 1 \text{ A}$; $-di/dt = 200 \text{ A}/\mu\text{s}$; $V_R = 30 \text{ V}$, $T_{VJ} = 25^\circ\text{C}$ | 35 | tbd ns |
| a | Max. allowable acceleration | 50 | m/s ² |
| d_s | creeping distance on surface | 11.2 | mm |
| d_A | creepage distance in air | 9.7 | mm |

Dimensions in mm (1 mm = 0.0394")

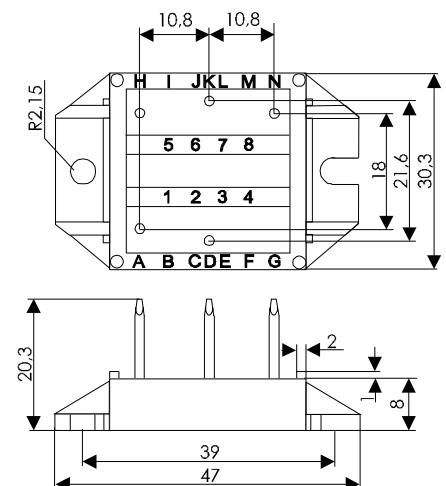

Data according to IEC 60747 refer to a single diode unless otherwise stated
 ① for resistive load at bridge output.

IXYS reserves the right to change limits, test conditions and dimensions.

IXYS **VUE 75-06NO7**

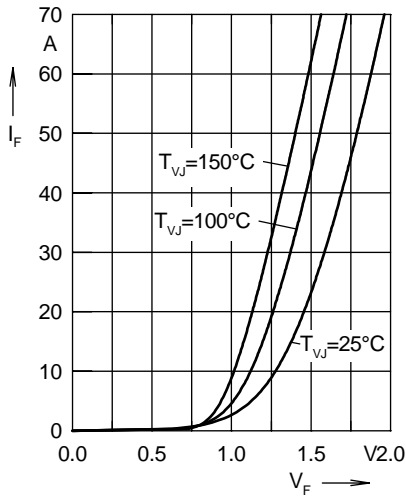


Fig. 1 Forward current I_F versus V_F

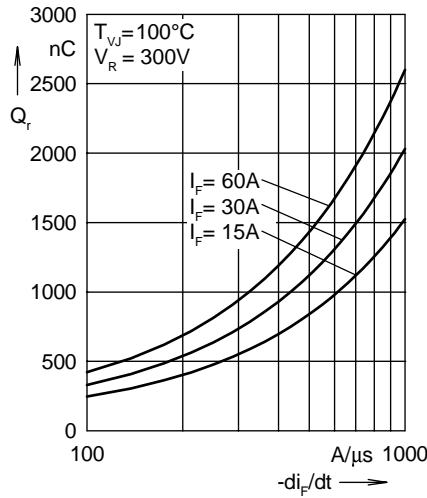


Fig. 2 Reverse recovery charge Q_r versus $-di_F/dt$

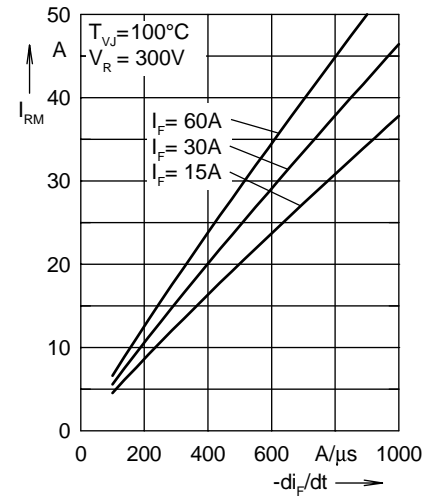


Fig. 3 Peak reverse current I_{RM} versus $-di_F/dt$

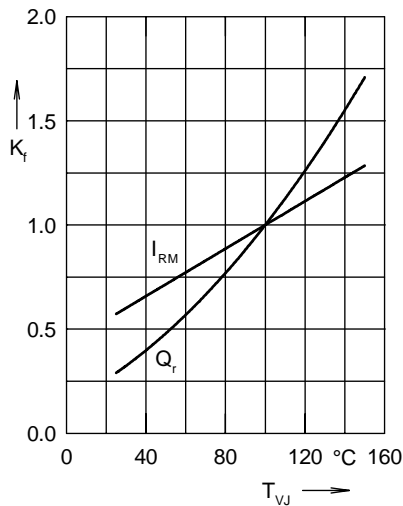


Fig. 4 Dynamic parameters Q_r , I_{RM} versus T_{VJ}

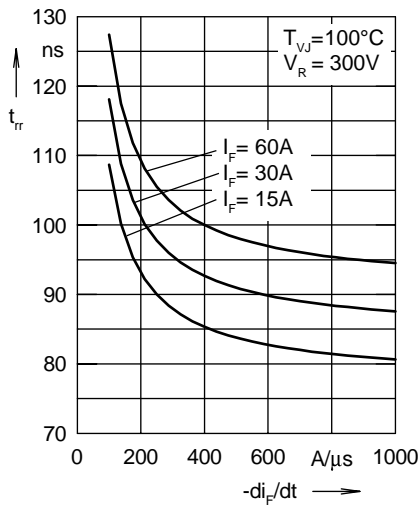


Fig. 5 Recovery time t_{rr} versus $-di_F/dt$

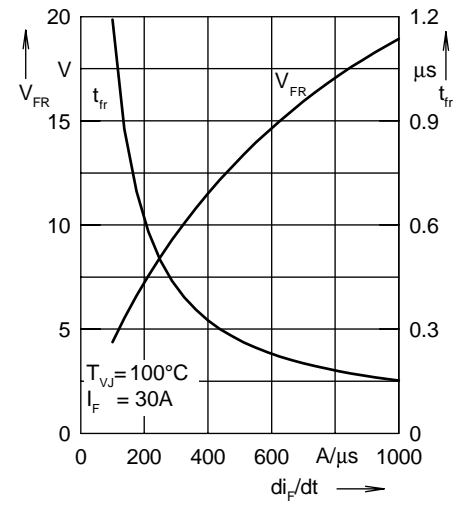


Fig. 6 Peak forward voltage V_{FR} and t_{fr} versus di_F/dt

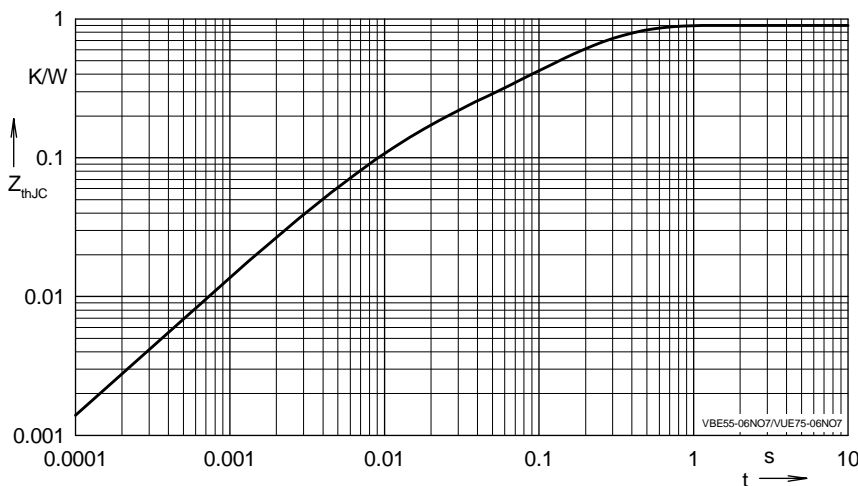


Fig. 7 Transient thermal resistance junction to case

Constants for Z_{thJC} calculation:

| i | R_{thi} (K/W) | t_i (s) |
|---|-----------------|-----------|
| 1 | 0.3012 | 0.0052 |
| 2 | 0.116 | 0.0003 |
| 3 | 0.0241 | 0.0004 |
| 4 | 0.4586 | 0.0092 |