

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[IXYS Corporation](#)  
[VUO122-16NO7](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


## Standard Rectifier Module

|                         |          |
|-------------------------|----------|
| <b>3~<br/>Rectifier</b> |          |
| $V_{RRM}$               | = 1600 V |
| $I_{DAV}$               | = 125 A  |
| $I_{FSM}$               | = 1000 A |


### 3~ Rectifier Bridge

Part number

**VUO122-16N07**

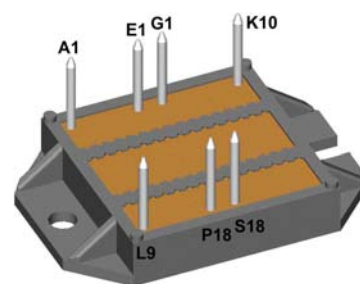

 E72873



#### Features / Advantages:

- Package with DCB ceramic
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

#### Applications:

- Diode for main rectification
- For three phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

#### Package: ECO-PAC2


- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Height: 9 mm
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

| Rectifier  |  |  |                              | Ratings |      |               |                   |
|------------|--|--|------------------------------|---------|------|---------------|-------------------|
| Symbol     | Definition                                   | Conditions   | min.                         | typ.    | max. | Unit          |                   |
| $V_{RSM}$  | max. non-repetitive reverse blocking voltage |  |                              |         | 1700 | V             |                   |
| $V_{RRM}$  | max. repetitive reverse blocking voltage     |  |                              |         | 1600 | V             |                   |
| $I_R$      | reverse current                              | $V_R = 1600\text{ V}$                              |                              |         | 100  | $\mu\text{A}$ |                   |
|            |  | $V_R = 1600\text{ V}$                              |                              |         | 2    | mA            |                   |
| $V_F$      | forward voltage drop                         | $I_F = 50\text{ A}$                                |                              |         | 1.13 | V             |                   |
|            |  | $I_F = 150\text{ A}$                               |                              |         | 1.47 | V             |                   |
|            |  | $I_F = 50\text{ A}$                                | $T_{VJ} = 125^\circ\text{C}$ |         |      | 1.05          | V                 |
|            |  | $I_F = 150\text{ A}$                               |                              |         |      | 1.49          | V                 |
| $I_{DAV}$  | bridge output current                        | $T_C = 115^\circ\text{C}$<br>rectangular $d = 1/3$ |                              |         | 125  | A             |                   |
| $V_{F0}$   | threshold voltage                            | } for power loss calculation only                  |                              |         | 0.80 | V             |                   |
| $r_F$      | slope resistance                             |  |                              |         | 4.6  | m $\Omega$    |                   |
| $R_{thJC}$ | thermal resistance junction to case          |  |                              |         | 0.6  | K/W           |                   |
| $R_{thCH}$ | thermal resistance case to heatsink          |  |                              | 0.3     |      | K/W           |                   |
| $P_{tot}$  | total power dissipation                      |  |                              |         | 205  | W             |                   |
| $I_{FSM}$  | max. forward surge current                   | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$   | $T_{VJ} = 45^\circ\text{C}$  |         |      | 1.00          | kA                |
|            |  | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$  | $V_R = 0\text{ V}$           |         |      | 1.08          | kA                |
|            |  | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$   | $T_{VJ} = 150^\circ\text{C}$ |         |      | 850           | A                 |
|            |  | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$  | $V_R = 0\text{ V}$           |         |      | 920           | A                 |
| $I^2t$     | value for fusing                             | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$   | $T_{VJ} = 45^\circ\text{C}$  |         |      | 5.00          | kA <sup>2</sup> s |
|            |  | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$  | $V_R = 0\text{ V}$           |         |      | 4.85          | kA <sup>2</sup> s |
|            |  | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$   | $T_{VJ} = 150^\circ\text{C}$ |         |      | 3.62          | kA <sup>2</sup> s |
|            |  | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$  | $V_R = 0\text{ V}$           |         |      | 3.52          | kA <sup>2</sup> s |
| $C_J$      | junction capacitance                         | $V_R = 400\text{ V}; f = 1\text{ MHz}$             | $T_{VJ} = 25^\circ\text{C}$  |         | 35   | pF            |                   |



**VUO122-16NO7**

| Package ECO-PAC2 |  |                      |                                     | Ratings |      |      |      |
|------------------|--|----------------------|-------------------------------------|---------|------|------|------|
| Symbol           | Definition   | Conditions           |                                     | min.    | typ. | max. | Unit |
| $I_{RMS}$        | RMS current  | per terminal         |                                     |         |      | 100  | A    |
| $T_{stg}$        | storage temperature  |                      |                                     | -40     |      | 125  | °C   |
| $T_{vj}$         | virtual junction temperature                                 |                      |                                     | -40     |      | 150  | °C   |
| <b>Weight</b>    |  |                      |                                     |         | 24   |      | g    |
| $M_D$            | mounting torque  |                      |                                     | 1.5     |      | 2    | Nm   |
| $d_{Spp/App}$    | creepage distance on surface   striking distance through air | terminal to terminal |                                     | 6.0     |      |      | mm   |
| $d_{Spb/Apb}$    |  | terminal to backside |                                     | 10.0    |      |      | mm   |
| $V_{ISOL}$       | isolation voltage  | t = 1 second         | 50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA | 3000    |      |      | V    |
|                  |  | t = 1 minute         |                                     | 2500    |      |      | V    |

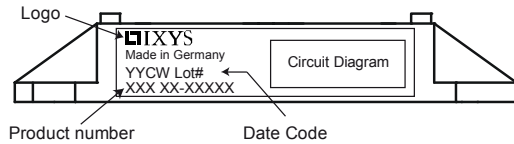


| Ordering | Part Number  | Marking on Product | Delivery Mode | Quantity | Code No. |
|----------|--------------|--------------------|---------------|----------|----------|
| Standard | VUO122-16NO7 | VUO122-16NO7       | Box           | 25       | 494453   |

**Equivalent Circuits for Simulation**

\* on die level




$T_{vj} = 150^\circ\text{C}$



**Rectifier**

|              |                    |     |    |
|--------------|--------------------|-----|----|
| $V_{0\ max}$ | threshold voltage  | 0.8 | V  |
| $R_{0\ max}$ | slope resistance * | 3.4 | mΩ |

Outlines ECO-PAC2

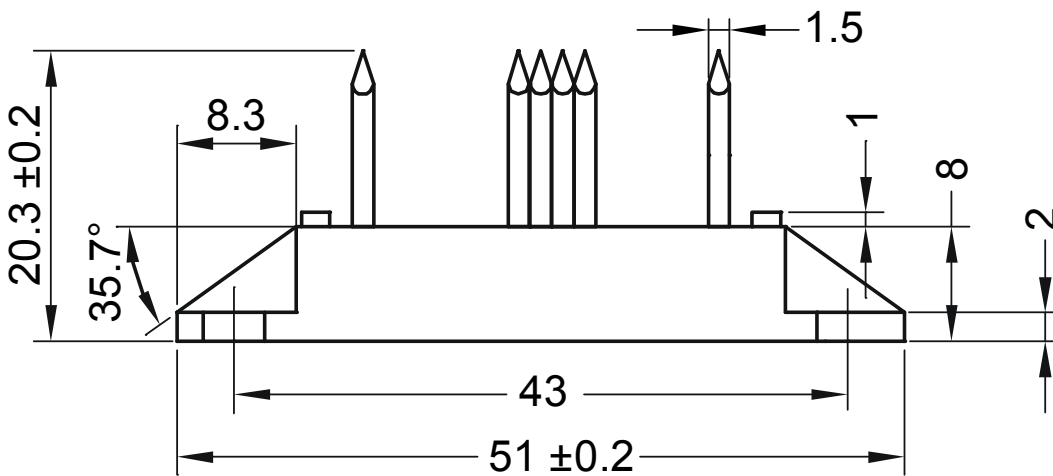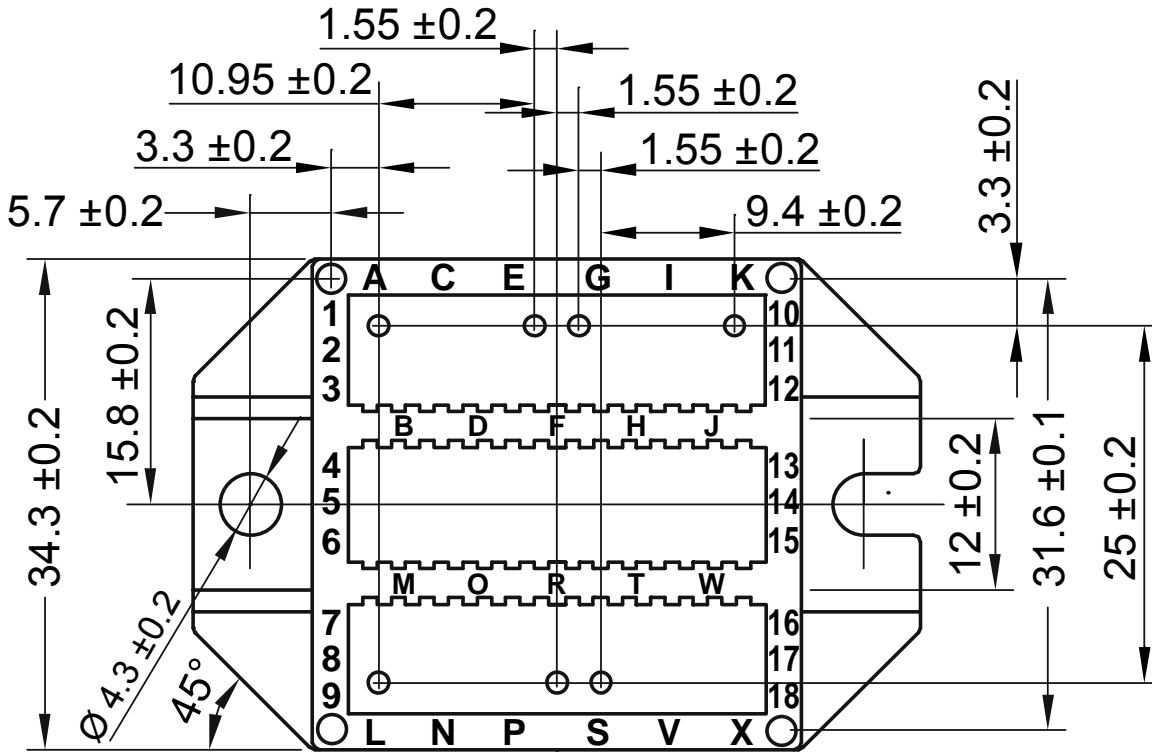

**Rectifier**

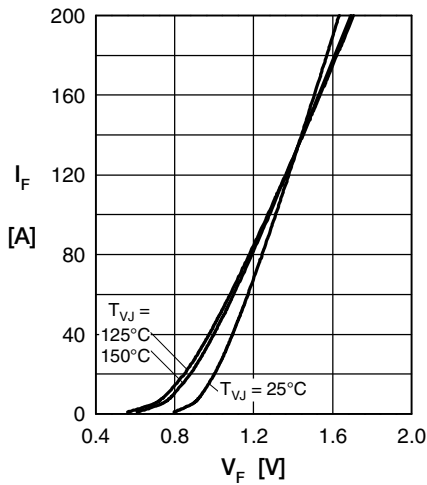


Fig. 1 Forward current vs. voltage drop per diode

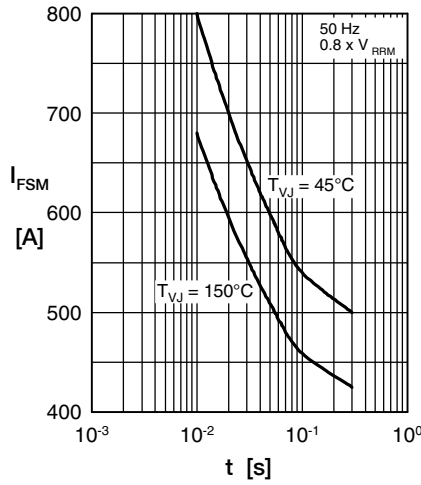


Fig. 2 Surge overload current vs. time per diode

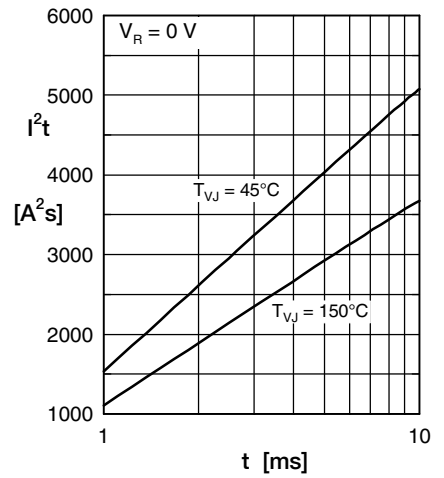


Fig. 3  $I^2t$  vs. time per diode

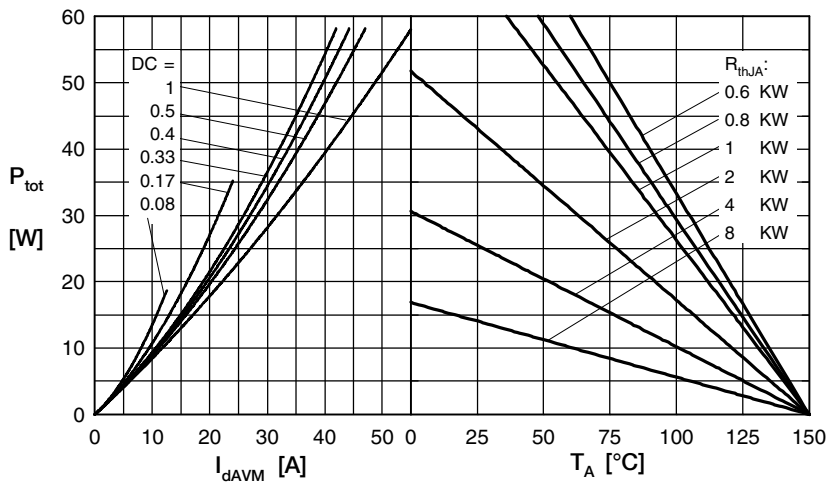


Fig. 4 Power dissipation vs. forward current and ambient temperature per diode

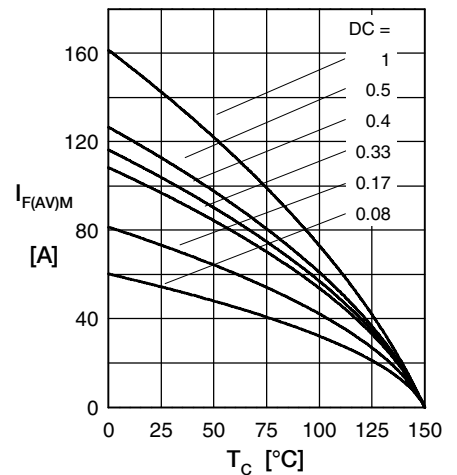


Fig. 5 Max. forward current vs. case temperature per diode

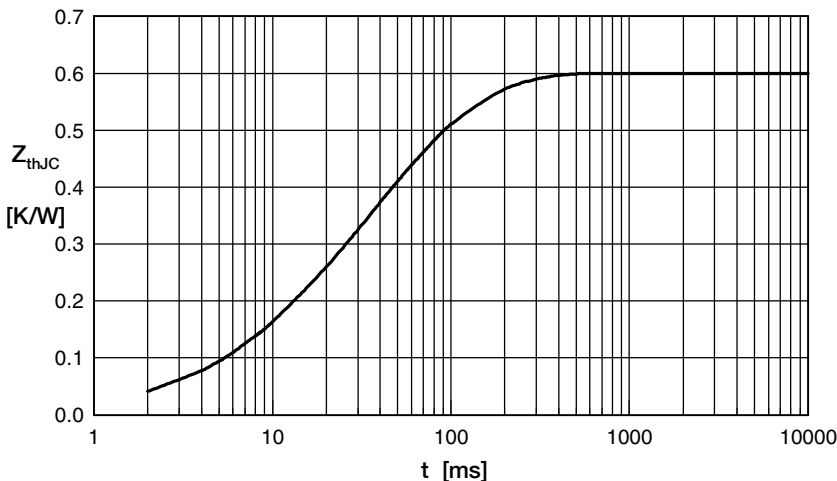


Fig. 6 Transient thermal impedance junction to case vs. time per diode

Constants for  $Z_{thJC}$  calculation:

| i | $R_{th}$ (K/W) | $t_i$ (s) |
|---|----------------|-----------|
| 1 | 0.08           | 0.012     |
| 2 | 0.04           | 0.007     |
| 3 | 0.29           | 0.036     |
| 4 | 0.19           | 0.102     |