

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Citizen Finedevice](#)

[CSX325P1P-UT](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PROGRAMMABLE OSCILLATORS (SMD • Ceramic Package)

CSX-325P SERIES


2000pcs/reel




FEATURES

- Wide range of output frequency by PLL technology.
- Quick sample delivery and short lead time in mass production.
- Automatic mounting and reflowable type.
- Low current consumption with output enable function (OE) or stand by function (STAND-BY).
- Suitable for various applications such as communication devices, AV devices, automotive devices and measuring instruments.

DIMENSION [mm]

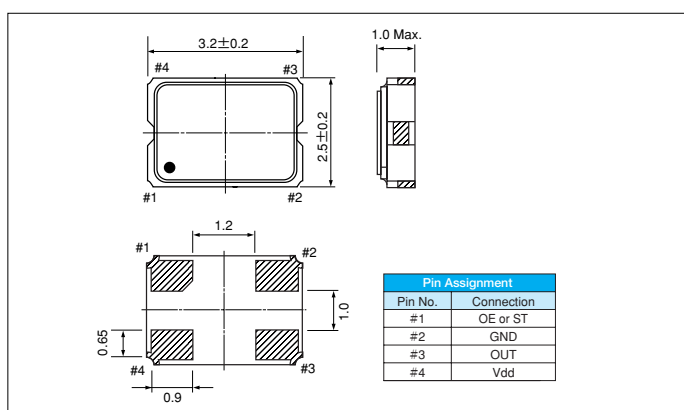

SOLDER PAD LAYOUT [mm]

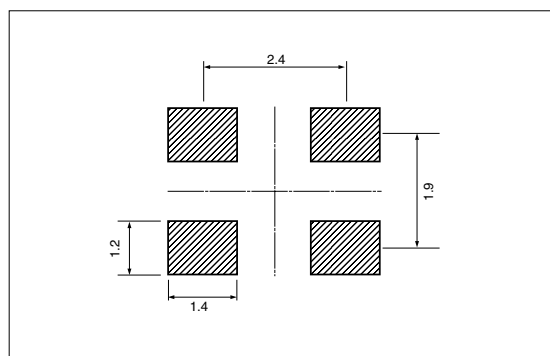

STANDARD SPECIFICATIONS

* Model is determined by the selection for the output enable function or stand by, the frequency stability and the supply voltage.

Item	Model	OE	CSX-325 PC (*)	CSX-325 PB (*)
		STAND-BY	CSX-325 PD (*)	CSX-325 PJ (*)
Frequency Range			1.000MHz ~ 125.000MHz	
Supply Voltage			Vdd : 5.0V±0.5V	Vdd : 3.3V±0.3V
Frequency Stability			B : ±50ppm, C : ±100ppm, E : ±50ppm(−40℃~+85℃), F : ±100ppm(−40℃~+85℃)	
Operating Temperature Range			−20℃~+70℃ (−40℃~+85℃)	
Storage Temperature Range			−55℃~+125℃	
Current consumption	(No load)		40mA Max.	25mA Max.
Duty	CMOS level (1/2 Vdd)		40~60%	
Output Voltage	V _{OH}		Vdd−0.4V Min.	
	V _{OL}		0.4V Max	
Output Load			CMOS 15pF Max.	
Rise and Fall Time	0.2Vdd⇔0.8Vdd		4 nsec Max.	
Start-up time			10 msec Max.	
Input Voltage	V _{IH}		2.0V Min.	0.7Vdd Min.
	V _{IL}		0.8V Max.	0.2Vdd Max.
Disable current			30mA Max.	15mA Max.
Stand-by current			50 μA Max.	
Aging (first year)			±2ppm / year Max.	