

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Newhaven Display Intl](#)
[C28-0704](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



User's Guide

C-28-0704

VFD

(Vacuum Fluorescent Character Display Module)

—————For product support, contact

New haven Display International
2511 Technology Drive #101
Elgin , IL 601 24
Tel: (847) 8 44-8795 Fax: (847) 8 44-8796

October 31, 2006



October 31, 2006

Vacuum Fluorescent Display Specification

PART NUMBER: C-28-0704

FEATURES: 8 Digits, Seven Segmented, with Icons – DVD, SVCD

APPLICATION: Character Display (7-Seg)

RATINGS: Below



Outer Dimensions	Panel Length	P.L.	112.0	mm	
	Panel Height	P.H.	25.0	mm	
	Panel Thickness	P.T.	6.8	mm	
Leads	Lead Pitch	L.P.	2.54	Mm	
	Lead Out	-	SIL		
Character Size	Character Height	C.H.	Multi	mm	
	Character Width	C.W.	Multi	mm	
Item	Symbol	Min.	Recommended	Max.	Unit
Filament Voltage	Ef	3.9	4.3	4.7	Vac
Peak Grid Voltage	Ec	-	25.0	28.0	Vp-p
Peak Anode Voltage	Eb	-	25.0	28.0	Vp-p
Cut-off Bias	Ek	-	-	-	-
Duty Cycle	Du	-	1/8	-	-
Pulse Width	Tp	-	100	-	uS
Operating Temperature	Topr	-20	-	+ 70	C
Storage Temperature	Tstg	-55	-	+ 85	C
Color of Illumination	Green / Red / Yellow				

C-28-0704

Electrical Characteristics

Item	Symbol	Test Condition	Min.	Typical	Max.	Unit
Filament Current	If -	Ef = 4.3 Vac eb = ec = 0	117.0 -	130.0 -	143.0 -	mAac -
Anode Current	ib/1G ib/2G ib/3,4G ib/5,6,7G -	Ef = 4.3 Vac eb = 25.0 Vp-p ec = 25.0 Vp-p Du = 1/8 tp = 100 uS	- - - - -	11.0 13.0 6.0 9.0 -	22.0 26.0 12.0 18.0 -	mA _{p-p} mA _{p-p} mA _{p-p} mA _{p-p} mA _{p-p}
Grid Current	ic/1G ic/2G ic/3,4G ic/5,6,7G -		- - - - -	11.0 13.0 8.0 11.0 -	22.0 26.0 16.0 22.0 -	mA _{p-p} mA _{p-p} mA _{p-p} mA _{p-p} mA _{p-p}
Luminance	L(G) L(R) L(Y)		350 (102) 35 (10) 60 (17)	700 (204) 70 (20) 120 (34)	- -	cd/m ² (fL) cd/m ² (fL) cd/m ² (fL)
Luminance Ratio	Lmin/Lmax		50	-	-	%
Grid Cut-off Voltage	Ecco	Ef = 4.3 Vac Eb = 25.0 Vdc	-4.5	-	-	Vdc
Anode Cut-off Voltage	Ebco	Ef = 4.3 Vac ec = 25.0 Vp-p Du = 1/8 tp = 100 uS	-4.5	-	-	Vdc

外形尺寸: (mm)

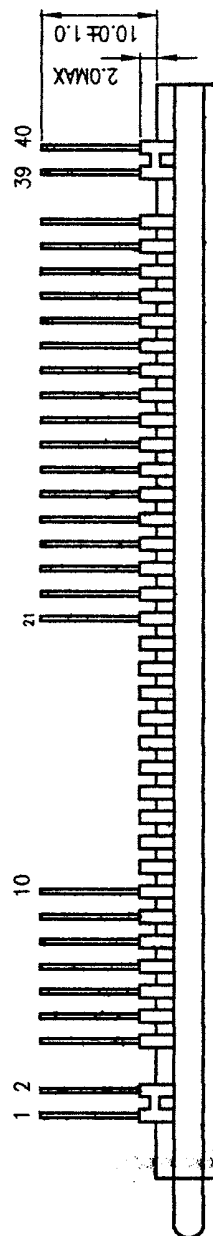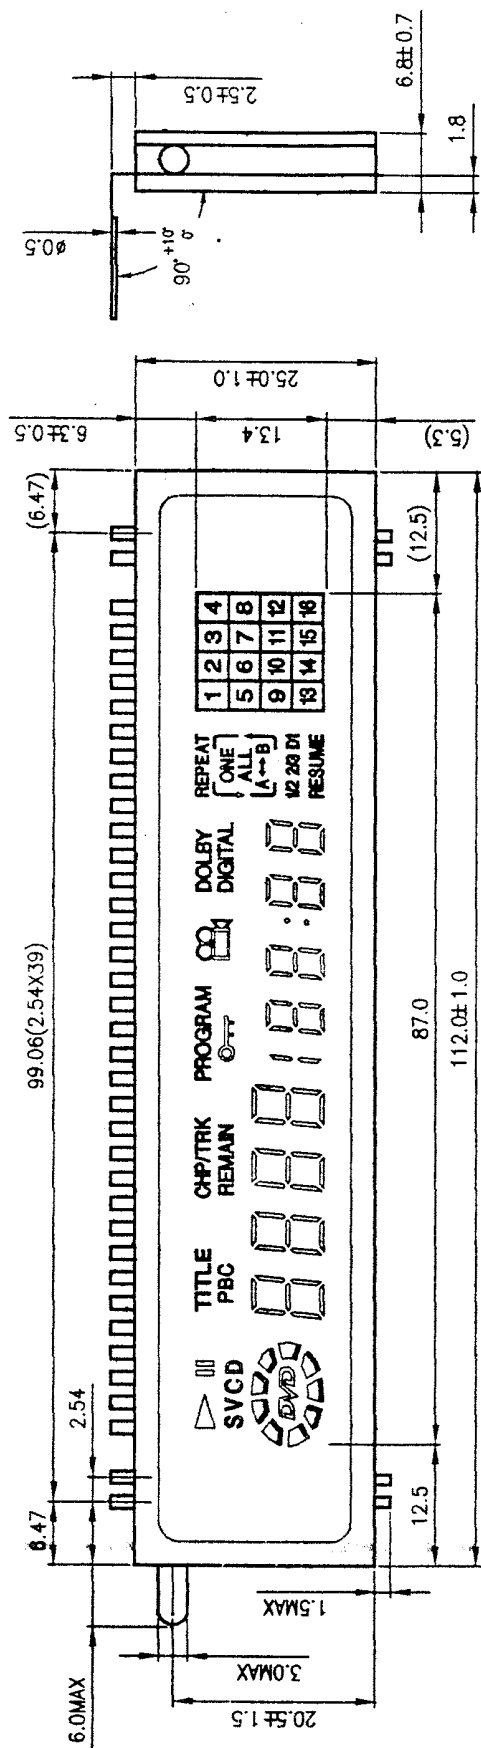

管脚连接


告牌序号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
电 报	F	F	Np	7G	6G	5G	4G	3G	2G	1G	Nc	Nc	Nc	Nc	Nc	Nc	Nc	Nc	Nc	Nc
告牌序号	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
电 报	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	Np	F	F

注: F: 灯丝 G: 栅极 P: 阳极 Nc: 无连脚 Np: 无引脚

F= Filament, G= Grid, P= Anode, NP= No Pin

C28-0704

栅极分割及显示面

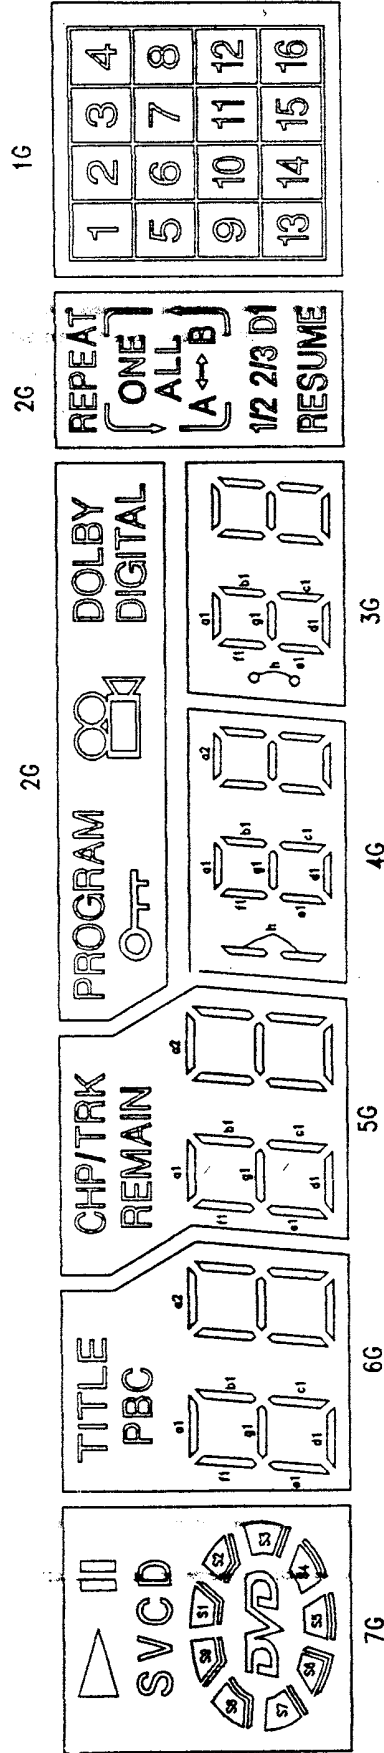

显示颜色: 红色 SVCD RESUME S1 S4 S7 为红色; 黄色 S3 S6 S9 为黄色; 其余为绿色

真值表

	7G	6G	5G	4G	3G	2G	1G
P1	—	—	—	—	—	—	
P2		a1	a1	a1	a1		1
P3		b1	b1	b1	b1	PROGRAM	2
P4	CD	TITLE	CHP/TRK	—	—		3
P5	V	c1	c1	c1	c1	DOLBY DIGITAL	4
P6	S	d1	d1	d1	d1	ALL	5
P7	DVD	e1	e1	e1	e1	REPEAT 	6
P8	S1	f1	f1	f1	f1	ONE	7
P9	S2	g1	g1	g1	g1	—	8
P10	S3	PBC	REMAIN	h	h	—	9
P11	S4	a2	a2	a2	a2	B	10
P12	S5	b2	b2	b2	b2	A ↔	11
P13	S6	c2	c2	c2	c2	—	12
P14	S7	d2	d2	d2	d2	1/2	13
P15	S8	e2	e2	e2	e2	2/3	14
P16	S9	f2	f2	f2	f2	D1	15
P17	—	g2	g2	g2	g2	RESUME	16