

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[KO130NA126](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

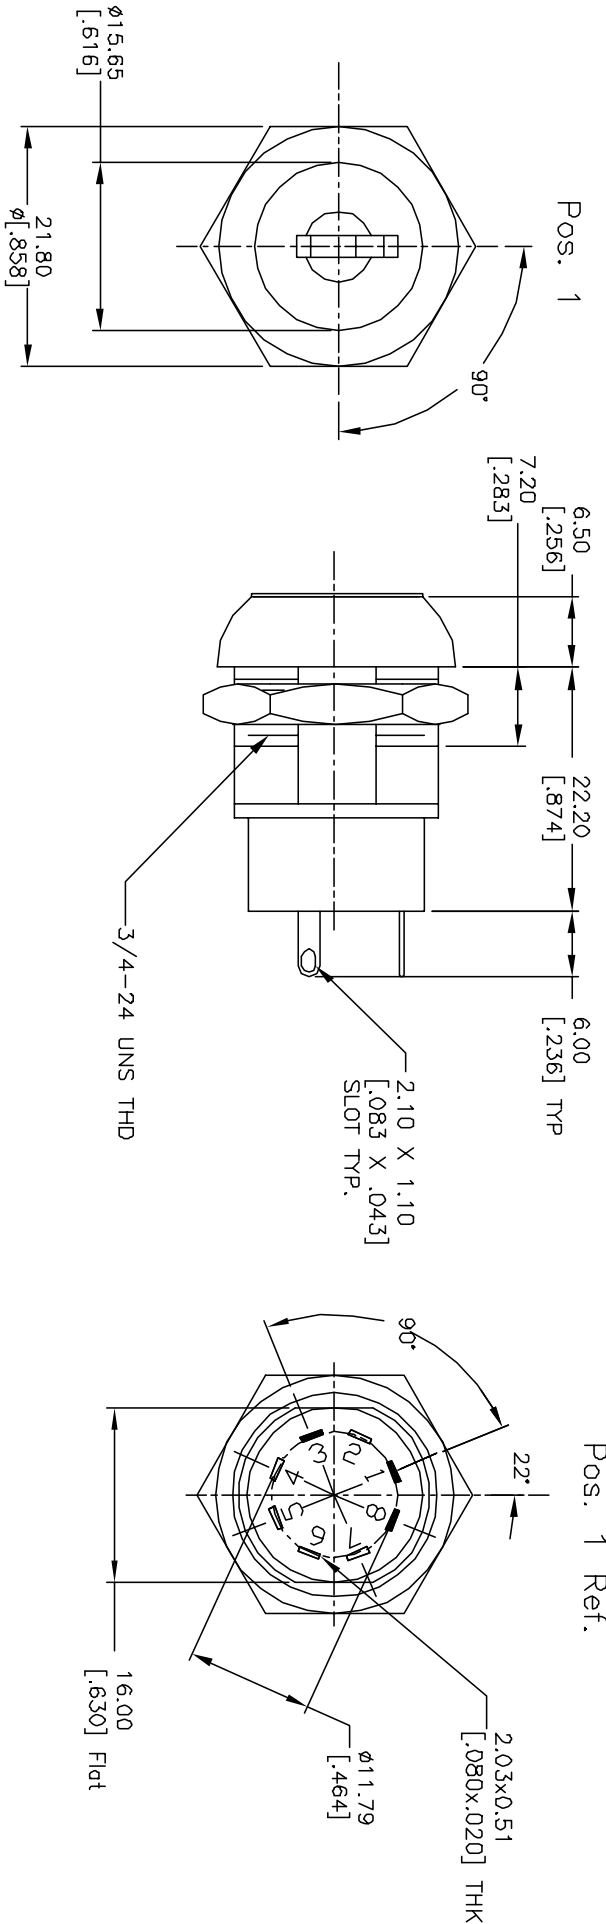

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X, X = \pm 0.4$
 $X, XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 4A @125VAC/28VDC, 2A @250VAC
5. DIELECTRIC STRENGTH: 1KV RMS min. at sea level
6. ELECTRICAL LIFE: 10,000 make-and-break cycles
at full load.
7. MATERIALS:
CONTACTS: Silver Plated Cu (Q Contact material)
TERMINALS: GOLD Plated Cu (Q Contact material)
MOUNTING NUT: Nickel Plated zinc alloy
CONTACT SPRING: Piano Wire
KEYS: Brass with code no. A126
LOOK: Bright Ni plated zinc alloy with NI facing
TUMBLER Mechanism: 4-disc tumbler cylinder.

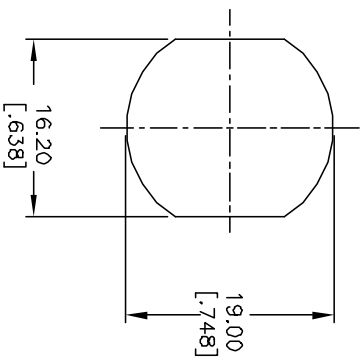

RECOMMENDED PANEL LAYOUT

CIRCUIT: SP (90° INDEXING)	
CONTACT CONFIGURATION	
SWITCH FUNCTION	
CONNECTED	TERMINAL #
POS. 1	POS. 2
8-1	1-3

LEGEND

- = Detent Positions (45° or 90°)
- ⊙ = Key pull possible in these positions

TUMBLER Mechanism: 4-disc tumbler cylinder.			
B	11557	REVISED SCHEMATIC	7/5/01 CJB
REV.	ECN No.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
TITLE		E-SWITCH®	
K0130N-A126			
SCALE	DATE	DR	DWG
1.5:1	3/21/01	CJB	K200223
			REV B