

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Schurter](#)
[0041.0401](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


DATA SWITCHES – MOMENTARY (SDK) ACTION



		SDK	
Electrical data			
Switching voltage max.	[V]	50 DC / 125 AC	
Switching current max.		silver 2 A AC / 1.2 A DC gold 80 mA / AC DC	
Lifetime (at rated breaking capacity)		> 10 ⁵	
Initial contact resistance, new	[mΩ]	silver <10 / gold <20	
Initial contact resistance, after lifetime	[mΩ]		
Insulation resistance	[Ω]	> 10 ⁹	
Contact bounce time	[ms]		
Mechanical data			
Actuating force	IP 40 [N]	3 – 5	
Contact travel	NO [mm]	2.4 ± 0.3	
End contact travel	[mm]	3.3 ± 0.4	
End stop strength	[N]	> 100	
Lifetime	[operations]	> 2 x 10 ⁵	
Other data			
Degree of protection		IP 40	
Soldering method		Wave soldering	
Soldering heat resistance	[°C/s]	248,5/1	
Ambient temperature	[°C]	-40 – +85	
Storage temperature	[°C]	-40 – +85	
Cleaning agent proof			
Materials			
Socket, cover, contact unit, carrier ring		Thermoplast PC	
Button non-illuminated		Thermoplast PC	
Button illuminated			
Sealing ring			
Terminals			
Contacts	CuBe2 HM, 5 μm Ag	gold (2 μ Au on hard silver)	



DIMENSIONS SWITCHES-MOMENTARY (SDK) ACTION

CONSTRUCTION




SDK

DIMENSIONS

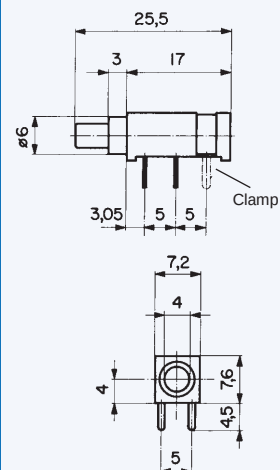

CIRCUIT DIAGRAM



SDK SWITCHES—MOMENTARY ACTION—NON-ILLUMINATED





SDK

SDK

FEATURES

Illumination			non-illuminated	non-illuminated
Degree of protection			IP 40	IP 40
Contact material			Ag	Au

PART NUMBER *

Switching functions				
NC/NO			0041.040 x	0041.041 x
Terminal types				
Colour of small button				
red			2	2
green				
black			1	1
Addition				
Clamp for SDK			0701.0049	0701.0049
Terminal types:			SDK Clamp 	SDK Clamp 

* X in the Part No. must be replaced by the desired version