

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Schurter](#)
[7170.0470](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Clip, 10.3 x 38 mm, UR



20A (UL)



Description

- Through hole mounting

Standards

- UL 4248-1 / UL 512

Approvals

- UL File Number: E41738

Applications

- Combiner Boxes in Photovoltaic Systems

References

Fuseholder to ASO 10.3x38

Weblinks

pdf-datasheet, html-datasheet, General Product Information, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, REACH, SCHURTER-Stock-Check, Distributor-Stock-Check, Detailed request for product


Technical Data

Fuse-Link	10.3 x 38 mm
Mounting	PCB
Terminal	Solder THT
Rated current	20A (UL)
Degree of Protection	IP 00
Material: Terminals	see variants
Unit Weight	4.1 g
Storage Conditions	0°C to 60°C, max. 70% r.h.
Product Marking	☐, Type, Approvals

Soldering Methods	Wave Soldering Profile
Solderability	235°C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260°C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A
Contact Resistance	< mΩ at 20 mV

Dimension

12 mm

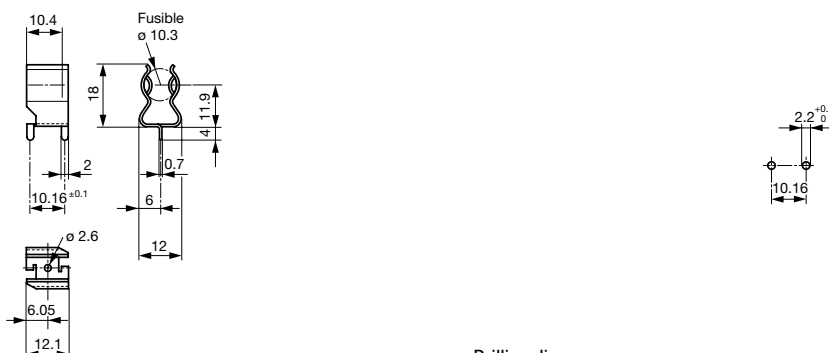

Drilling diagram

All Variants

Clip	Terminal	Material: Terminals	Order Number
●	straight	Tin-Plated Bronze	7170.0470

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit

Bulk (50 pcs.)