

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[PUI Audio, Inc.](#)
[AI-4228-P-FP250-R](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SPECIFICATIONS




PARAMETERS	VALUES	UNITS
RATED VOLTAGE	220	Vac
OPERATING VOLTAGE RANGE	60 ~ 250	Vac/Vdc
RATED CURRENT (MAX)	18	mA
MINIMUM SPL @ 10 CM	94	dBA
RESONANT FREQUENCY	2,800 ± 500	Hz
TONE OR PULSE RATE	FAST PULSE	3 pulse/sec
OPERATING TEMPERATURE	-30 ~ +85	°C
STORAGE TEMPERATURE	-40 ~ +85	°C
HOUSING MATERIAL	NYLON	-
TERMINAL MATERIAL	Sn PLATED BRONZE	-
WEIGHT	60	grams

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO
 PROJECTS UNLIMITED, INC. ANY USE OR
 REPRODUCTION, IN ANY FORM, WITHOUT PRIOR
 WRITTEN PERMISSION OF PROJECTS UNLIMITED,
 INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	6/21/2006	
A	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	2/27/2008	B.R.

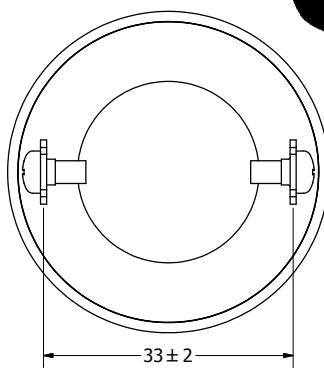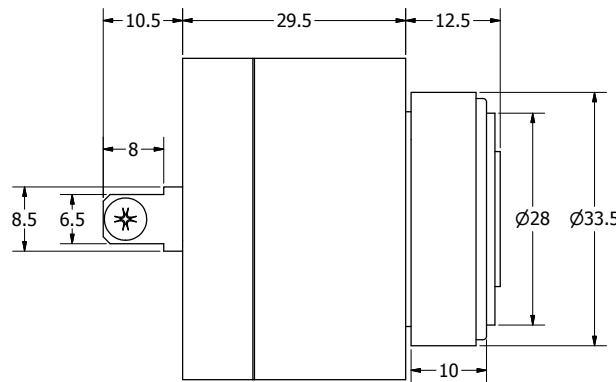

NOTES:


1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.



THIS PART IS
UL RECOGNIZED
IN THE US AND
CANADA

UNLESS OTHERWISE
SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS,
TOLERANCES
ARE ±0.5 AND
ANGLES ARE ±3°.

SIZE
A3



pui
audio™
a projects unlimited company

Designed by
J.D. Date
6/21/2006 E.P. Checked by
Date
6/21/2006 B.R. Approved by
Date
6/21/2006 2/27/2008 Drawn Date

AI-4228-P-FP250-R
UL Indicator

Edition
- Sheet
1 / 1