

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[PUI Audio, Inc.](#)
[AI-4328-P-FP250-R](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SPECIFICATIONS




PARAMETERS	VALUES	UNITS
RATED VOLTAGE	220	Vac
OPERATING VOLTAGE RANGE	60 ~ 250	Vdc/Vac
RATED CURRENT (MAX)	16	mA
MINIMUM SPL @ 10 CM	91	dBA
RESONANT FREQUENCY	2,800 ± 500	Hz
TONE OR PULSE RATE	FAST PULSE	3 pulse/sec
OPERATING TEMPERATURE	-30 ~ +85	°C
STORAGE TEMPERATURE	-40 ~ +95	°C
HOUSING MATERIAL	ABS	-
TERMINAL MATERIAL	Sn PLATED BRONZE	-
WEIGHT	63	grams

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO
 PROJECTS UNLIMITED, INC. ANY USE OR
 REPRODUCTION, IN ANY FORM, WITHOUT PRIOR
 WRITTEN PERMISSION OF PROJECTS UNLIMITED,
 INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	6/7/2006	
A	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	3/10/2008	B.R.

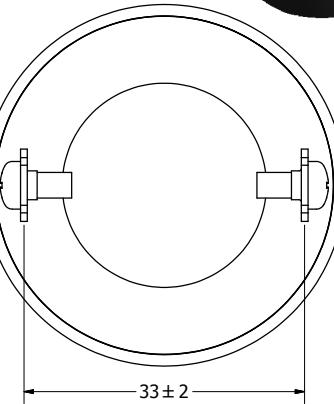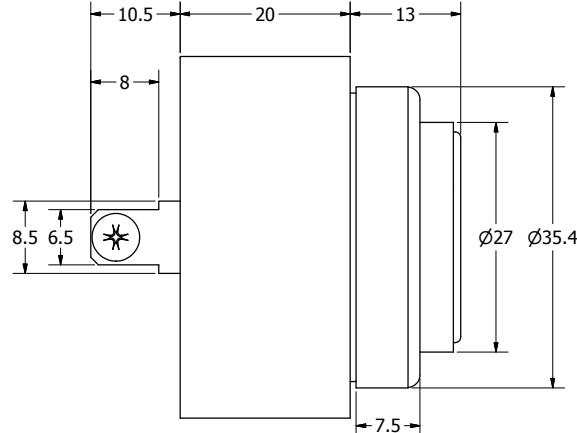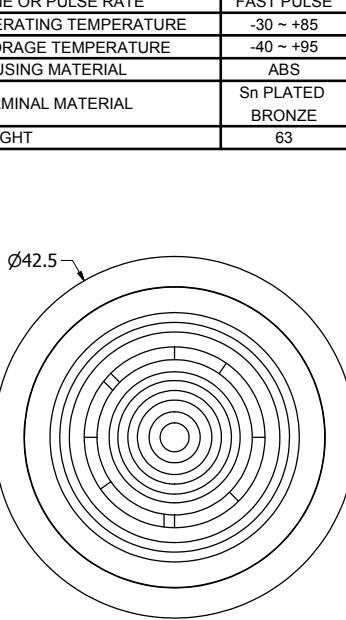

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	SIZE	Designed by J.D.	Date 6/7/2006	Checked by E.P.	Date 6/7/2006	Approved by B.R.	Date 6/7/2006	Drawn Date 3/10/2008
	A3							
 AI-4328-P-FP250-R Indicator								
AI-4328-P-FP250-R.idw							Edition -	Sheet 1 / 1