

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[PUI Audio, Inc.](#)
[XL-5020-TF-LW150-S-R](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE RANGE	3 ~ 16	Vdc
RATED CURRENT (MAX)	120	mA
MINIMUM SPL @ 10 CM	110	dBa
RESONANT FREQUENCY	2,000/2,600 ± 200	Hz
TONE OR PULSE RATE	SIREN	1.2 pulse /sec
OPERATING TEMPERATURE	-30 ~ +80	°C
STORAGE TEMPERATURE	-40 ~ +80	°C
HOUSING MATERIAL	ABS	-
TERMINAL MATERIAL	LEAD WIRES	-
WEIGHT	49	grams

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.

REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	6/5/2006	
A	REVISED RESONANT FREQUENCY	6/5/2009	B.R.
B	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	4/26/2010	B.R.

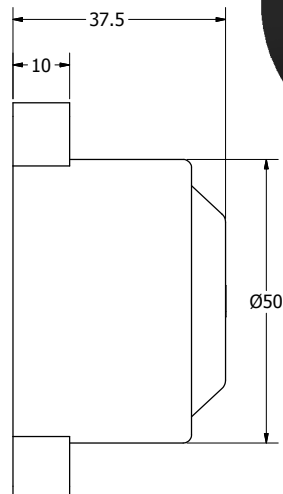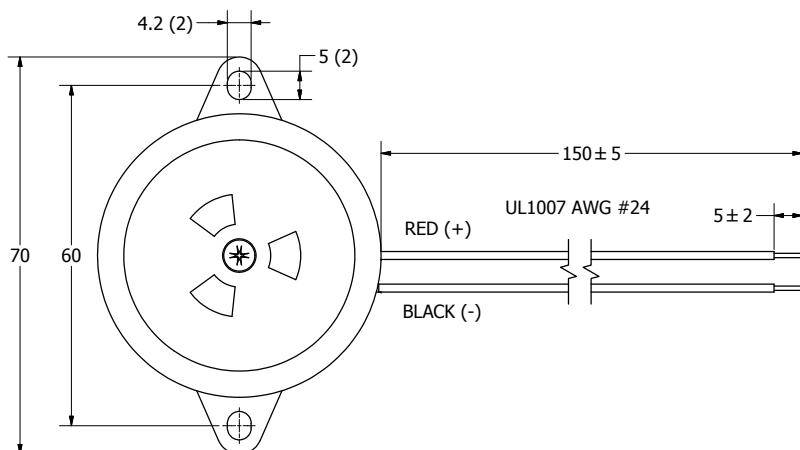

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS.
- SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	SIZE A3	Designed by J.D.	Date 6/5/2006	Checked by E.P.	Date 6/5/2006	Approved by B.R.	Date 6/5/2006	Drawn Date 4/26/2010
XL-5020-TF-LW150-S-R.idw		 pui audio a projects unlimited company		XL-5020-TF-LW150-S-R				
		Indicator		Edition -		Sheet 1 / 1		