

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Apex Microtechnology](#)
[TW03](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

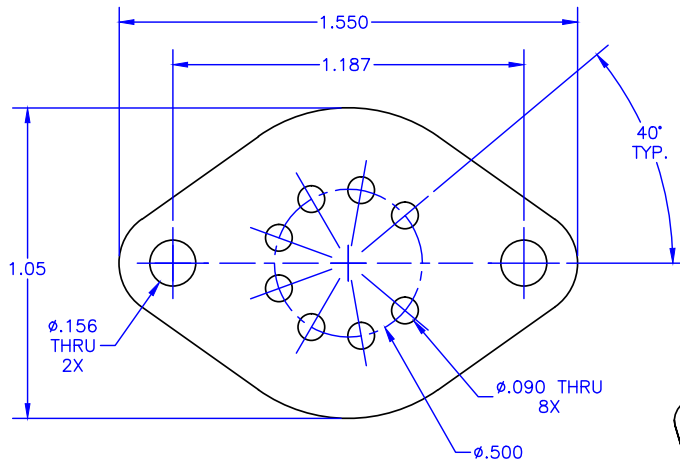

.003
See Notes 2 & 3.

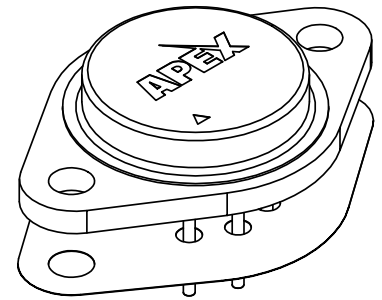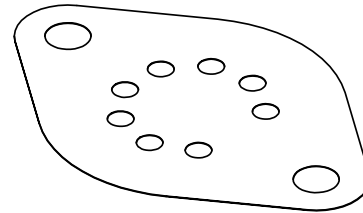

NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Foil Material: .002 thick 1145 aluminum
3. Interface Material: .0005 thick phase-change thermal compound, both sides.
Maximum shipping & storage temperature - 40°C
Reflow temperature - 60°C
Maximum recommended service temperature - 200°C
4. Thermal impedance: .030 °C/W-in² (.194 °C/W-cm²) @ 20psi
5. Used with T03 packages (Apex designator: CE).

TOLERANCES - UNLESS OTHERWISE SPECIFIED
.XX = ±.01 [.254]
.XXX = ±.005 [.127]
ANG. = ±5°



TITLE: THERMAL WASHER, T03				MODEL: TW03	
SUBJECT: MECHANICAL DRAWING					
ENGINEER: K.GOPP	DRAWN BY: J.FAY	DC: 16270	SH: 1	OF: 1	FILENAME: TW03
				REV: J	DATE: 11JUL16