

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Apex Microtechnology](#)
[TW10](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

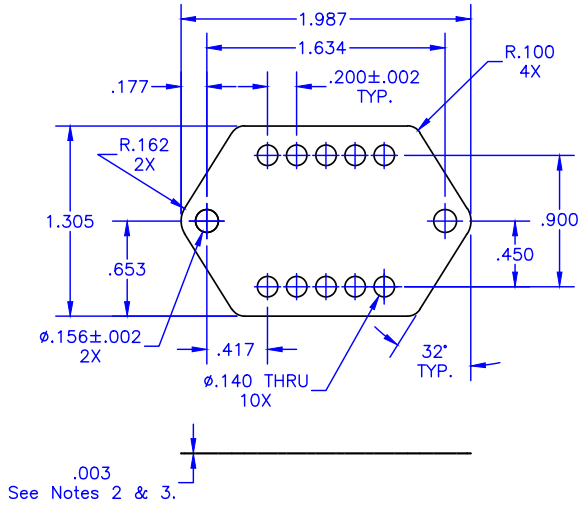

NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Foil Material: .002 thick 1145 aluminum
3. Interface Material: .0005 thick phase-change thermal compound, both sides.
Maximum shipping & storage temperature - 40°C
Reflow temperature - 60°C
Maximum recommended service temperature - 200°C
4. Thermal impedance: .030 °C/W-in² (.194 °C/W-cm²) @ 20psi
5. Used with 10-pin Power DIP package (Apex designator: DE).

TOLERANCES - UNLESS OTHERWISE SPECIFIED			TITLE: THERMAL WASHER, P-DIP				MODEL: TW10	
.XX = ±.01 [.254] .XXX = ±.005 [.127] ANG. = 25°			SUBJECT: MECHANICAL DRAWING					
ENGINEER: K.GOPP	DESIGNED BY: J.FAY	DCA: 16270	SH: 1	OF: 1	FILENAME: TW10	REV: I	DATE: 11JUL16	