

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Pomona Electronics](#)  
[4578](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



## Model 4578 BNC (Female) PCB Mount

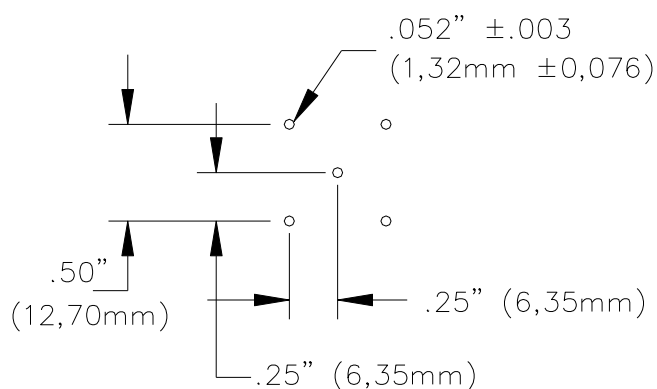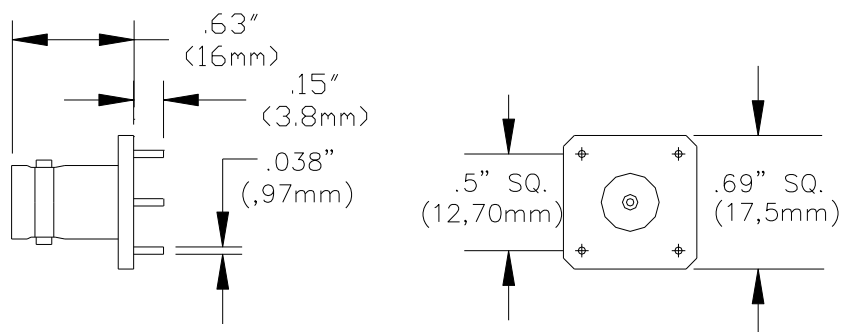

RECOMMENDED  
PC MOUNTING

### MATERIALS:

Body: Tarnish Resistant Nickel Plated Brass  
 Body Mounting Pins: Nickel Plated Brass  
 Center Contact: Gold Plated Beryllium Copper  
 Center Mounting Pin: Gold Plated Brass  
 Dielectric: Teflon per ASTM-D-1457

### RATINGS:

Operating Voltage: Hands free usage in controlled voltage environments: 500 Vrms maximum. *For CE compliance:* not intended for hand-held use at voltages above 33 Vrms/70 Vdc.  
 Operating Temperature: -85°F to +329°F (-65°C to +165°C).  
 Nominal Impedance: 50 Ohms

### ORDERING INFORMATION: Model 4578

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).  
 All specifications are to the latest revisions. Specifications are subject to change without notice.  
 Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)  
 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com