

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[Pulse Electronics Corporation](#)
[E5908-0TG0U4-L](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

A1RFRD10

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

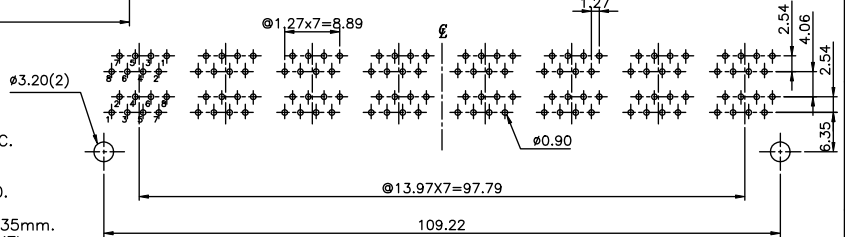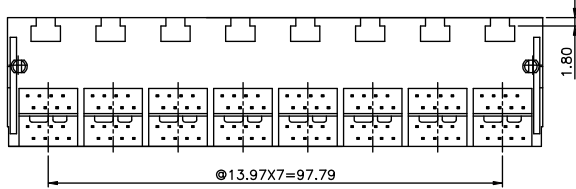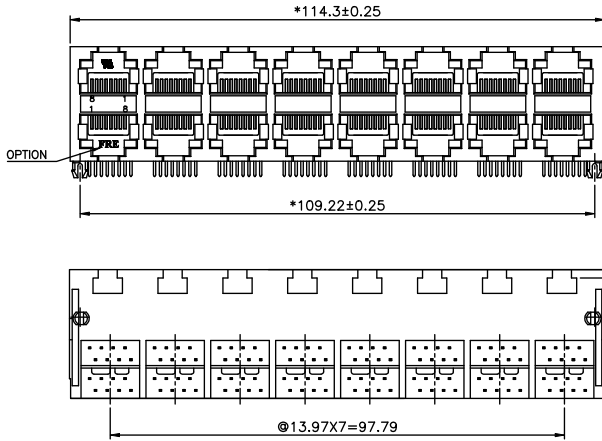

PC Board Layout Component Side Shown
Thickness=1.6mm

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT+30%G.F UL 94V-0.
- HOUSING COLOUR : BLACK.
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 230°C~250°C(5~10 SECONDS).

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. 163191

ROHS PART NUMBER: E5908-0TG0XX-L

4- W/ "FRE" LOGO 1- 3u" 2- 6u" 3-15u"
U- W/O "FRE" LOGO 4-30u" 5-50u"

TOLERANCES EXCEPT AS NOTED .0 ± 0.2 .00 ± 0.15 .000 ± 0.075 ANGLES ± 0.5 THIRD ANGLE PROJECTION	DFTO JAMY CHKD <input type="checkbox"/> DATE 10/25/05	FULL RISE ELECTRONIC CO., LTD	
	INFO APPL. <input type="checkbox"/> DATE <input type="checkbox"/>	TITLE STAMPED PIN III W/O SHIELD JACK, 2X8	
	MATERIAL : QTY : FINISH :	DRAWING NO. GE593B58-LC /PART NO. SEE NOTE	SIZE A3 REV 0
	SCALE : 1.25 : 1	DO NOT SCALE DRAWING	SHEET 1 OF 1

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1