

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Pulse Electronics Corporation](#)


[E6688-120213-L](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

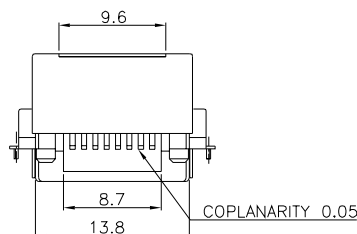


SEE "A"

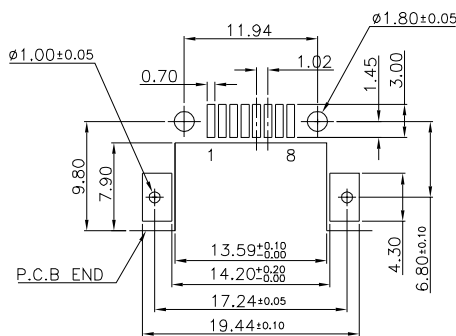

PC Board Layout T=1.6mm

Component Side Shown Tolerance±0.05mm



C-C

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 35 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- SHIELD MATERIAL : BRASS, t=0.25mm.
- HOUSING & INSERT MATERIAL: NYLON UL94V-0
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : 1: CONTACT AREA- SELECTIVE GOLD PLATING.
2: TAILS- 150u" TIN MIN OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE TEMPERATURE : -40°C TO +85°C.
- OPERATION TEMPERATURE: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 255~265°C (5~10SECONDS)
- RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER	GOLD PLATING
E6688-120211-L	3u"
E6688-120212-L	6u"
E6688-120213-L	15u"
E6688-120214-L	30u"

RoHS Compliant Pulse A TECHNOLOG COMPANY		TITLE PHONE JACK RJ45 SMD	
DFTO Cathy DATE 08/21/2006 SCALE : 3:1		DRAWING NO. CE663A05-LA /PART NO. SEE TABLE DO NOT SCALE DRAWING	
DETACHED LISTS MM (INCH) TOLERANCES EXCEPT AS NOTED MM .01 ± 0.2 .00 ± 0.15 .000 ± 0.075 ANGLES ± 0.5 THIRD ANGLE PROJECTION		SIZE A3 REV 0 SHEET 1 OF 1	