

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[TL3302BF260QG](#)




For any questions, you can email us directly:

sales@integrated-circuit.com



SHEET 1 OF 1

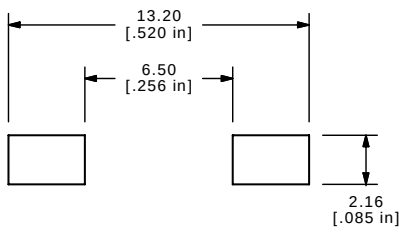

RECOMMENDED P.C.B. LAYOUT



ISOMETRIC

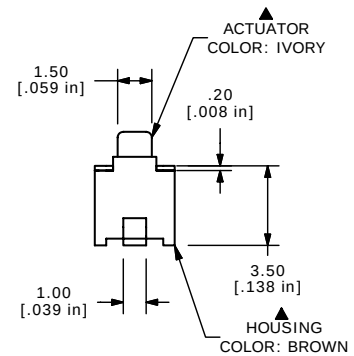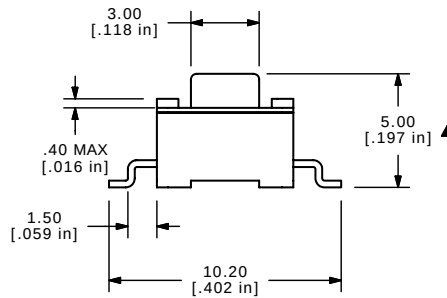

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATING: 12VDC, 50mA
 - ▲ 5. OPERATING FORCE: 260 ± 50gf
 6. TRAVEL: 0.25mm +0.2/-0.1MM
 7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
 8. MECHANICAL/ELECTRICAL LIFE: 30,000 CYCLES.
 - ▲ 9. CONTACT MATERIAL: SILVER
 - ▲ 10. PACKAGE: TAPE AND REEL, 1800 PER
 11. ▲ DENOTES CRITICAL PARAMETER
 12. 2002/95/EC (ROHS) COMPLIANT

					E-SWITCH®				
B	16683	UPDATED NOTES	11/21/2006	TN	TITLE TL3302BF260QG				
A	14707	RELEASED FOR PRODUCTION	2/17/05	AR					
REV	PCR NO	DESCRIPTION	DATE	BY	SCALE 4:1	DATE 11/21/2006	DR TN	DWG P020334	REV B
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									