

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Apem Inc.](#)
[MA12RTR](#)


For any questions, you can email us directly:
sales@integrated-circuit.com

MA Series


Microminiature Memory Card Slide Switches

SPECIFICATIONS	FEATURES
<p>Contact rating: 300 mA at 4 VDC Initial contact resistance: 70 milliohms max. Insulation resistance: 100 megohms min. at 100 VDC Dielectric strength: 100 VAC for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -10°C to +60°C Actuation force: 200g ± 100g Solder heat resistance: Reflow - 260°C max. for 1 min. Manual - iron temperature 305 °C max. for 6 seconds. Washing not recommended</p>	<ul style="list-style-type: none"> ● Ultra-compact size. ● Low Profile. ● Surface mounting with restraining bosses. ● Reflow or hand solderable.
MATERIALS	
	<p>Contacts: Silver plated beryllium copper Terminals: Silver plated brass Base: Liquid crystal polymer Cover: Tin plated steel Actuator: Liquid crystal polymer</p>

MODEL NO.
MA12R
RIGHT ANGLE ACTUATOR

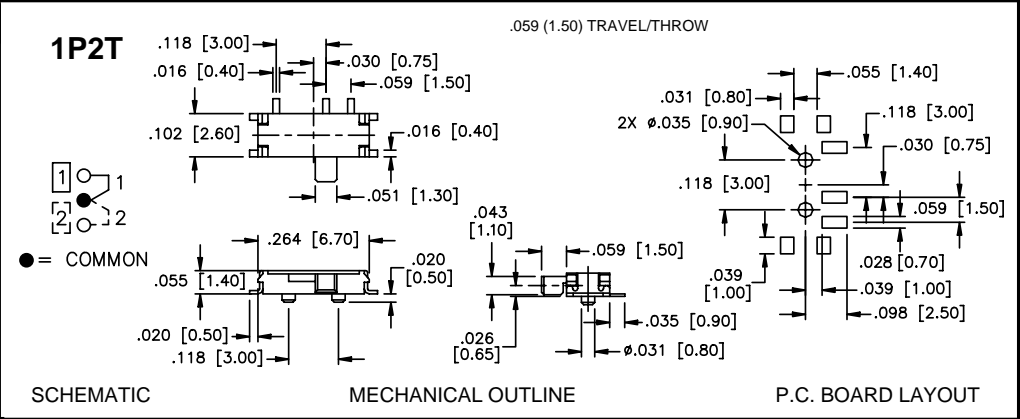

MODEL NO.												
MA12R/TR MA13R/TR												
Same as above models except supplied on tape & reel as shown.												
<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Model No.</th> <th>Dim. A</th> <th>Dim. B</th> <th>Dim. C</th> </tr> </thead> <tbody> <tr> <td>MA12RTR</td> <td>.630 (16.0)</td> <td>.217 (5.5)</td> <td>.646 (16.4)</td> </tr> <tr> <td>MA13RTR</td> <td>.945 (24.0)</td> <td>.453 (11.5)</td> <td>.960 (24.4)</td> </tr> </tbody> </table>	Model No.	Dim. A	Dim. B	Dim. C	MA12RTR	.630 (16.0)	.217 (5.5)	.646 (16.4)	MA13RTR	.945 (24.0)	.453 (11.5)	.960 (24.4)
Model No.	Dim. A	Dim. B	Dim. C									
MA12RTR	.630 (16.0)	.217 (5.5)	.646 (16.4)									
MA13RTR	.945 (24.0)	.453 (11.5)	.960 (24.4)									

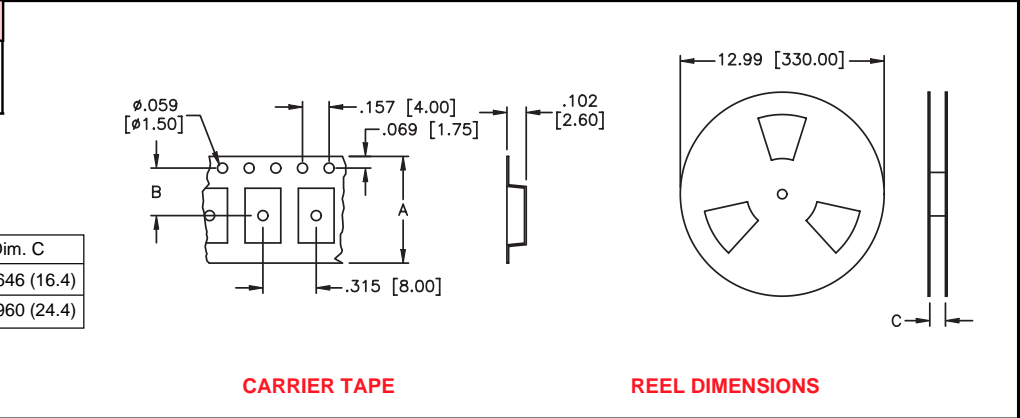

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE