

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)  
[1003P1T1B1M52QE](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)





| SWITCH FUNCTION |        |                |
|-----------------|--------|----------------|
| POS. 1          | POS. 2 | POS. 3         |
| DN              | NONE   | DN             |
| 2-3,5-6<br>8-9  | OPEN   | 2-1,5-4<br>8-7 |



CIRCUIT: 3PDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC; 2A @250VAC
5. FIXED TERM. & MOVING CONTACT: Copper Alloy w/Silver Plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C
10. SUPPLIED HARDWARE- HEX NUT (2) LOCK RING, AND LOCK WASHER.

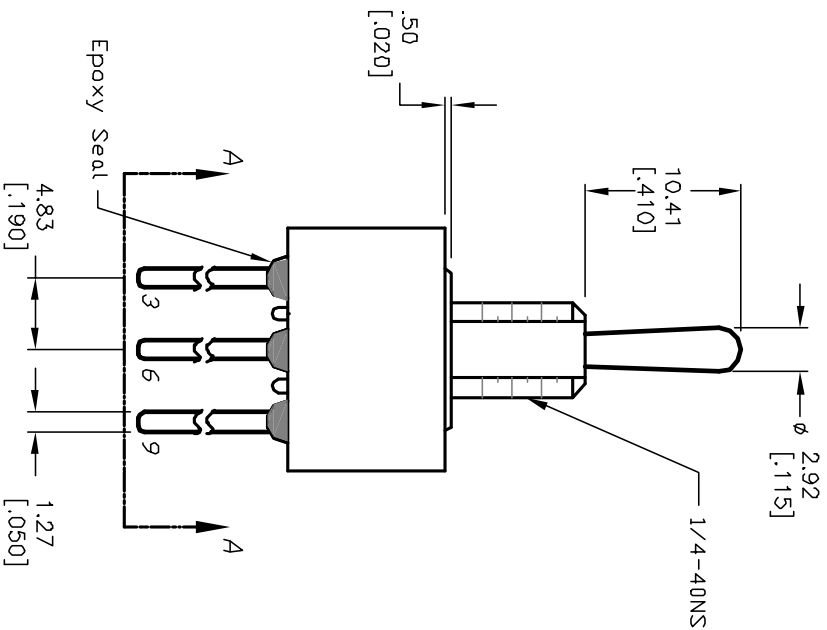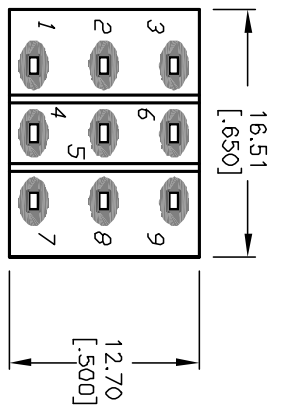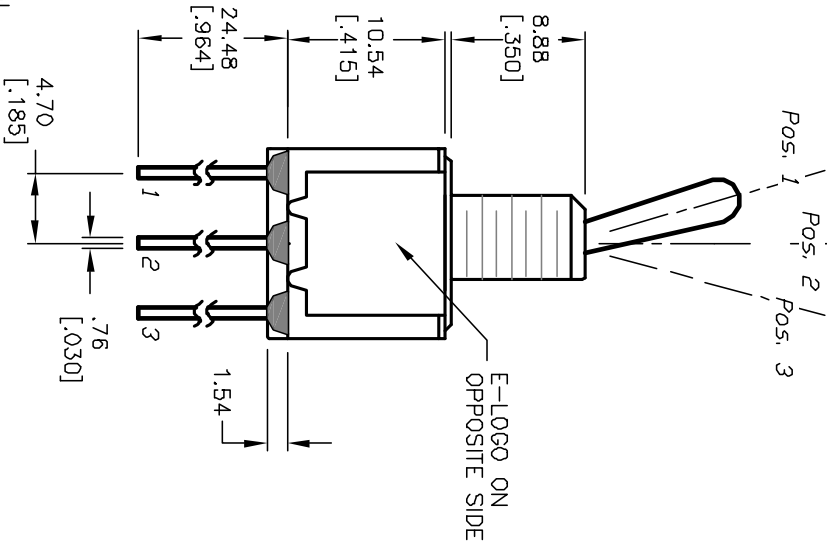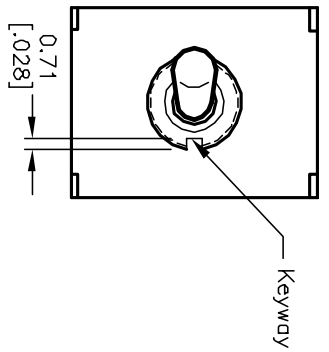

**E-SWITCH®**

100 3P-1 T1 B1 M5-2 Q E

|         |       |             |         |      |
|---------|-------|-------------|---------|------|
| REV. A  | 12326 | RELEASED    | 7/24/02 | CJB  |
| ECN No. |       | DESCRIPTION | DATE    | CHKD |

|       |         |    |         |     |
|-------|---------|----|---------|-----|
| SCALE | DATE    | DR | DWG     | REV |
| 2:1   | 7/24/02 | cb | T131034 | A   |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED