

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)
[1003P2T6B11M1QE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	(DN)
2-3,5-6 8-9	OPEN	2-1,5-4 8-7



() =Momentary



CIRCUIT: 3PDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC; 2A @250VAC
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/Silver Plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C
10. SUPPLIED HARDWARE- HEX NUT (2) LOCK RING, AND LOCK WASHER.

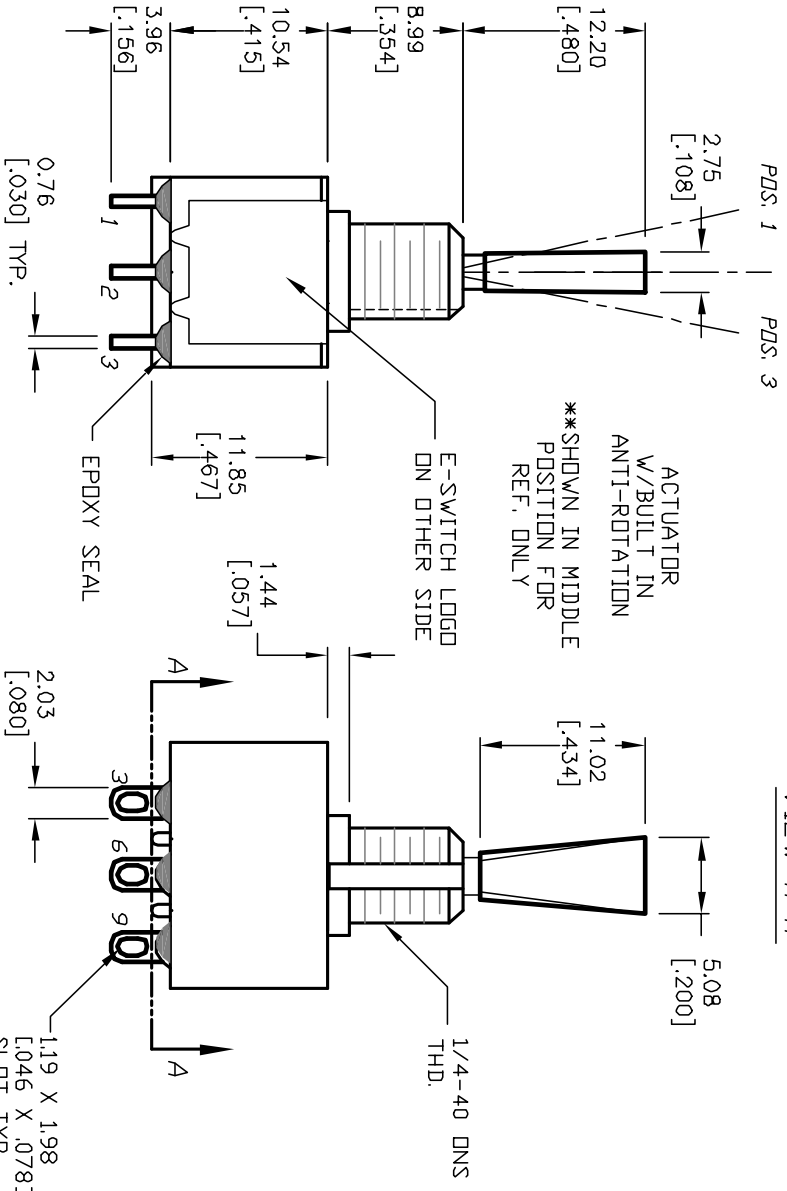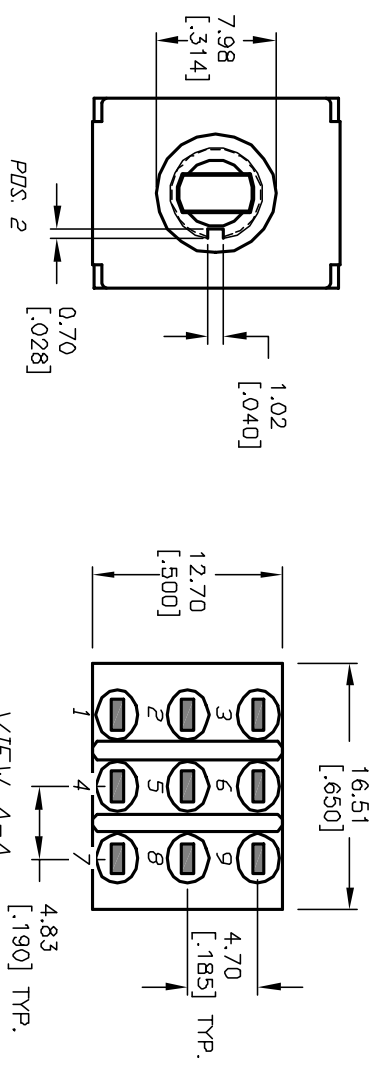

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12273	RELEASED FOR PRODUCTION	6/27/02	CJB

TITLE	SCALE	DATE	DR	DWG	REV
100 3P2 T6 B11 M1 Q E	2:1	6/12/02	CJB	T131026	A

E-SWITCH®

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED