

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)
[1003P3T1B1M7QE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

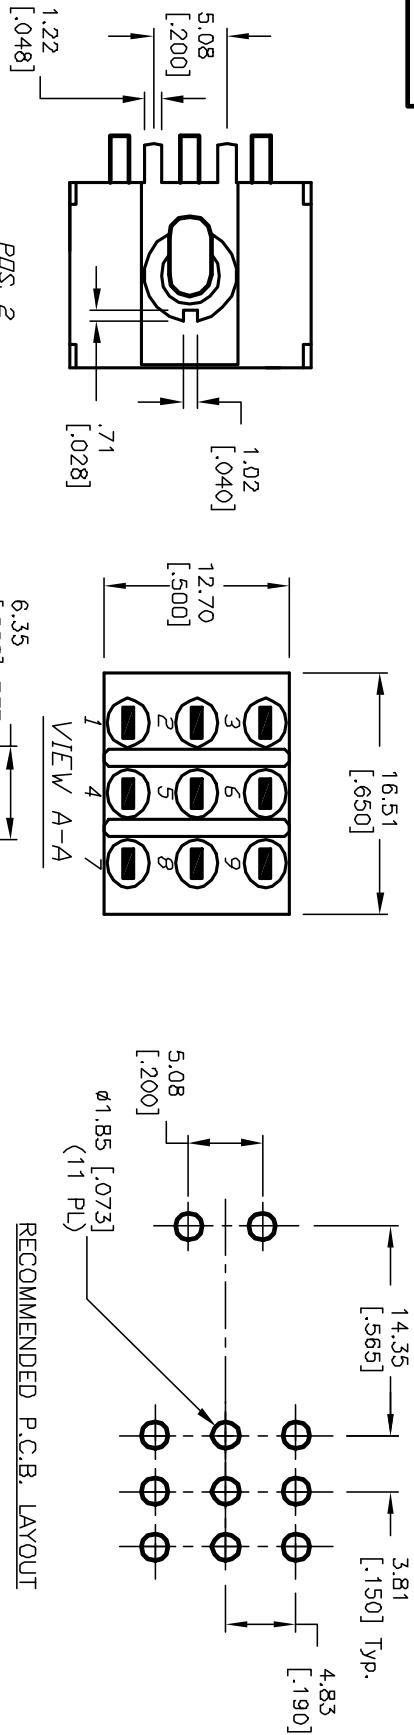


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	DPFF	DN
2-3,5-6 8-9	DPEN	2-1,5-4 8-7



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 5A @120VAC or 28VDC;
2A @250VAC.
5. CONTACT MATERIAL:
Copper Alloy W/SILVER Plate
6. ELECTRIC LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C

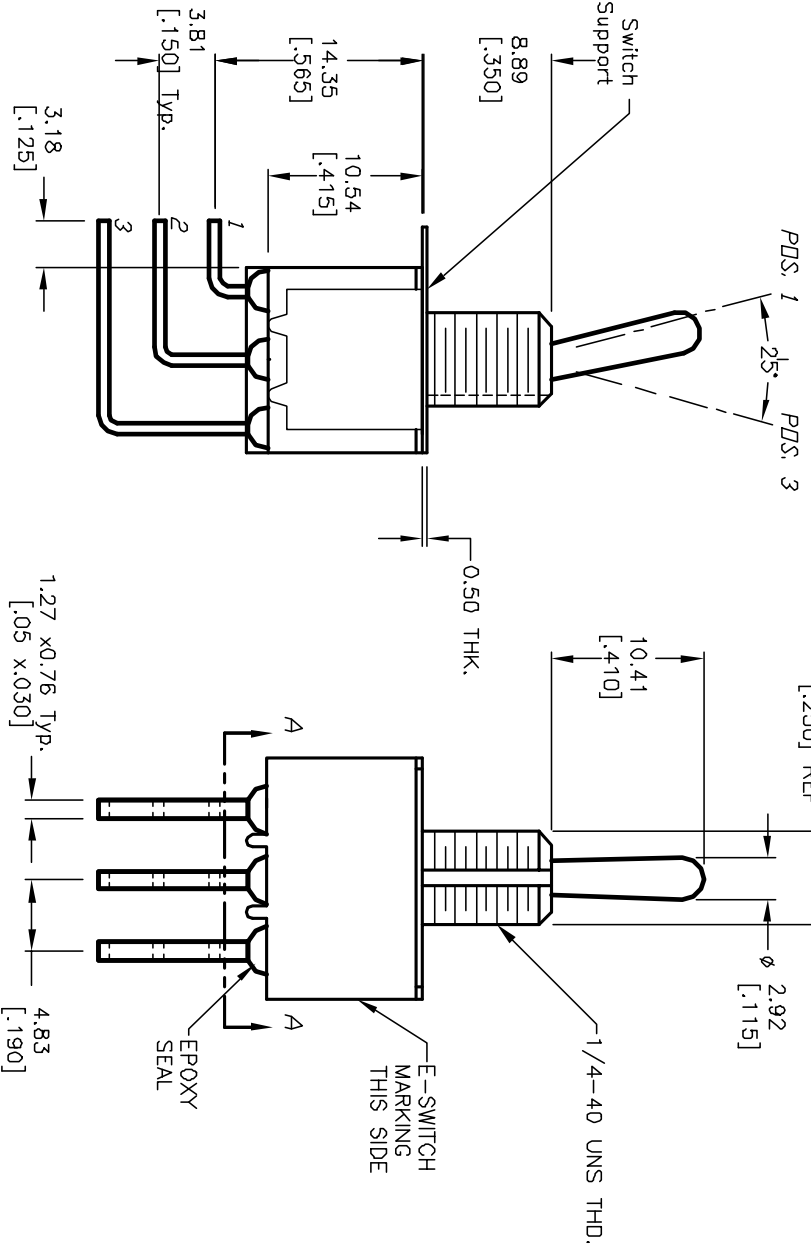

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12078	RELEASED FOR PRODUCTION	4/19/02	CJB
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED				

TITLE		SCALE	DATE	DR	DWG	REV
100 3P-3 T1 B1 M7 Q E		2:1	4/19/02	CB	T135013	A

E-SWITCH®