

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[1003P4T1B3M3QE](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

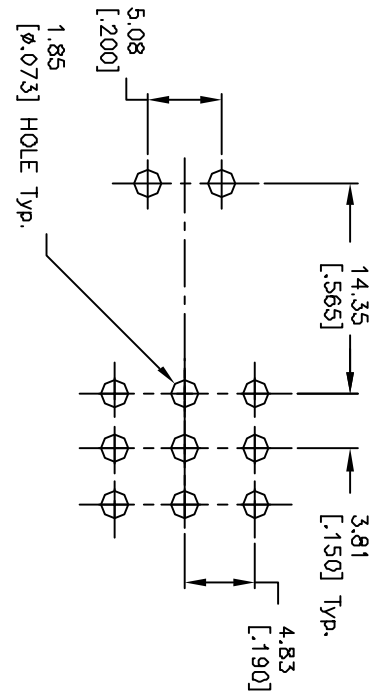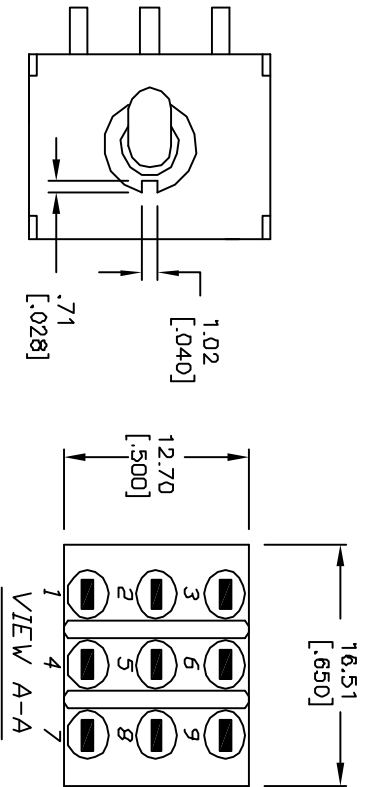

RECOMMENDED P.C.B. LAYOUT


SWITCH FUNCTION	PDS. 1	PDS. 2	PDS. 3
(DN)	(DN)	(DN)	(DN)
2-3,5-6 8-9	OPEN	(DN)	2-1,5-4 8-7

(DN)=NON-DEFINITIVE



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X±±0.4
X.XX±±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 2A @250VAC; 5A @120VAC
5. CONTACT MATERIAL:
Copper Alloy W/SILVER Plate over
Nickel plate.
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

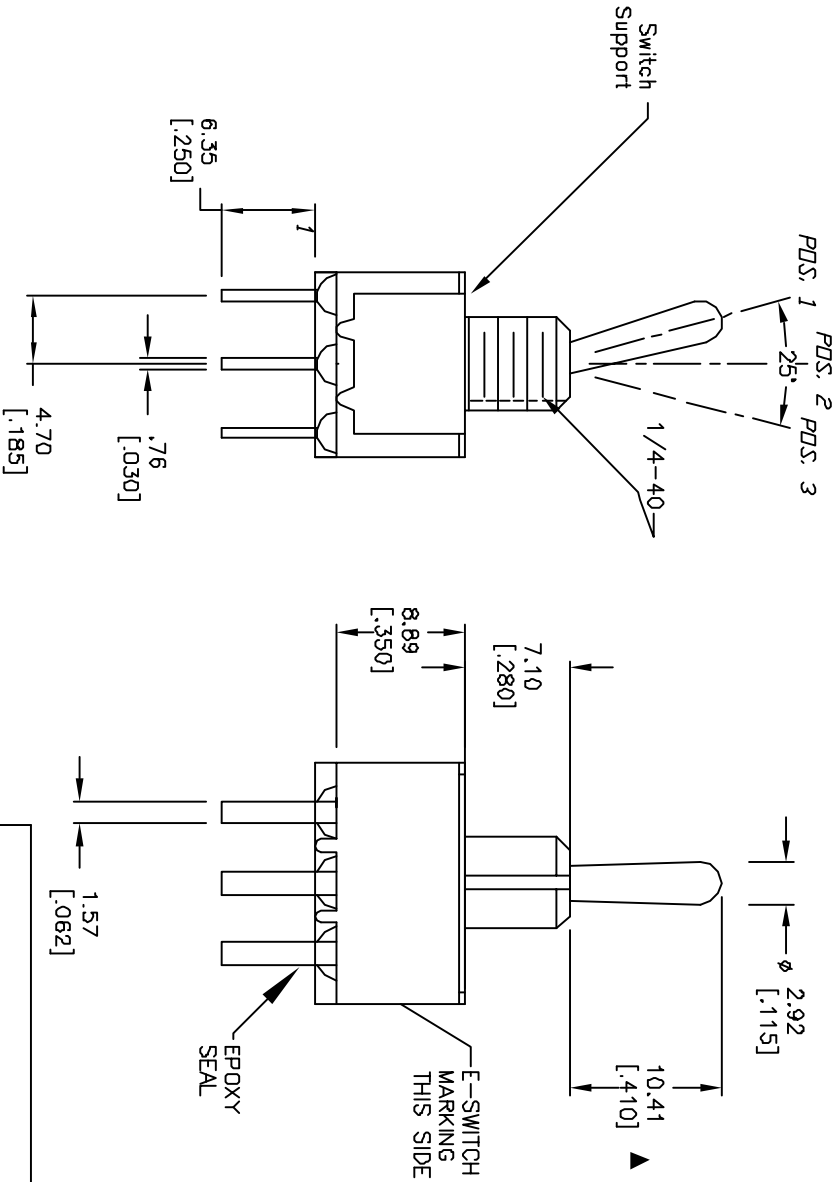

E-SWITCH®

100 3P-4 T1 B4 M3 Q E

REV. A	ECN No. 12805	NEW RELEASE	DATE 2/11/03	RC
		DESCRIPTION	CHKD	

SCALE 2:1	DATE 2/11/03	DR RC	DWG T134005	REV A
TITLE 100 3P-4 T1 B4 M3 Q E				

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED