

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)
[100SP1T1B2M2QE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

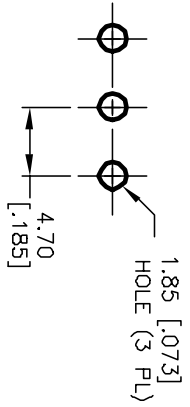

RECOMMENDED P.C.B. LAYOUT





CIRCUIT: SPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NONE	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NDS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC,
2A @250VAC
5. FIXED TERMINAL/MOVING CONTACT:
Copper Alloy W/Silver Plating.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to +85°C

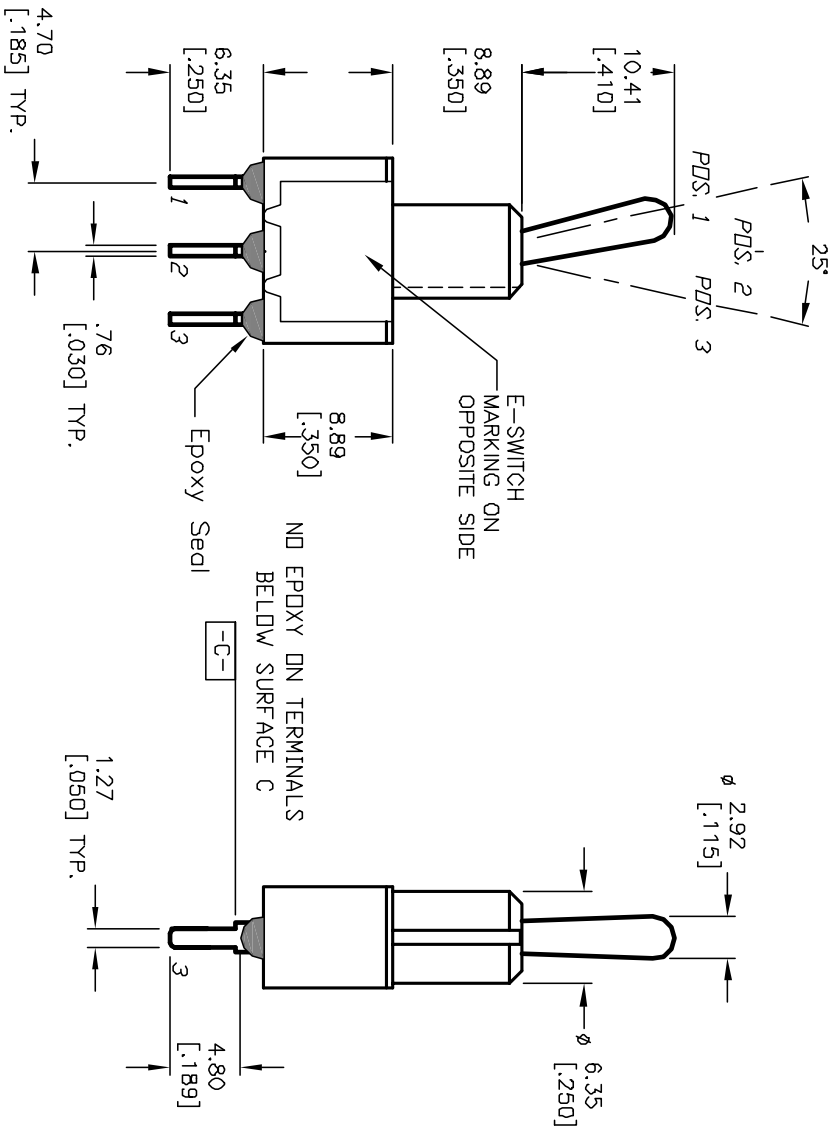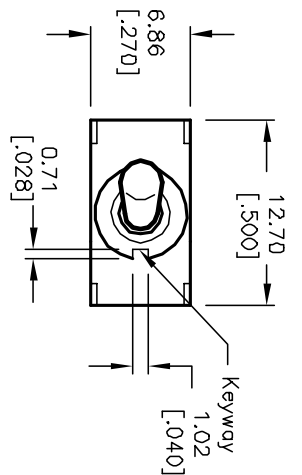

E-SWITCH®

100 SP-1 T1 B2 M2 Q E

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12598	RELEASED FOR PRODUCTION	11/27/02	CJB

TITLE	SCALE	DATE	DR	DWG	REV
100 SP-1 T1 B2 M2 Q E	2:1	11/27/02	CJB	T110022	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED