

Excellent Integrated System Limited

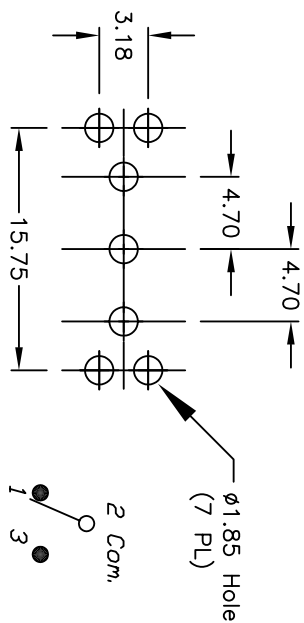
Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[100SP2T1B1VS2QEH](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

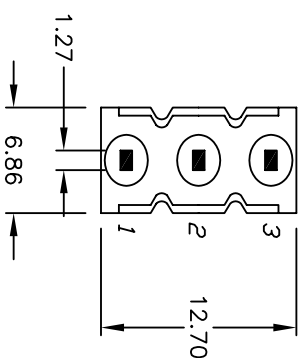
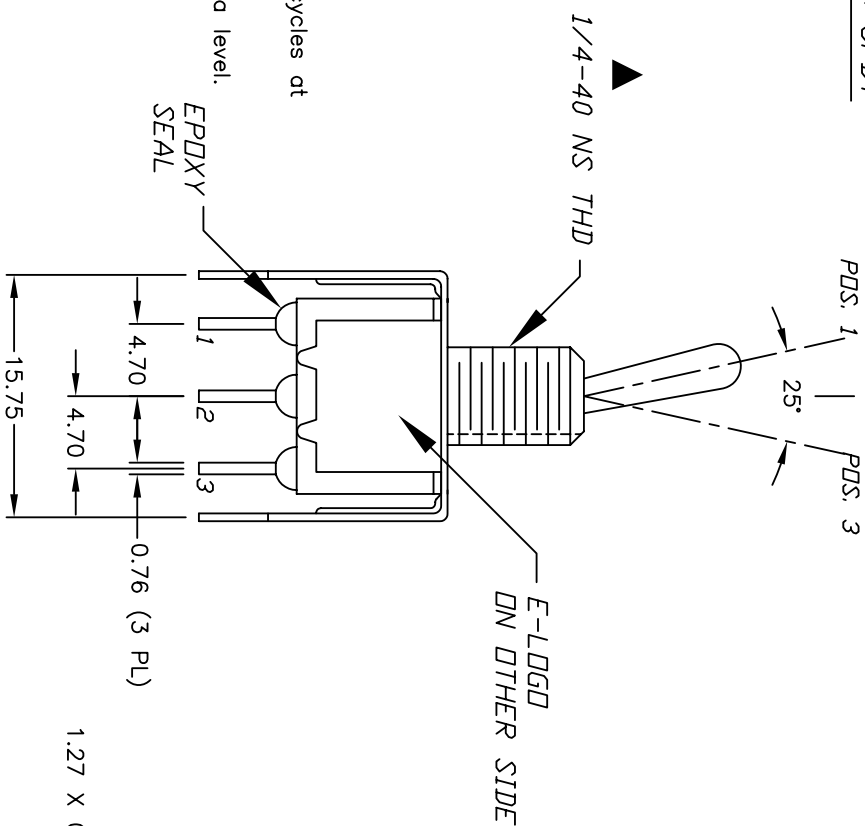
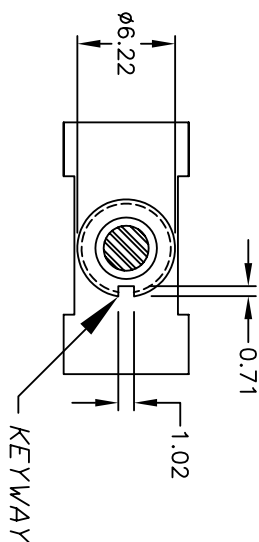
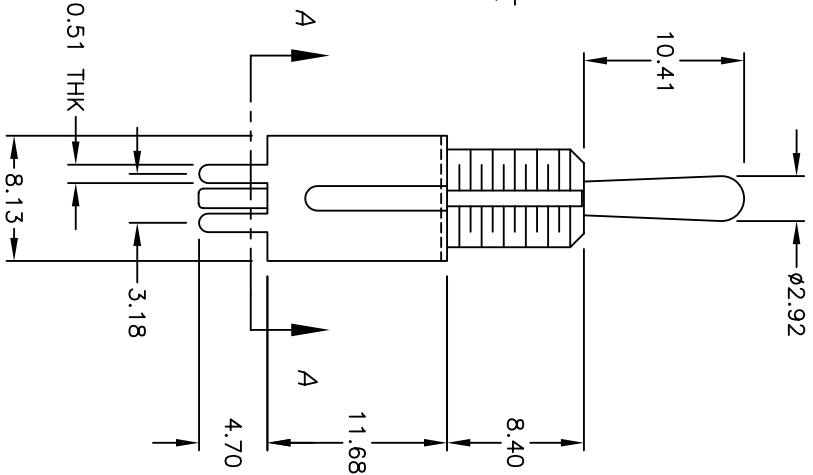
RECOMMENDED P.C.B. LAYOUT CIRCUIT: SPDT

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	NONE	(DN)	
2-3	DPEN	2-1	

NOTES:

() = Momentary

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC
2A @250VAC w/Resistive loads
5. FIXED TERM. & MOVING CONTACT:
Copper alloy w/SILVER plate
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS min. @sea level.
9. OPERATING TEMP.: -30°C to +85°C
10. 2002/95/EC (ROHS) COMPLIANT
11. HARDWARE TO BE SHIPPED BULK:
T100011-LOCK WASHER QTY-1
T100015-LOCK RING QTY-1
T100000-HEX NUT QTY-2

VIEW A-A**E-SWITCH®**

B	15538	DIM FROM 8.89 TO 8.40	11/16/05	PH
A	15483	RELEASED FOR PRODUCTION	11/1/05	PH
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE	100 SP-2 T1 B1 VS2 Q EH	SCALE	2:1	DATE	11/1/05	DR	PH	DWG	ST110016	REV	B
-------	-------------------------	-------	-----	------	---------	----	----	-----	----------	-----	---