

## Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[E-Switch](#)  
[200AWMDP1T1A1VS2RE](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

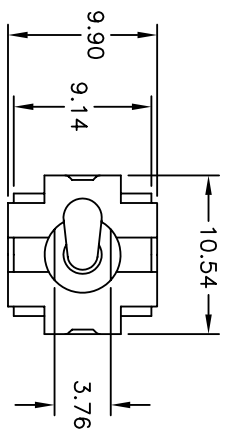


VIEW A-A  
BRACKET NOT SHOWN

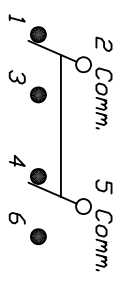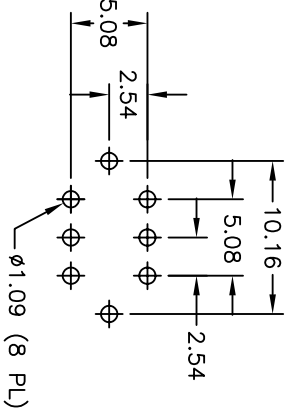

CIRCUIT: DPDT

SWITCH FUNCTION		
PQS. 1	PQS. 2	PQS. 3
DN	NONE	DN
2-3, 5-6	DPEN	2-1, 5-4

CONTACT CONFIGURATION

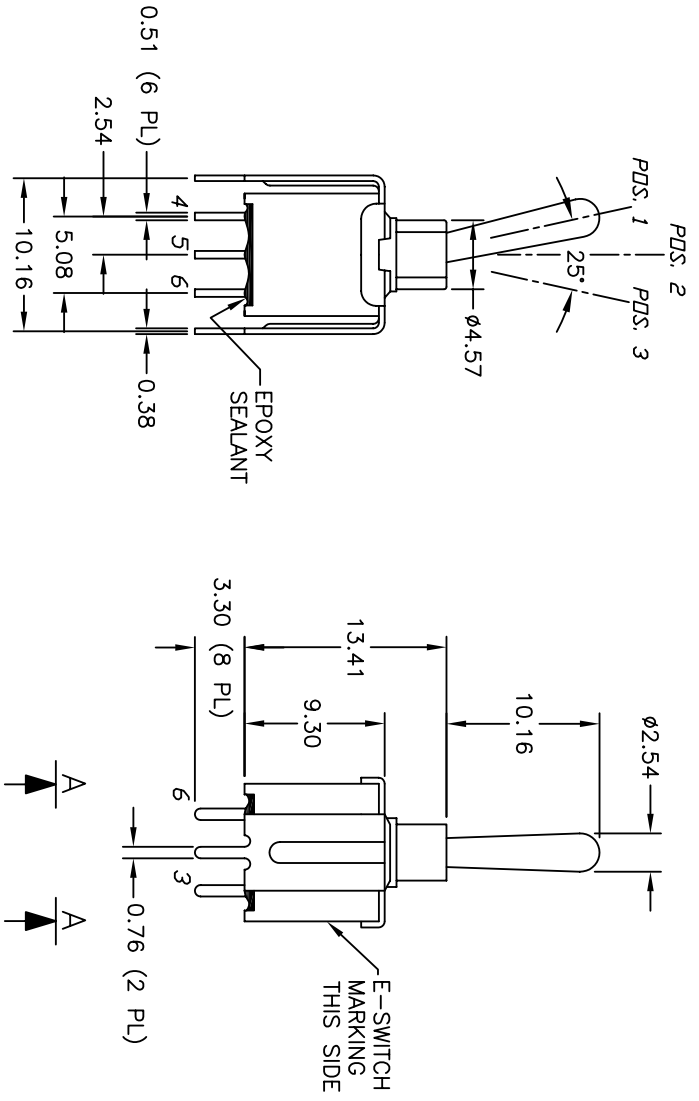

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4  
0.00=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 0.4 VA @ 20VAC OR DC
5. ELECTRIC LIFE: 50,000 make-and-break cycles at full load.
6. INSULATION RESISTANCE: 1,000 Mega-ohm min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C

**E-SWITCH®**

TITLE 200A WMDP1 T1 A1 VS2 R

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	10702	RELEASED FOR PRODUCTION	6/27/00	GLG

SCALE	DATE	DR	DWG	REV
2:1	6/27/00	GLG	T201227	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

