

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[200AWMSP1T2A1M6QE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET OF

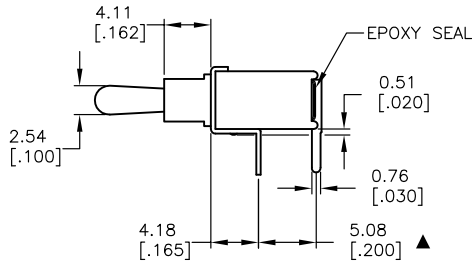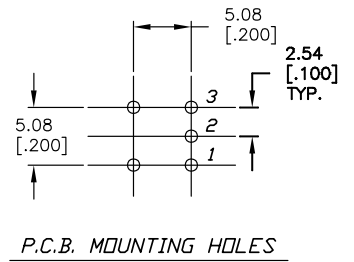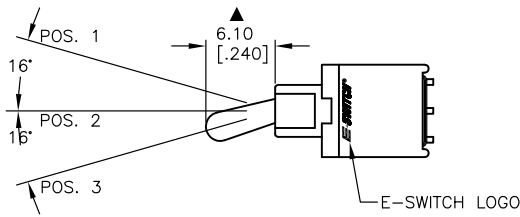

CONTACT CONFIGURATION

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: $X, \bar{X} = \pm 0.4$
 $X, XX = \pm 0.25$
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 3 AMPS @120VAC OR 28 VDC
1 AMPS @250VAC
 5. FIXED TERM. & MOVING CONTACT: SILVER PLATED COPPER ALLOY
 6. ELECTRICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 7. INSULATION RESISTANCE: 1000M OHM MIN.
 8. DIELECTRIC STRENGTH: 1000V RMS MIN. @SEA LEVEL.
 9. OPERATING TEMP.: -30°C to 85°C
 10. ▲ DENOTES CRITICAL PARAMETER

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3	OPEN	2-1

E-SWITCH®

200AWMSP1T2A1M6QE

REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
A	13872	RELEASED FOR PRODUCTION	3/25/04	AR	2:1	3/25/04	AR	T201116	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED