

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[200MDP1T2B2M2RE](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET OF

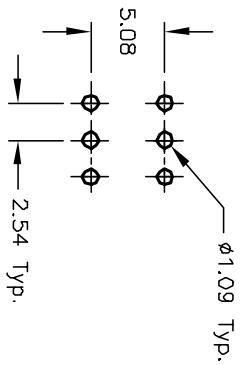

RECOMMENDED P.C.B. LAYOUT



CIRCUIT: DPDT
 CONTACT CONFIGURATION



SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NDNE	DN
2-3,5-6	OPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4VA max. @20VAC or DC
5. FIXED TERM/MOVING CONTACT:

COPPER ALLOY w/GOLD PLATE OVER
 Nickel plate.

6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C

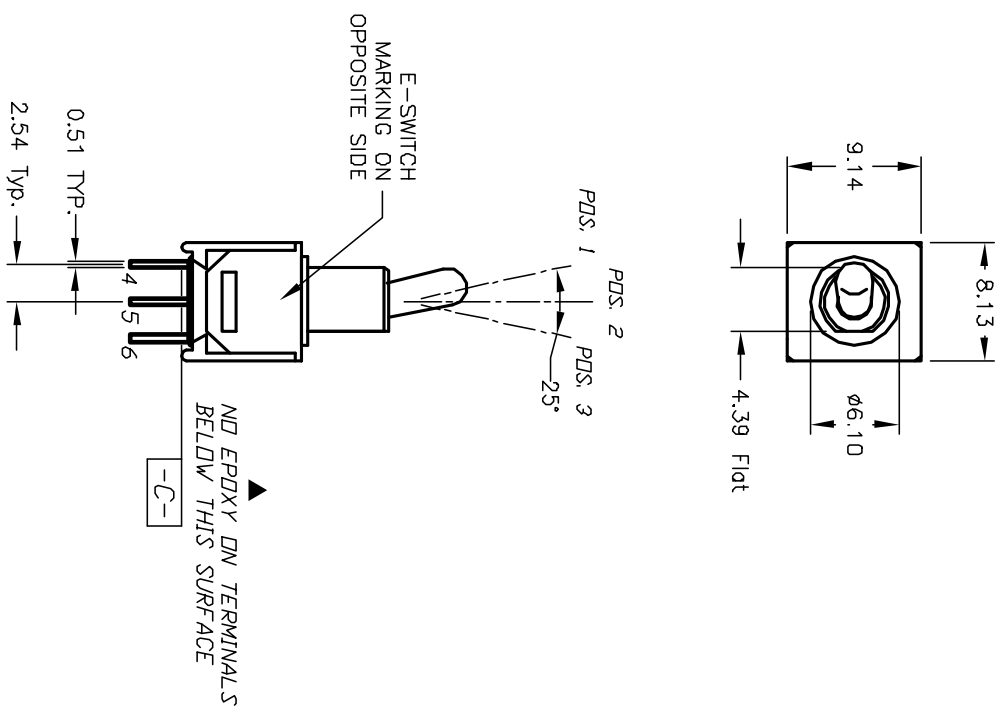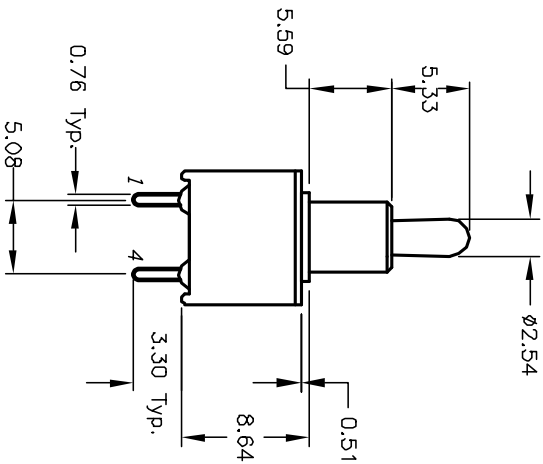

B			
A	12860	RELEASED FOR PRODUCTION	2/28/03 CB
REV.	ECN No.	DESCRIPTION	DATE CHKD

TITLE			
200 MDP-1 T2 B2 M2 R E (GOLD CONTACTS)			
SCALE	DATE	DR	DWG
2:1	2/28/03	CB	T221045
REV			
A			

E-SWITCH®