

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[200MDP3T2B1M6QE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



SHEET OF






CIRCUIT: DPDT

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
(DN)	(OFF)	(ON)	
2-3,5-6	OPEN	2-1,5-4	

()=MOMENTARY

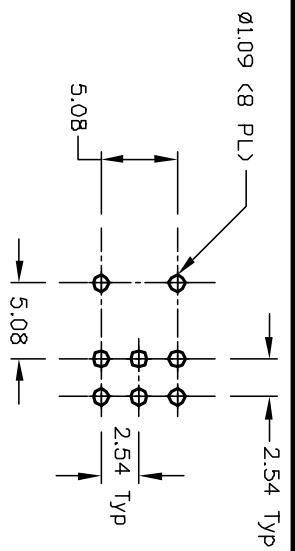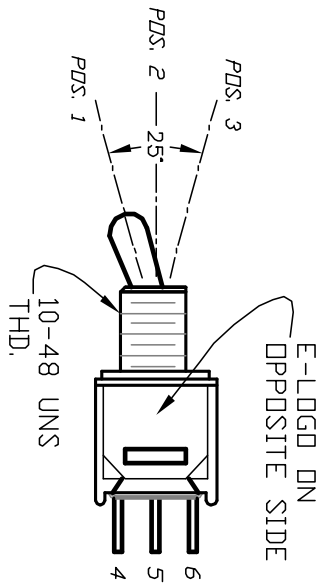

RECOMMENDED P.C.B. LAYOUT

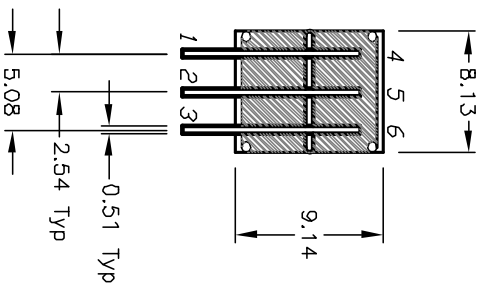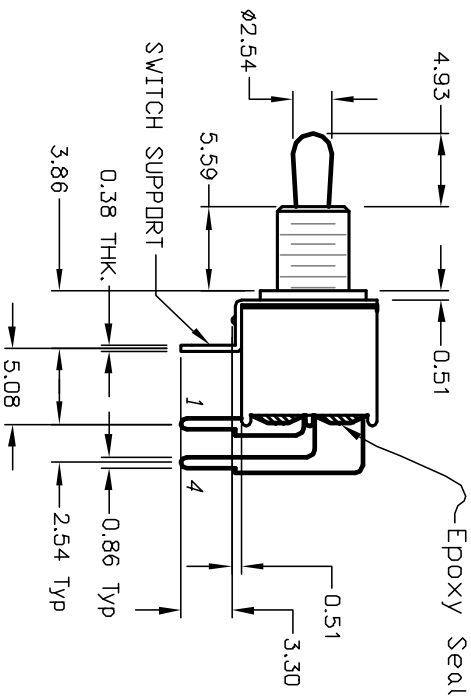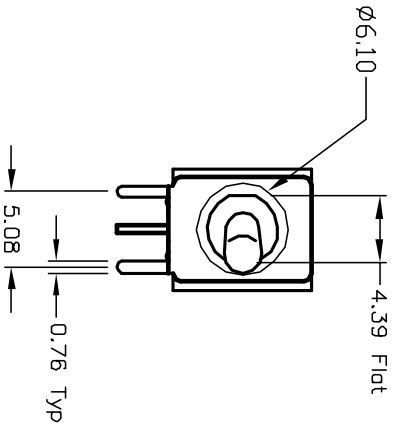

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 3A @120V AC or 28VDC;
1A @250V AC
5. FIXED TERMINAL & MOVING CONTACT:
COPPER ALLOY W/Silver plate
6. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12312	RELEASED FOR PRODUCTION	7/19/02	CJB

TITLE				
200 MDP-3 T2 B1 M6 Q E				
E-SWITCH®				
SCALE	DATE	DR	DWG	REV
2:1	--	--	T221010	A