


Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[200MDP3T4B5M2RE](#)

For any questions, you can email us directly:
sales@integrated-circuit.com





RECOMMENDED P.C.B. LAYOUT



| SWITCH FUNCTION | | |
|-----------------|--------|---------|
| PDS. 1 | PDS. 2 | PDS. 3 |
| DN | DEF | DN |
| 2-3,5-6 | DPEN | 2-1,5-4 |

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V AC OR DC max.
5. FIXED TERMINAL/MOVING CONTACT:
COPPER ALLOY w/Gold plate over
Nickel plate.
6. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP. -30°C to +85°C
10. ▲ DESIGNATE MAJOR FEATURE

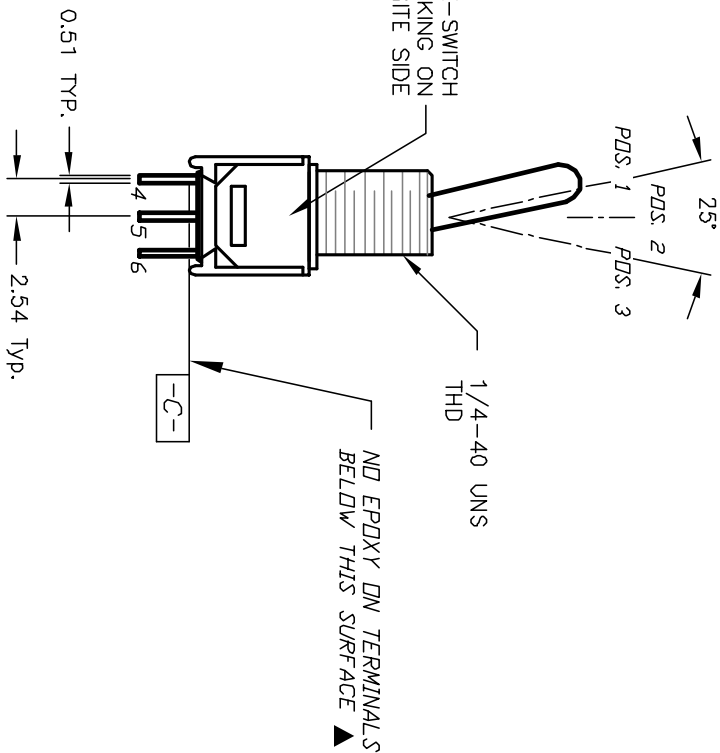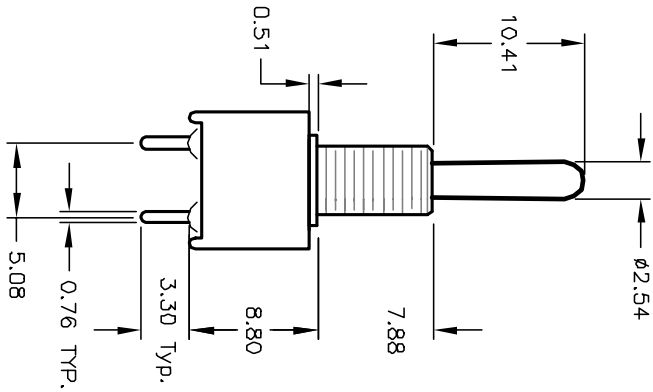

| REV. | ECN No. | DESCRIPTION | DATE | CHKD |
|------|---------|--|---------|------|
| A | 11966 | RELEASED FOR PRODUCTION | 9/12/02 | CJB |
| | | THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED | | CHKD |

| TITLE | SCALE | DATE | DR | DWG | REV |
|---------------------------------------|-------|---------|-----|----------|-----|
| 200 MDP-3 T4 B5 M2 RE (GOLD CONTACTS) | 2:1 | 9/12/02 | CJB | T2222010 | A |

E-SWITCH®