

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[200MSP1T1B4M7QE](#)



For any questions, you can email us directly:

sales@integrated-circuit.com



CIRCUIT: SPDT
 CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3	OPEN	2-1

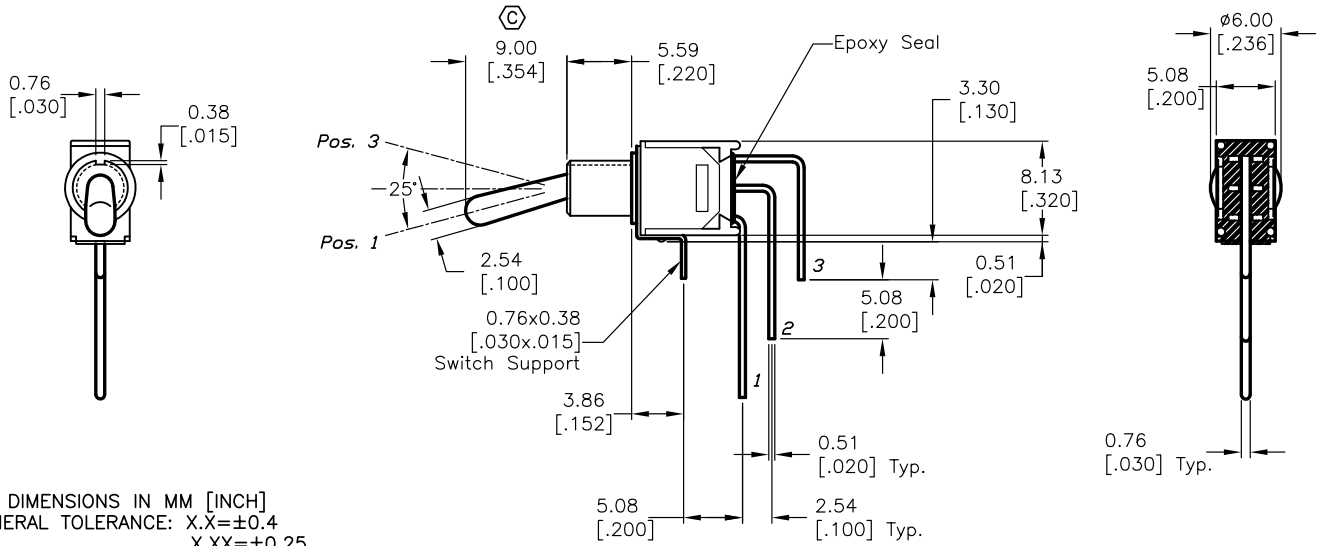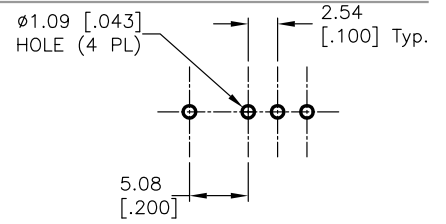

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 3A @120VAC or 28VDC; 1A @250VAC.
- FIXED TERM. MOVING CONTACT: Silver plated Copper alloy
- ELECTRICAL LIFE: 30,000 make-and-break cycle at full load.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C

E-SWITCH®

TITLE				200MSP1T1B4M7QE			
SCALE	DATE	DR	DWG	REV			
2:1	6/29/01	CB	T211032	C			

C	13760	CORRECT ACTUATOR	2/10/04	AR
B	11553	REVISED	6/29/01	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED