

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[200MSP2T2B4M6QE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



SHEET OF






CIRCUIT: SPDT

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	NONE	(DN)	
2-3	N/A	2-1	

(MOMENTARY)

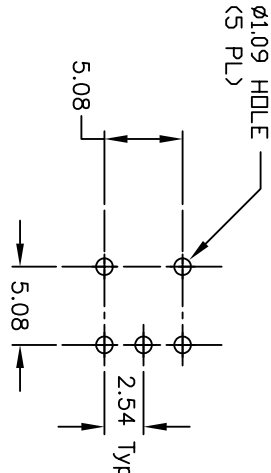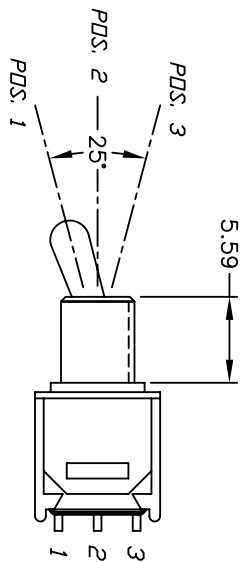

RECOMMENDED P.C.B LAYOUT

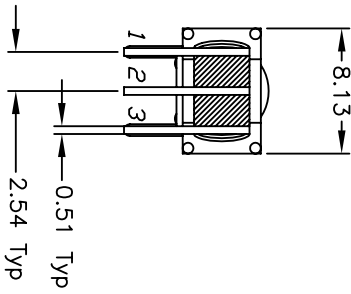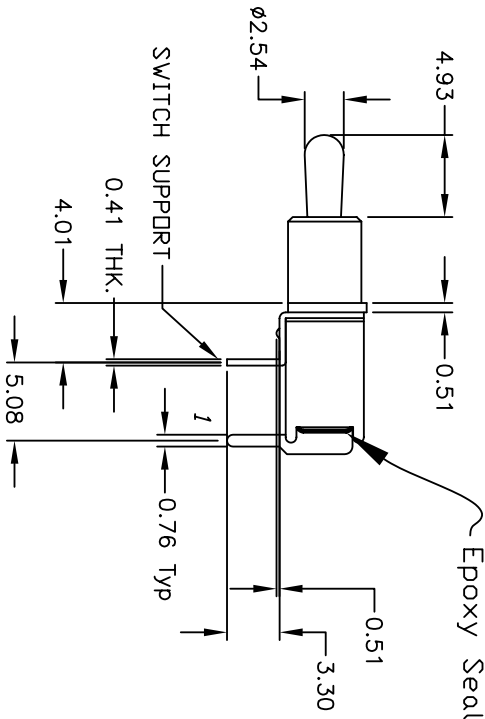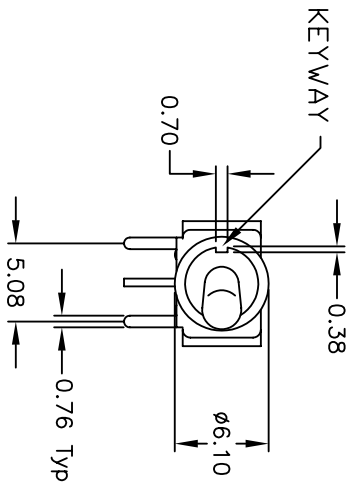

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 3A@ 120VAC. OR 28VDC:
1A@ 250VAC.
5. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/ Silver plate
6. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. 2002/95/EC (ROHS) COMPLIANT

REV.	ECN No.	DESCRIPTION	DATE	CHKD
D	17422	FIXED DIMENSIONS,FUNCTION	6/28/07	TN
C	17415	FIXED SWITCH FUNCTION	6/27/07	TN
B	11856	REVISED AND REDRAWN	11/28/01	CJB

TITLE				
200MSP2T2B4M6QE				
SCALE	DATE	DR	DWG	REV
2:1	6/28/07	TN	T212016	D



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED