

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)
[200MSP2T3B2M6RE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

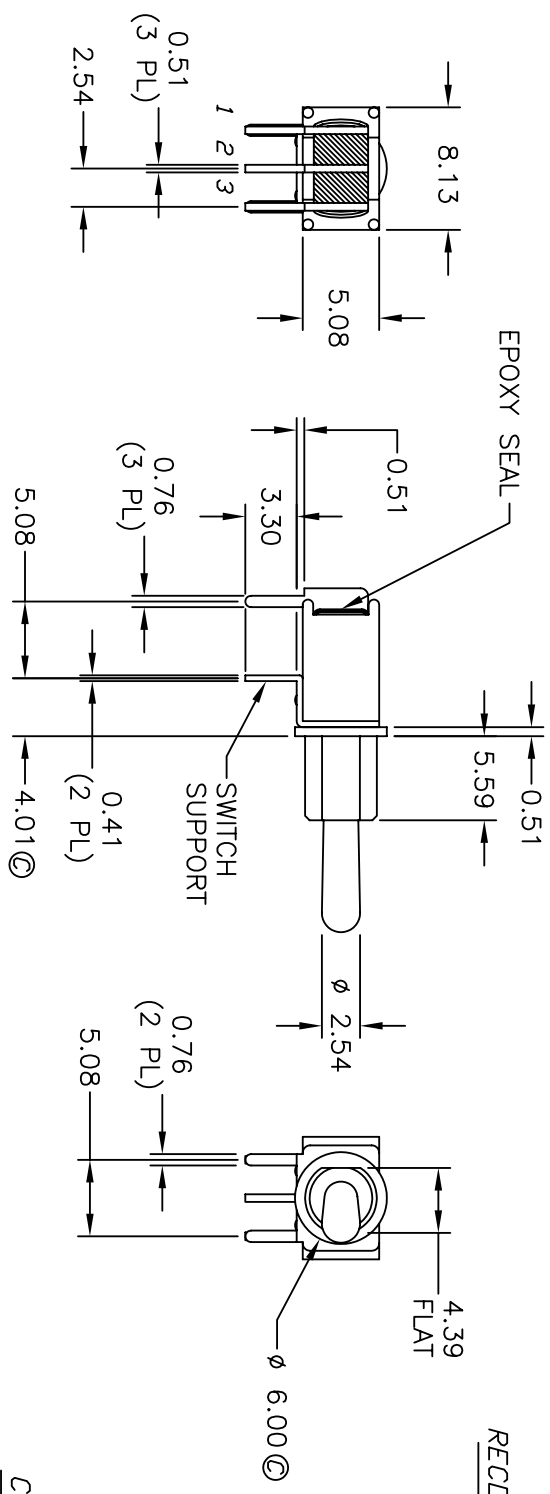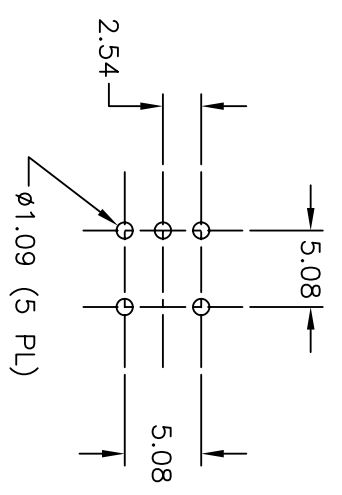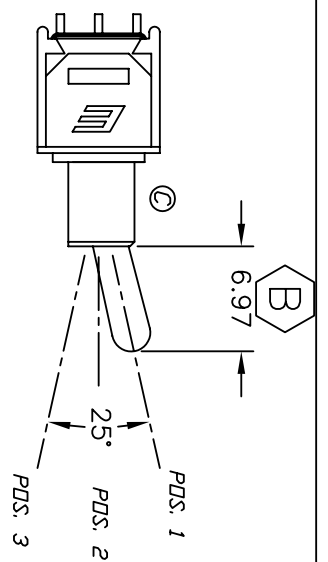

RECOMMENDED PCB LAYOUT



SPDT CIRCUIT

CONTACT CONFIGURATION

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	NONE	<DN>	
2-3	N/A	2-1	() = MOMENTARY

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 0.4 (VA) max. @20 VAC or DC max.
 5. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/ Au plate over Ni plate.
 6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
 7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
 8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
 9. OPERATING TEMP.: -30°C to 85°C

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	15214	CHANGES NOTED WITH	8/29/05	PH
B	15039	CHANGED ACTUATOR LENGTH	7/1/05	JB
A	10649	RELEASED FOR PRODUCTION	6/1/00	GLG

SCALE	DATE	DR	DWG	REV
2:1	5/25/00	GLG	T213006	C

E-SWITCH®

200 MSP2 T3 B2 M6 R E

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED