

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[3003P1J3BLKM6QE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET OF

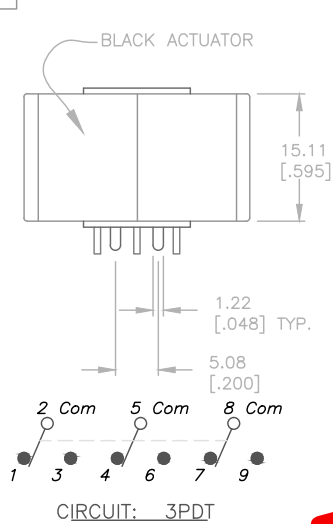


CIRCUIT: 3PDT


SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3,5-6,8-9	OPEN	2-1,5-4,8-7

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4;
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 5A @120VAC or 28VDC;
2A @250VAC
5. FIXED TERM/MOVING CONTACT:
COPPER ALLOY W/SILVER PLATE.
6. ELECTRICAL LIFE:
50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level
9. OPERATION TEMP.: -30°C to +85°C

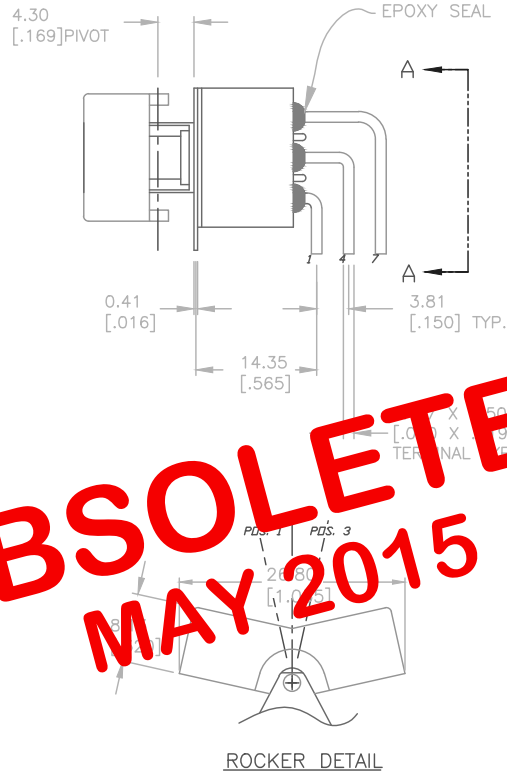

ROCKER DETAIL

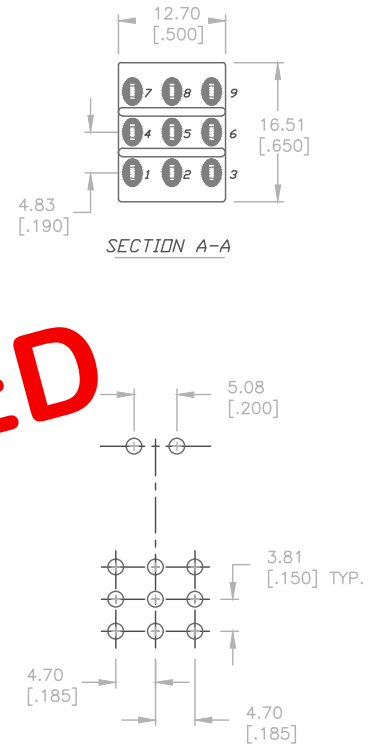

OBSOLETE
MAY 2015

A	12287	RELEASED FOR PRODUCTION	7/17/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

E-SWITCH®				
TITLE				
300 3P1 J3 BLK M6 QE				
SCALE	DATE	DR	DWG	REV
1.5:1	7/17/02	CJB	T331024	A