

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)
[300DP3J1BLKVS3RE](#)

For any questions, you can email us directly:




sales@integrated-circuit.com

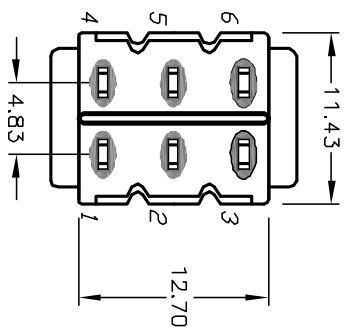

BOTTOM VIEW
BRACKET CROPPED
FOR CLARITY

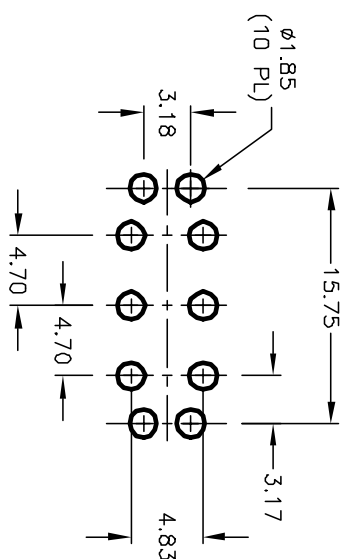

RECOMMENDED PANEL MOUNTING

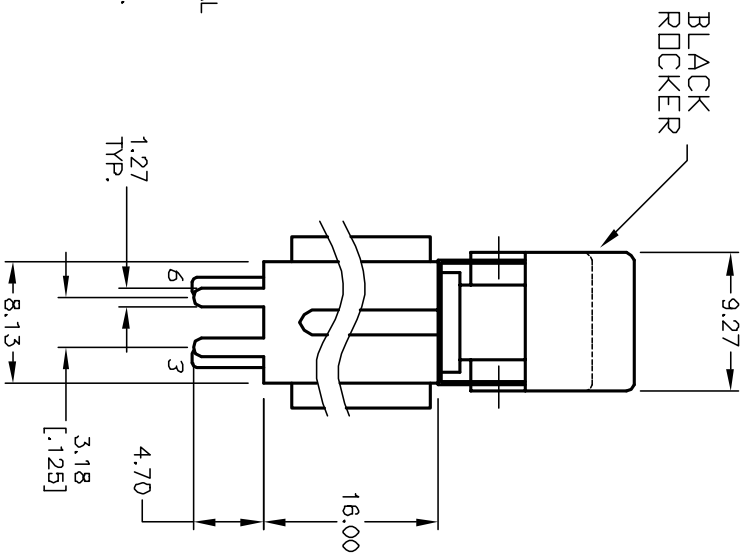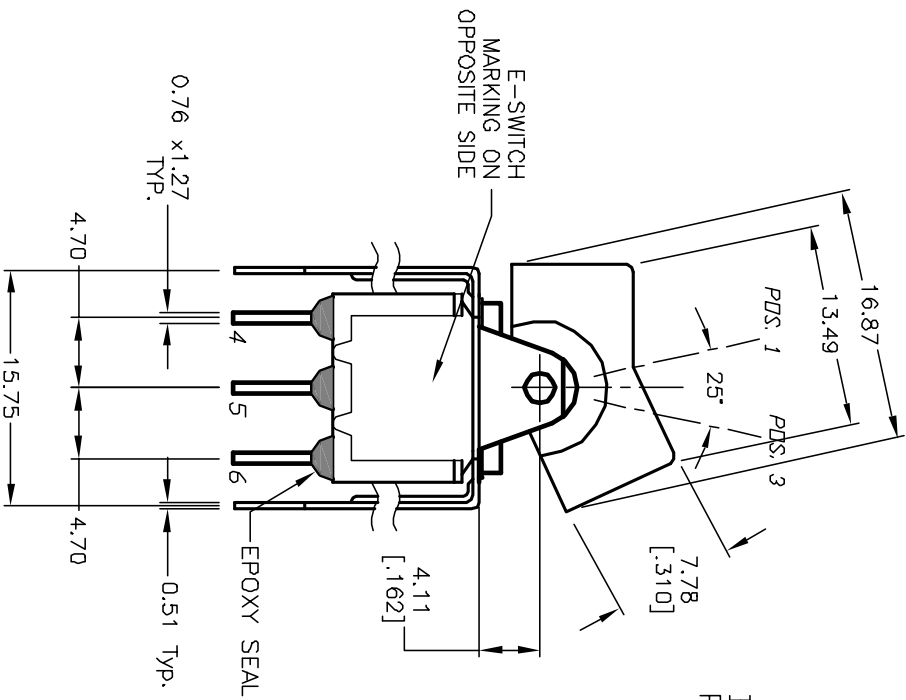

CIRCUIT: DPDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
		
DN	OFF	DN
2-3,5-6	OPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4V @20V AC or DC max.
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT

Nickle plate.

6. CONTACT RESISTANCE: 10mILLIOhms max initial @2-4VDC, 100ma for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

E-SWITCH®

				15.75			
A	12761	RELEASED	1/27/03	CB			
REV.	ECN No.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
E-SWITCH®							
TITLE 300 DP-3 J1 BLK VS3 R E (GOLD CONTACTS)							
SCALE 2:1		DATE 1/27/03		DR CB	DWG T323030		REV A