

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[300DP6J1BLKM7QE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


SHEET OF

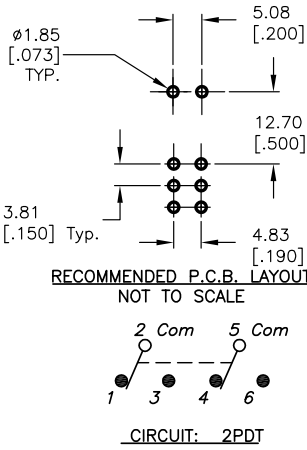

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	DN	DN
2-3, 5-6	2-3, 5-4	2-1, 5-4

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 5A @120VAC or 28VDC;
2A @250V.
- MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver plate
- CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
- ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
- INSULATION RESISTANCE: 1,000M ohm min.
- DIELECTRIC STRENGTH: 1000V RMS @sea level
- OPERATING TEMP.: -30°C to 85°C

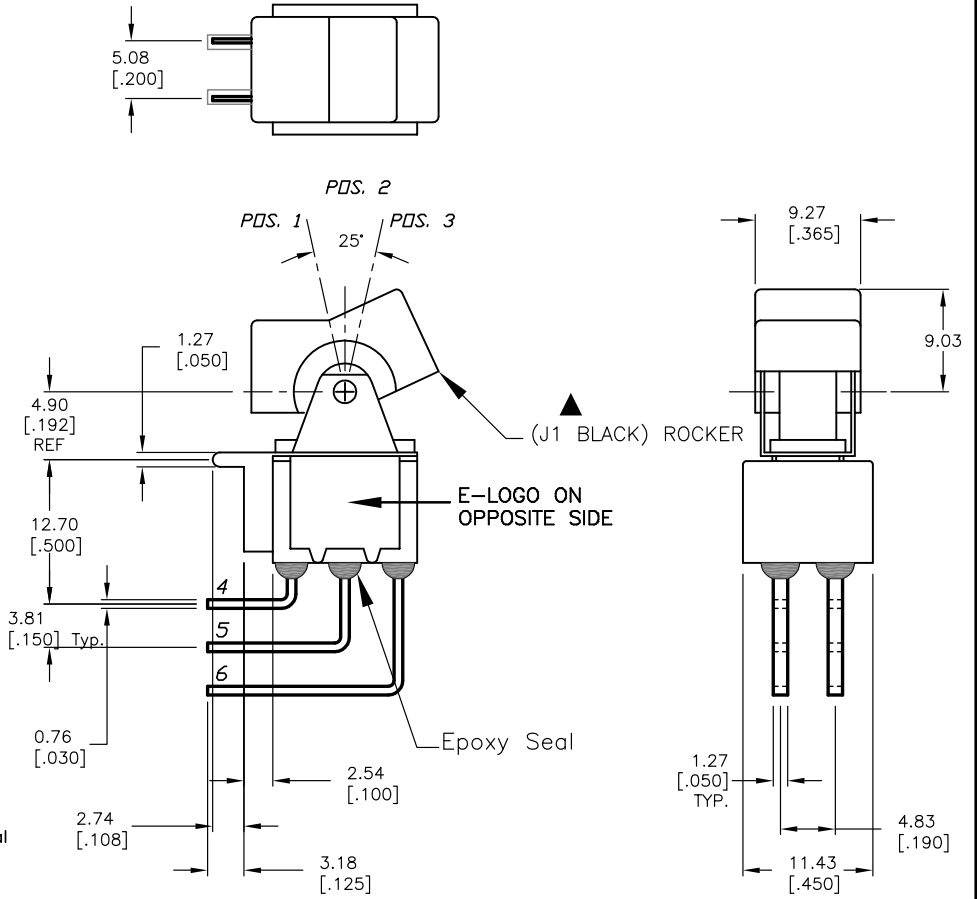

E-SWITCH®			
TITLE		300DP6J1BLKM7QE	
SCALE	DATE	DR	DWG
2:1	1/15/04	AR	T326003
REV.	ECN No.	DESCRIPTION	CHKD
A	13706	RELEASED FOR PRODUCTION	AR
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			