

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[400MDP1R1BLKM6QE](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

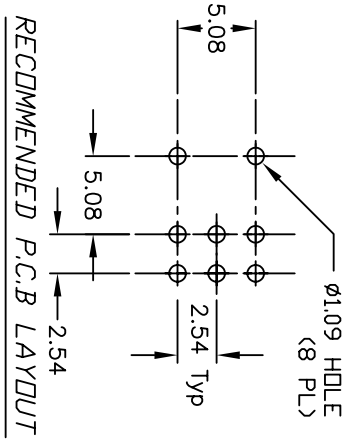

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	DN
2-3,5-6	OPEN	2-1,5-4

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. CONTACT RATING: 3A@ 120VAC. OR 28VDC: 1A@ 250VAC.
 5. FIXED TERMINAL & MOVING CONTACT: COPPER ALLOY w/ Silver plate
 6. ELECTRIC LIFE: 50,000 make-and-break cycles at full load.
 7. INSULATION RESISTANCE: 1,000 M ohm min.
 8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
 9. OPERATING TEMP.: -30°C to +85°C
 10. 2002/95/EC (ROHS) COMPLIANT

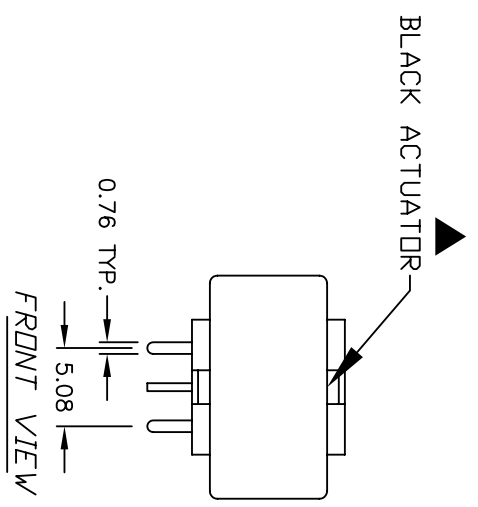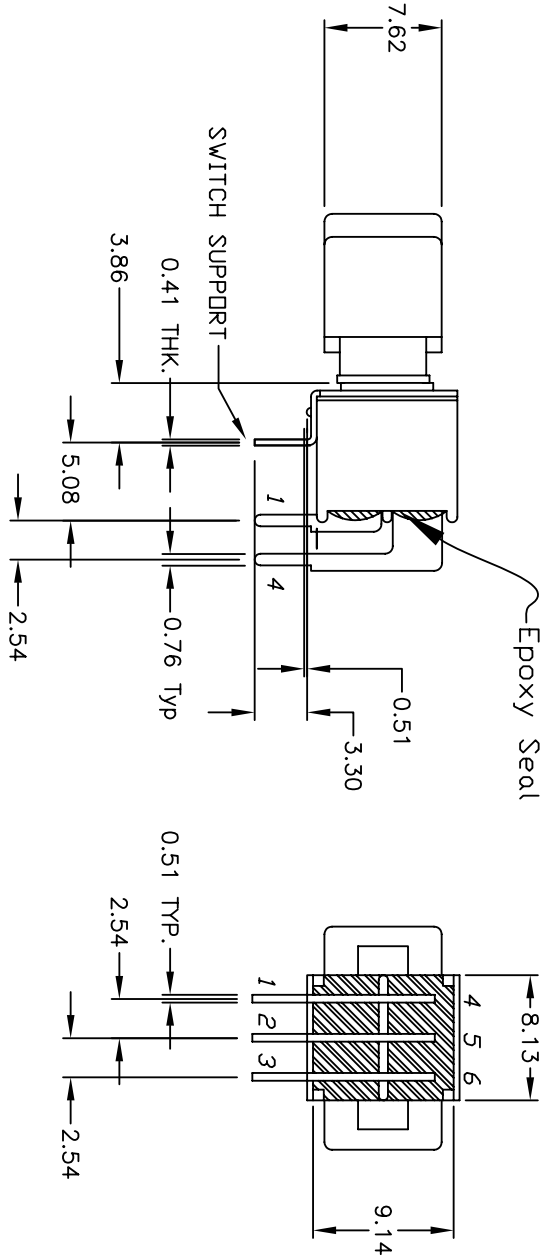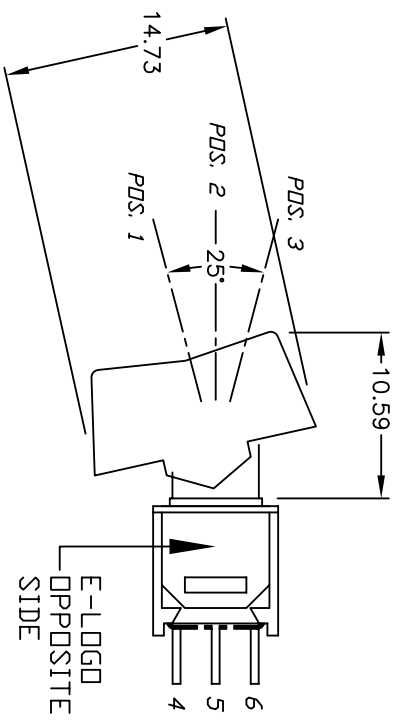

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	17449	REMOVED MARKING DN ACTUATOR	7/9/07	TN
B	12341	REVISED AND REDRAWN	8/2/02	CJB

TITLE	SCALE	DATE	DR	DWG	REV
400MDP1R1BLKM6QE	2:1	7/9/07	TN	T421003	C



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED