

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[400MSP1R6BLKM7RE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

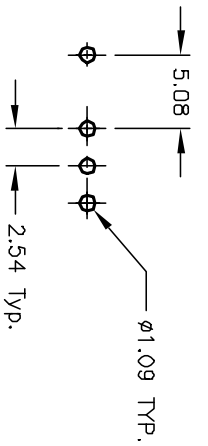


CIRCUIT: SPDT
 CONTACT CONFIGURATION

RECOMMENDED P.C.B. LAYOUT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	DN
2-3	DPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4(VA) max @20VDC
5. FIXED TERMINAL/MOVING CONTACT MATERIAL:
COPPER ALLOY w/Gold plating over Nickel plate.
6. ELECTRIC LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sec level.
9. OPERATING TEMP. -30°C to +85°C
10. ▲ DESIGNATE MAJOR FEATURE

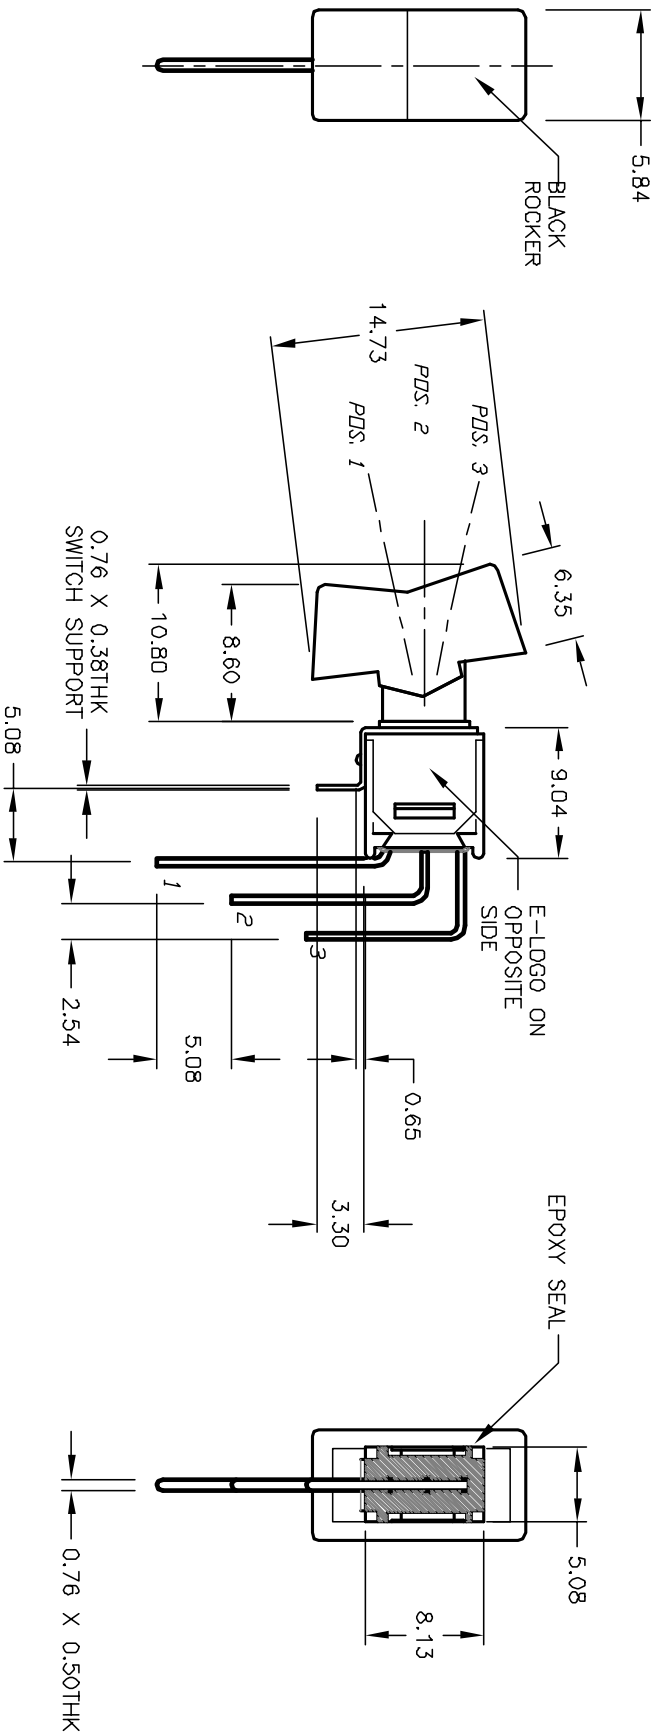

REV.	A	ECN NO.	12818	RELEASED	2/18/03	CJB	CHKD
DESCRIPTION				THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED			

TITLE	400 MSP-1 R6 (BLK) M7 RE (GOLD CONTACTS)			SCALE	2:1	DATE	2/18/03	DR	CJB	DWG	T411108	REV	A
-------	--	--	--	-------	-----	------	---------	----	-----	-----	---------	-----	---

E-SWITCH®