

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[800SP9B10M2QE](#)


For any questions, you can email us directly:

sales@integrated-circuit.com



SHEET 1 OF 1

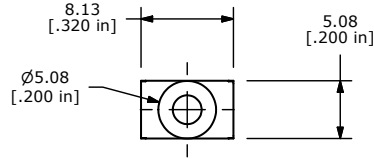

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1-3
(ON)=MOMENTARY	



- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 - ▲4. CONTACT MATERIAL: SILVER
 - ▲5. RATING: 1A @ 250 VAC
3A @ 120 VAC OR 28 VDC
 6. MECHANICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES
 7. CONTACT RESISTANCE: 20 mΩ MAX. INITIAL @ 2-4VDC
100mA FOR BOTH GOLD AND SILVER CONTACTS
 8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 9. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
 10. OPERATING TEMP.: -30°C to 85°C
 11. . DENOTES CRITICAL PARAMETER.
 12. ▲02/95/EC (ROHS) COMPLIANT

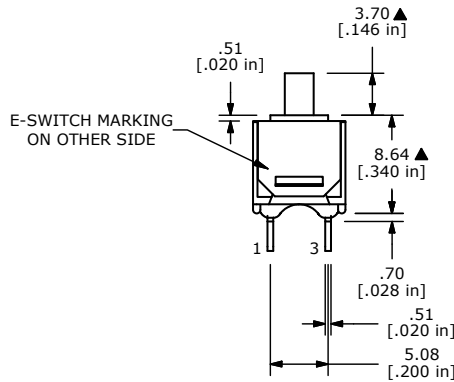

TITLE 800SP9B10M2QE

B	19984	UPDATE DRAWING	06/10/11	BMA
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1	DATE 6/10/2011	DR BMA	DWG T811012	REV B
-----------	----------------	--------	-------------	-------