

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[KC24A9.501NPS](#)


For any questions, you can email us directly:

sales@integrated-circuit.com


SHEET OF

NOTES:


1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
350mA, 110V AC/DC
5. CONTACT RATING (NON-SWITCHING) 5A
6. CONTACT MATERIAL: SILVER OVER COPPER ALLOY
7. OPERATING FORCE: 425 ± 100 CM/STANDARD
8. OPERATING TEMP: -30° to 85°C
9. CIRCUIT DP: 4 POSITIONS, 30° INDEX.
10. DIELECTRIC STRENGTH 1000V RMS min. @ SEA LEVEL
11. DESIGNATE MAJOR DIMENSIONS
12. HARDWARE SUPPLIED ON SWITCH - SEE BELOW
STOPRING, LOCKWASHER, & HEXNUT

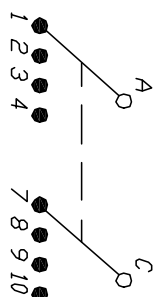


CONTACT CONFIGURATION
Timing (BBM) Non-Shorting

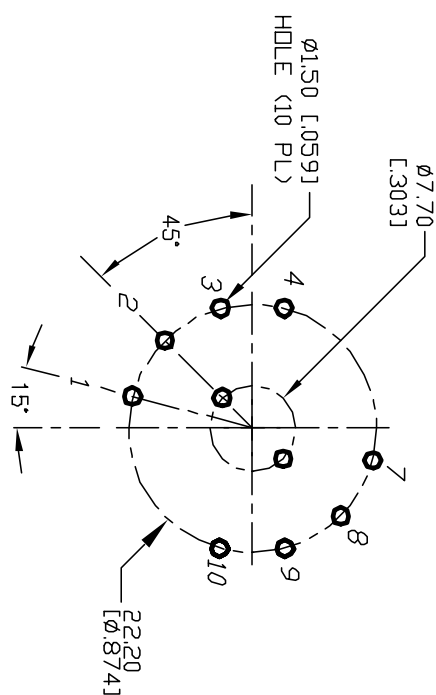

RECOMMENDED P.C.B. LAYOUT

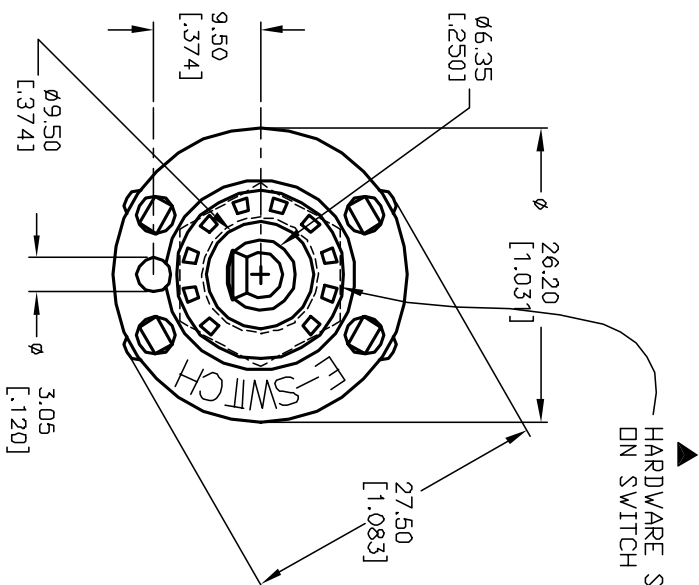

HARDWARE SUPPLIED
ON SWITCH

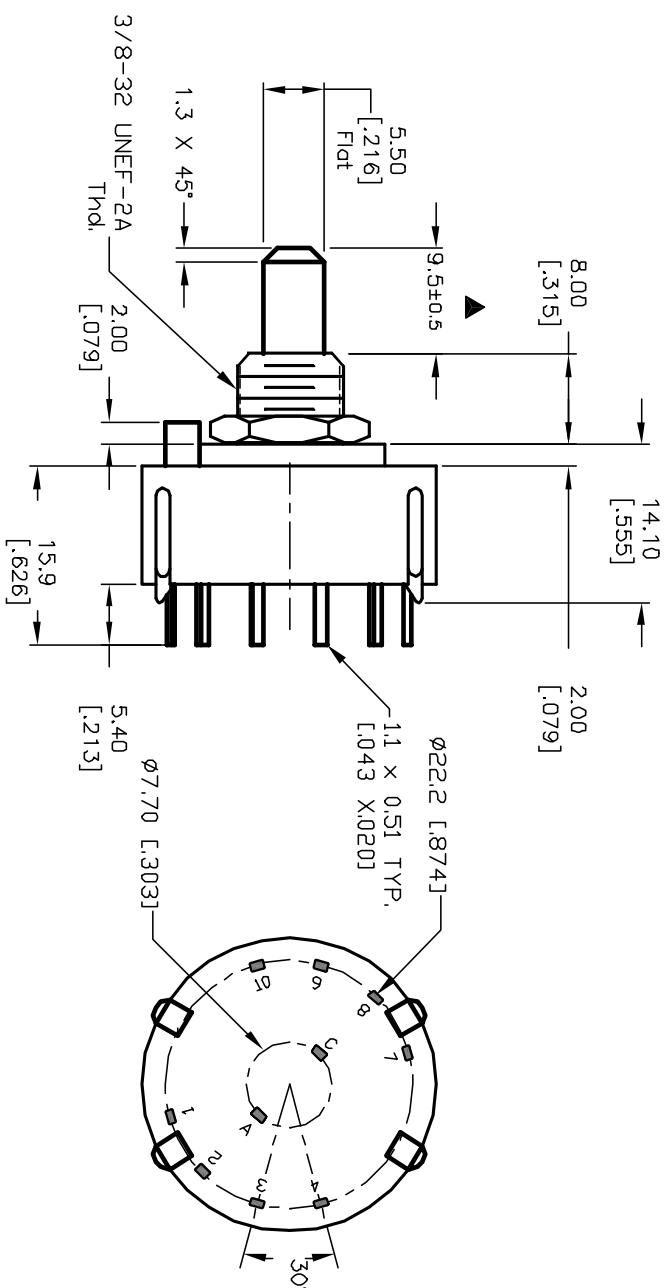

E-SWITCH®

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	12821	REVISE NOTE 12	3/4/03	CJB
B	12579	REV DESC. PER NEW CATALOG	11/19/02	CJB
A	11480	RELEASED FOR PRODUCTION	5/9/01	CJB

TITLE	SCALE	DATE	DR	DWG	REV
KC-24-A (9.5mm)-01-N-P-S	1.5:1	5/9/01	CJB	G510249	C

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSMITTED