

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[KC56A13.001NPF](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

SHEET 1 OF 1

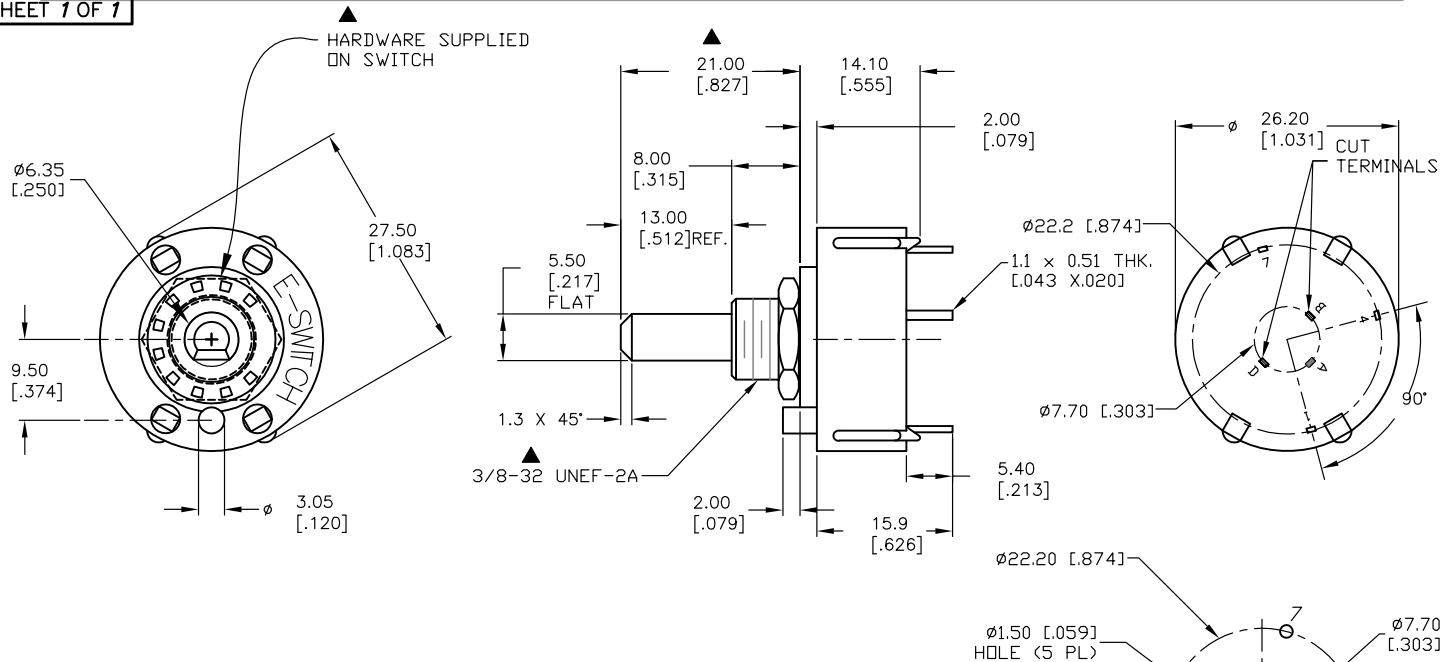

NOTES:

1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
350mA, 110V AC/DC
- ▲ 4. CONTACT RATING (NON-SWITCHING) 5A
5. CONTACT: GOLD FLASH over Silver plated.
6. OPERATING FORCE: 425±100 CM/STANDARD
7. OPERATING TEMP: -30° to 85°C
- ▲ 8. CIRCUIT SP: 3 POSITIONS, 90° INDEX.
9. DIELECTRIC STRENGTH 1000V RMS min. @ SEA LEVEL
10. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 11. HARDWARE SUPPLIED ON SWITCH- SEE BELOW
STOP RING, LOCKWASHER, & LOCKNUT

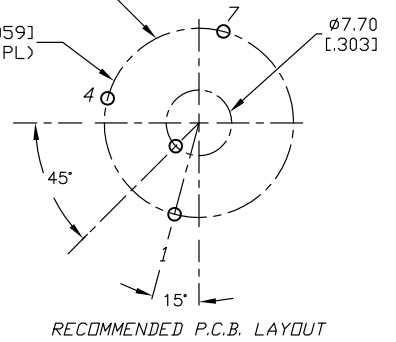

					E-SWITCH®				
A	13496	RELEASED FOR PRODUCTION	10/1/03	AR	TITLE KC56A13.001NPF				
REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
					1.5:1	10/1/03	AR	G511001	A
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									