

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[E-Switch](#)
[KC56A30.001NPF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

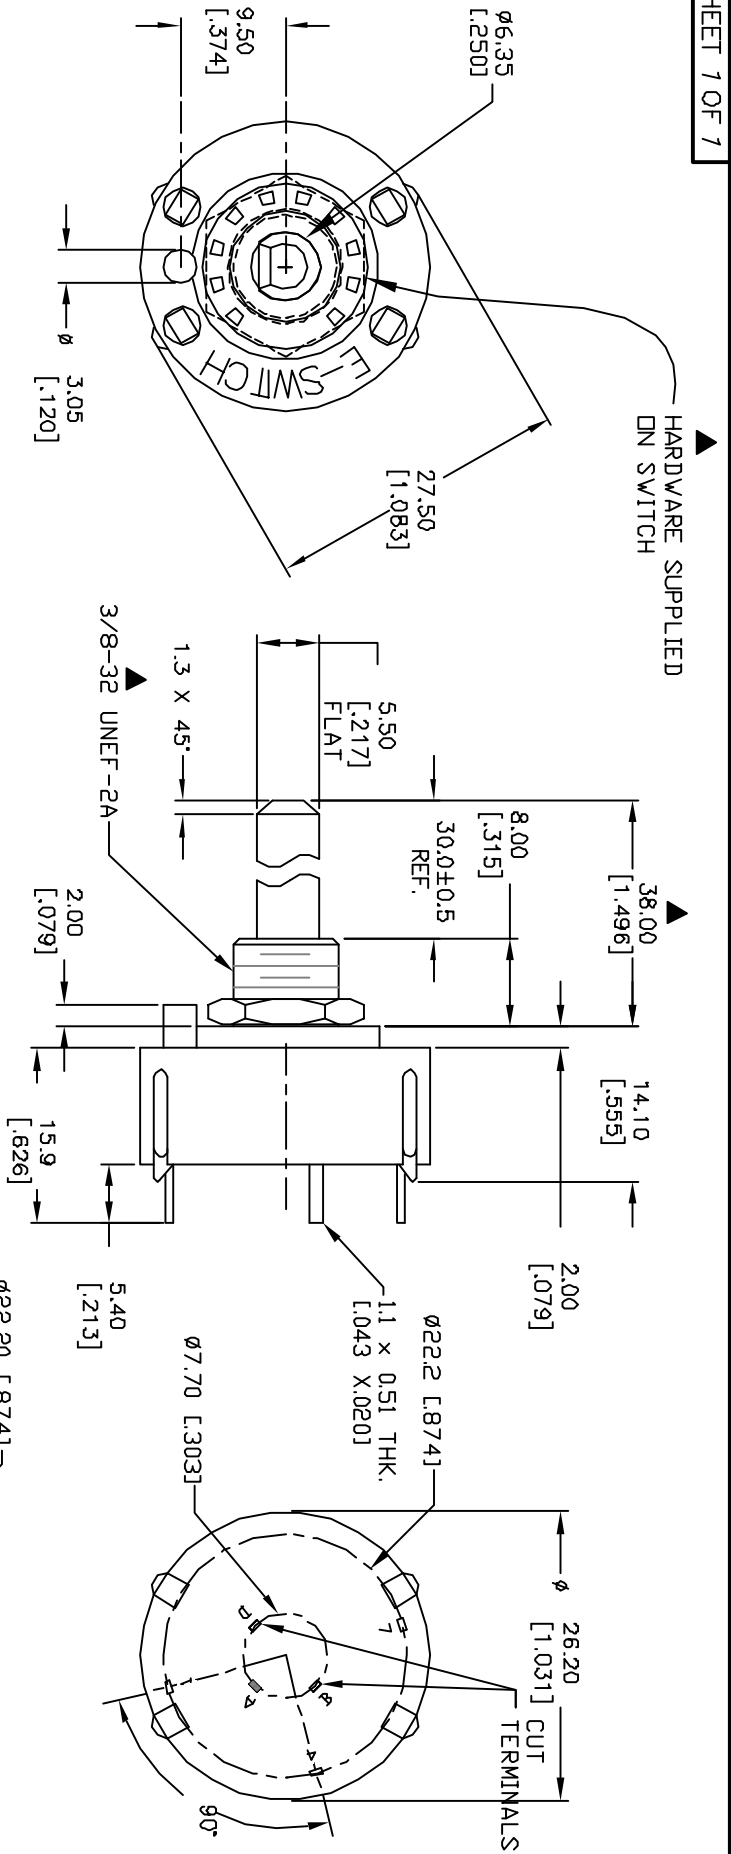

- NOTES:
1. ALL DIMENSION IN MM [INCH]
 2. GENERAL TOLERANCE: X.XX=±0.4 X.XXX=±0.25
 3. CONTACT RATING SWITCHING: 150mA, 250V AC/DC 350mA, 110V AC/DC
 4. CONTACT RATING (NON-SWITCHING) 5A
 5. CONTACT: GOLD FLASH over Silver plated.
 6. OPERATING FORCE: 425±100 CM/STANDARD
 7. OPERATING TEMP: -30° to 85°C
 8. CIRCUIT SP: 3 POSITIONS, 90° INDEX.
 9. DIELECTRIC STRENGTH 1000V RMS min. @ SEA LEVEL
 10. ▲ DENOTES CRITICAL PARAMETER.
 11. HARDWARE SUPPLIED ON SWITCH- SEE BELOW STOP RING, LOCKWASHER, & LOCKNUT

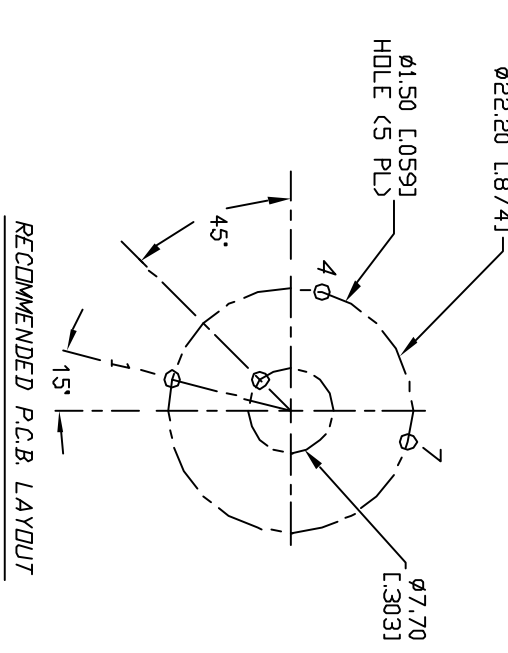

A	13254	RELEASED FOR PRODUCTION	6/27/03	AR
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

TITLE		SCALE		DATE	DR	DWG	REV
KC56A30.001NPF		1.5:1		6/27/03	AR	G510993	A

E-SWITCH®

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED