

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[KC57A10.001NLS](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET 1 OF 1

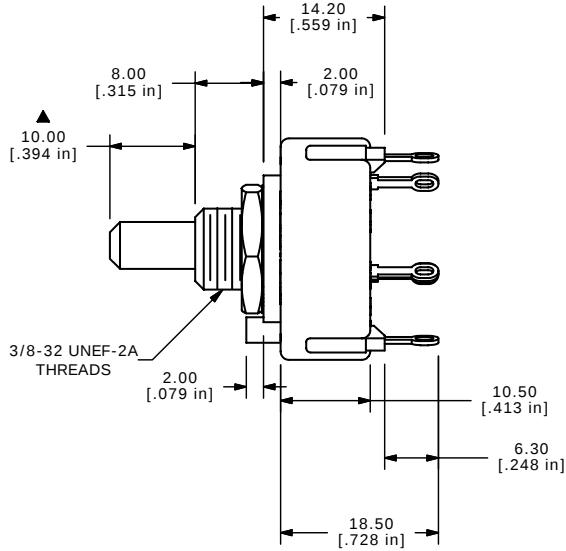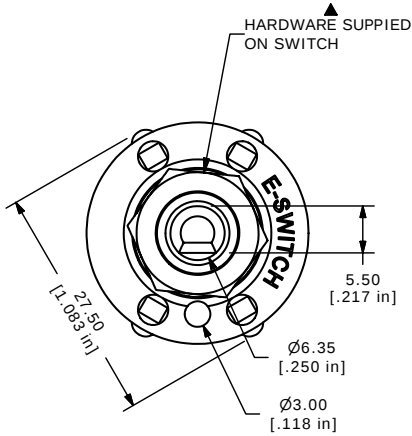

- NOTE:
1. ALL DIMENSIONS IN MM[INCH].
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. CONTACT MATERIAL: SILVER
 5. CONTACT RATING: 300mA @ 125 VAC
 6. CONTACT RATING (NON-SWITCHING) 5A
 7. OPERATING FORCE: 800 ± 300 gm-cm
 8. OPERATING TEMP: -30°C TO 85°C
 9. CIRCUIT SP: 4 POSITION 60° INDEX.
 10. DIELECTRIC STRENGTH: 500VAC FOR 1 MIN.
 11. HARDWARE SUPPLIED ON SWITCH:
LOCKWASHER, HEXNUT, STOP RING
 12. ▲ DENOTES CRITICAL PARAMETER.
 13. 2002/95/EC (ROHS) COMPLIANT

E-SWITCH®

TITLE KC57A10.001NLS

A	16670	RELEASED FOR PRODUCTION	11/17/2006	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	1.5:1	DATE	11/17/2006	DR	TN	DWG	G511009	REV	A
-------	-------	------	------------	----	----	-----	---------	-----	---