

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[KO130J604](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

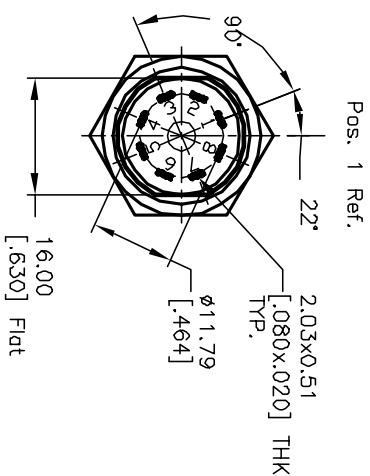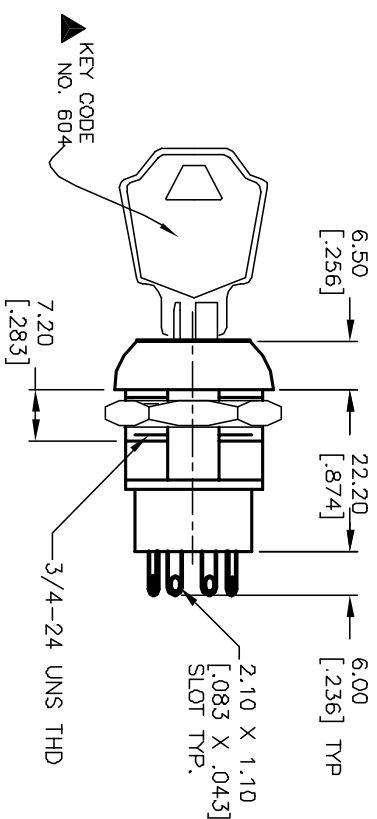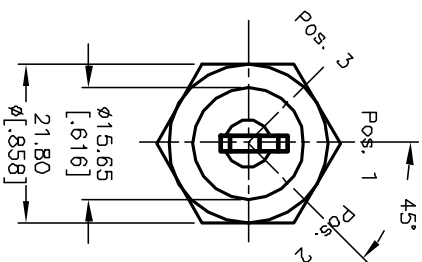

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 4A @125VAC/28VDC, 2A @250VAC
5. DIELECTRIC STRENGTH: 1kV RMS min. at sea level
6. ELECTRICAL LIFE: 10,000 make-and-break cycles
at full load.
7. MATERIALS:

CONTACTS: Silver Plated Cu (Q Contact material)
TERMINALS: GOLD Plated Cu (Q Contact material)
MOUNTING NUT: Nickel Plated zinc alloy
CONTACT SPRING: Piano Wire
KEYS (2): Brass with code no. A604
LOCK: Bright NI plated zinc alloy with NI facing
TUMBLER Mechanism: 4-disc tumbler cylinder.




RECOMMENDED PANEL LAYOUT

SWITCH FUNCTION		
CONNECTED TERMINAL #		
POS. 1	POS. 2	POS. 3
8-1, 4-5	1-2, 5-6	7-8, 3-4

LEGEND

- ◆ = Detent Positions (45° or 90°)
- ⊙ = Key pull possible in these positions



CIRCUIT: DP (45° INDEXING)
CONTACT CONFIGURATION

A	11722	RELEASED FOR PRODUCTION	10/11/01
REV.	ECN NO.	DESCRIPTION	DATE
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
			CHKD
			CJB

E-SWITCH®				
TITLE				
K0130J-604				
SCALE	DATE	DR	DWG	REV
1:1	10/11/01	CJB	K200264	A