

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)


[LAKEEV11JREDRED](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET 1 OF 1

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F060619	LAKEEV11
2	1	F051601	P16 PLASTIC TERM. PROTECTOR
3	1	F050420	12VDC RED LED
4	1	F051702	25MM RING
5	1	F060204	25MM RED LENS

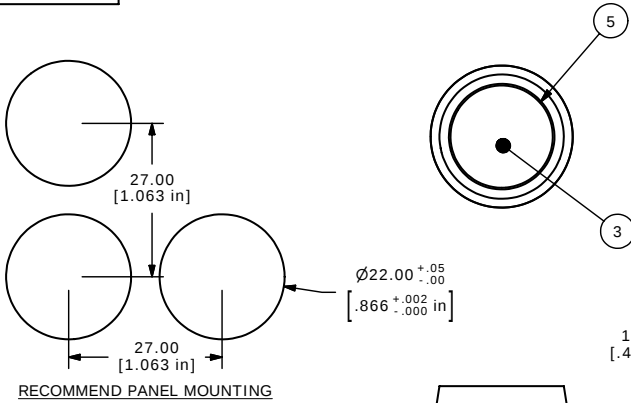




RECOMMEND PANEL MOUNTING



SPST
CONTACT CONFIGURATION

NOTES:

- ALL DIMENSIONS IN MM [INCH].
- GENERAL TOLERANCE: 0.0 ± 0.4
 0.00 ± 0.25
- TERM. NOS. FOR REF. ONLY.
- RATING: 5A @250VAC
8A @125VAC
.2A @250VDC
6A @24VDC
- ELECTRIC LIFE: 50,000 MAKE-OR-BREAK CYCLES AT FULL LOAD.
- INSULATION: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 2000V FOR 1 MIN
- OPERATING TEMP: -25°C TO 55°C
- LENS COLOR: RED
- LAMP VOLTAGE: 12VDC LED

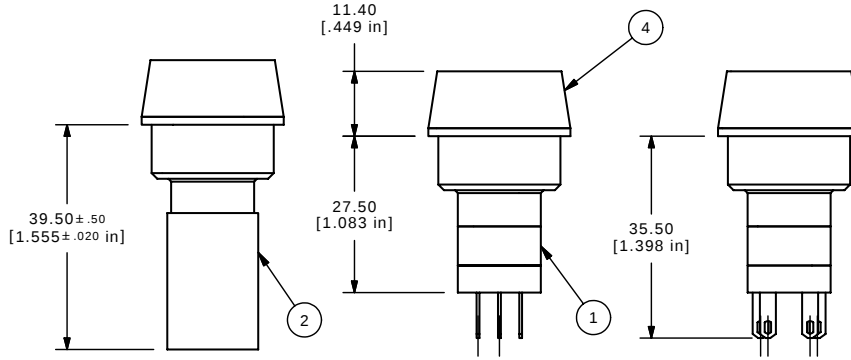

ISOMETRIC

E-SWITCH®

TITLE LAKEEV11JREDRED

A	15695	RELEASED FOR PRODUCTION	1/19/06	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 1:1

DATE 1/19/2006

DR PH

DWG XF0666P

REV A