

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)
[LAKOAV11CGRN](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

SHEET 1 OF 1


Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F060621	LAKOAV11
2	1	F051601	P16 PLASTIC TERM. PROTECTOR
3	1	F050405	28V AC/DC INCANDESCENT
4	1	F051702	25MM RING
5	1	F061254	25MM GRN LENS

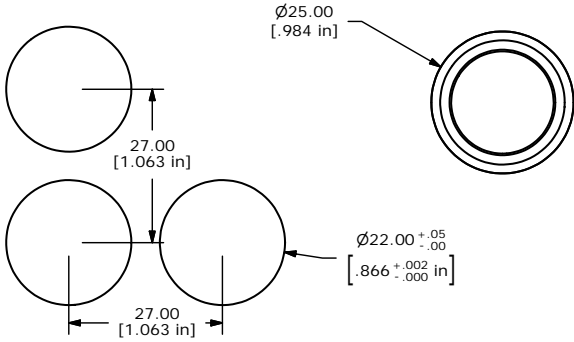

RECOMMEND PANEL MOUNTING




CONTACT CONFIGURATION




11.00 [0.433 in]

27.50 [1.083 in]

35.50 [1.398 in]



ISOMETRIC



- NOTES:
- ALL DIMENSIONS IN MM [INCH].
 - GENERAL TOLERANCE: 0.0±0.4
0.00±0.25
 - TERM. NOS. FOR REF. ONLY.
 - RATING: 5A @250VAC
8A @125VAC
.2A @250VDC
6A @24VDC
 - ELECTRIC LIFE: 50,000 MAKE-OR-BREAK CYCLES AT FULL LOAD.
 - INSULATION: 1,000 MΩ MIN.
 - DIELECTRIC STRENGTH: 2000V FOR 1 MIN
 - OPERATING TEMP: -25°C TO 55°C
 - LENS COLOR: GREEN
 - LAMP VOLTAGE: 28V AC/DC

E-SWITCH®

TITLE LAKOAV11CGRN

A	16540	RELEASED FOR PRODUCTION	10/18/2006	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
1:1	10/18/2006	TN	XF0691P	A