

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)

[LASOAV11JGRNGRN](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET OF

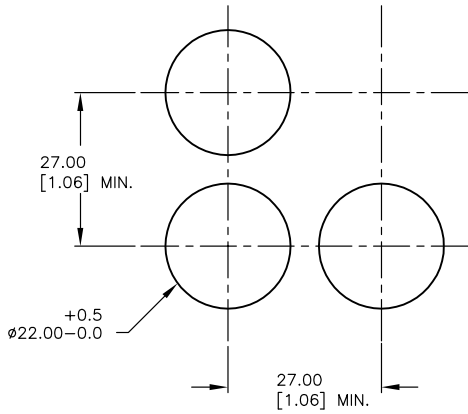


RECOMMENDED PANEL MOUNTING

1 o 2
3 o 4
a-(L)-b (+)

SPST
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATINGS: 5A@250V AC,
8A@125V AC
4. CONTACT MATERIAL: COPPER ALLOY W/Gold Plating
5. TRAVEL: 3.0mm (Total) 2.0mm (Latch)
6. MECHANICAL LIFE: >100,000 Cycles
7. ELECTRICAL LIFE: >50,000 Cycles
8. INSULATION RESISTANCE: >1000 MILLI-OHMS
9. OPERATING TEMP: -20°C to 55°C
- ▲ 10. LAMP VOLTAGE: 12VDC (L.E.D.)
11. ▲ DENOTES CRITICAL PARAMETER.

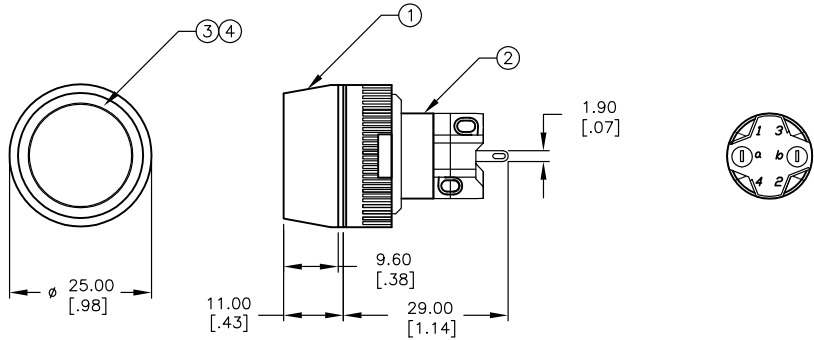

E-SWITCH®

TITLE

LASOAV11JGRNGRN

A	14035	RELEASED FOR PRODUCTION	5/20/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

SCALE	1:1	DATE	5/20/04	DR	AR	DWG	XF0588P	REV	A
-------	-----	------	---------	----	----	-----	---------	-----	---