

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[PBH2UOANAGV](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET 1 OF 1




P.C. MOUNTING






CIRCUIT: 2PDT

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATING 0.1A @30V DC
 - ▲ 5. MATERIALS:
CONTACT/TERMINALS: SILVER PLATE
HOUSING: PBT UL94VO
BASE: PA66 UL94VO
ACTUATOR: PA66 UL94VO
CAP: ABS UL94VO
 6. CONTACT RESISTANCE: 100 MILLI-OHM (INITIAL)
 - ▲ 7. TIMING: NON-SHORTING
 8. OPERATING FORCE: 230±50GF
 9. TRAVEL: MOMENTARY
2MM TO MAKE
3MM OVERALL
 10. ELECTRICAL LIFE: 10000 CYCLES
 11. OPERATING TEMP: -20°C TO +70°C
 12. ▲ DENOTES CRITICAL PARAMETER.
 13. 2002/95/EC (ROHS) COMPLIANT

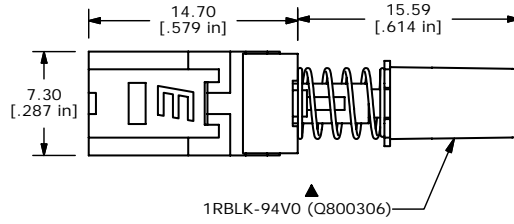

1RBLK-94V0 (Q800306)

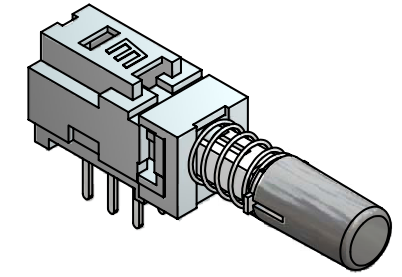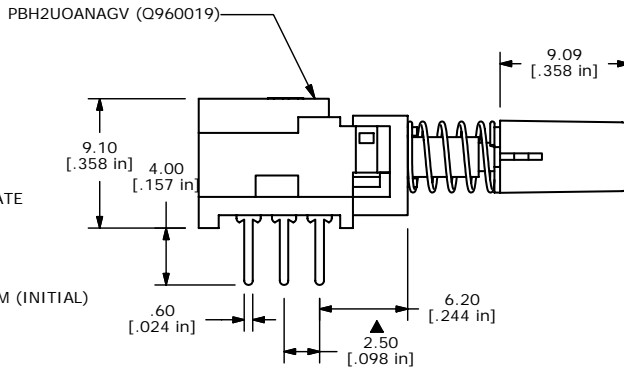

TITLE PBH2UOANAGV1RBLK-94V0

A	16400	RELEASED FOR PRODUCTION	8/31/06	BO
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
2.5:1	8/31/2006	BO	XQ0022P	A