

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[PBH4UEEKZXNAGV](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET 1 OF 1





P.C. MOUNTING





CIRCUIT: 4PDT

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
 3. TERM. NOS. FOR REFERENCE ONLY.
 - ▲ 4. RATING 0.1A @30V DC
 5. MATERIALS:
CONTACT/TERMINALS: SILVER PLATE
HOUSING: PBT UL94VO
BASE: PA66 UL94VO
ACTUATOR: PA66 UL94VO
CAP: ABS UL94VO
 6. CONTACT RESISTANCE: 100 mΩ (INITIAL)
 - ▲ 7. TIMING: NON-SHORTING
 8. OPERATING FORCE: 280±50GF
 9. TRAVEL: LATCHING
2MM TO LOCK
3MM OVERALL
 10. ELECTRICAL LIFE: 10000 CYCLES
 11. OPERATING TEMP: -20°C TO +70°C
 12. ▲ DENOTES CRITICAL PARAMETER.
 13. 2002/95/EC (ROHS) COMPLIANT

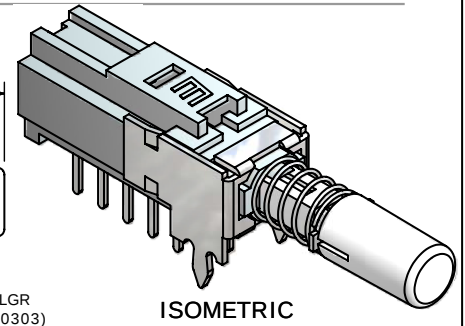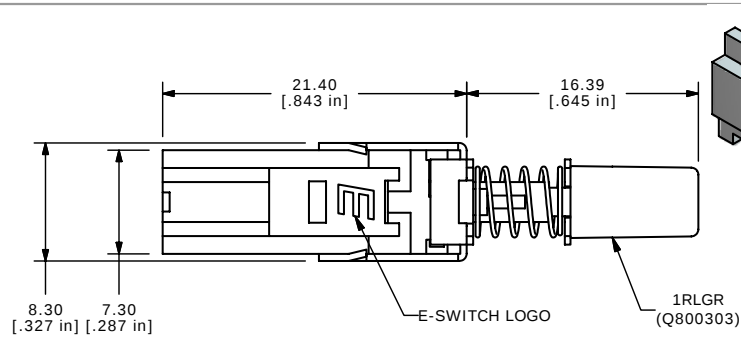

ISOMETRIC

PBH4UEEKZXNAGV
(Q960020)

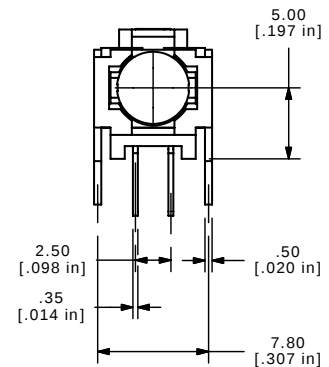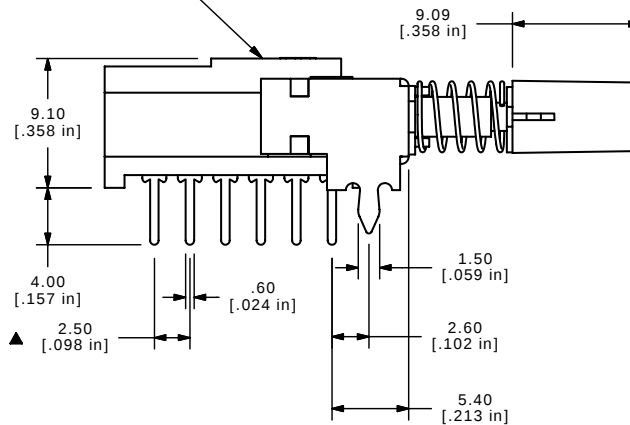

E-SWITCH®

TITLE PBH4UEEKZXNAGV1RLGR

A	16489	RELEASED FOR PRODUCTION	9/26/2006	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	2.5:1	DATE	9/26/2006	DR	TN	DWG	XQ0024P	REV	A
-------	-------	------	-----------	----	----	-----	---------	-----	---