

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[E-Switch](#)
[R1966FBLKBLKEP](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

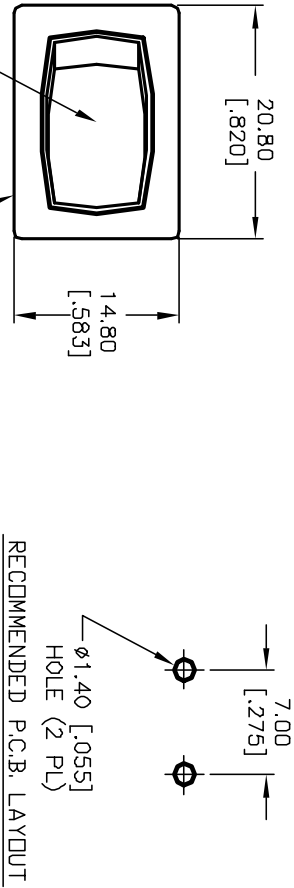

PANEL THICKNESS	X dimension
0.75-1.25 [0.30-0.49]	19.2-0.1 [7.56]
1.25-2.0 [0.49-0.79]	19.4-0.1 [7.64]
2.0-3.0 [0.79-1.18]	19.8-0.1 [7.80]

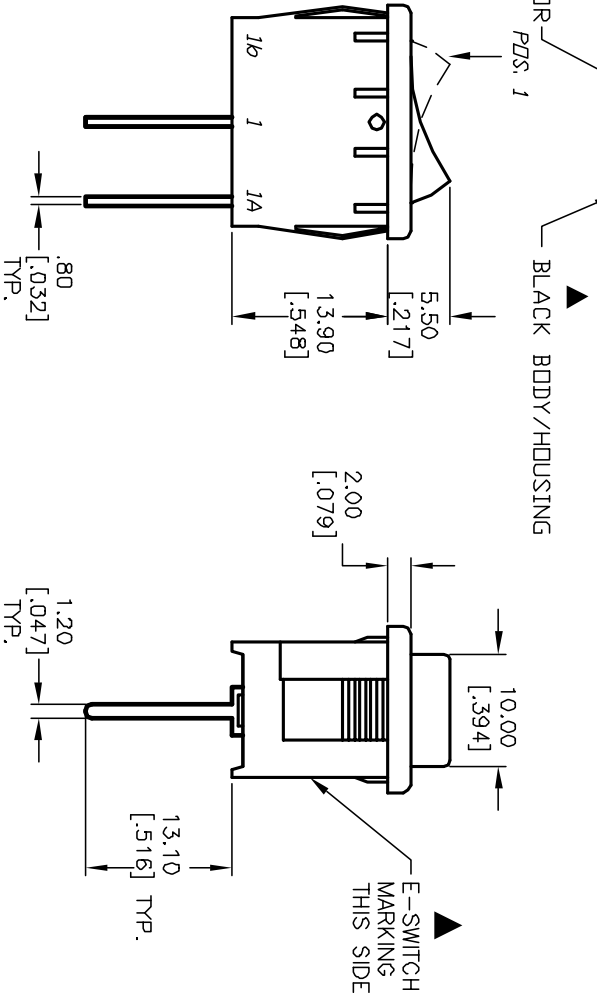

SWITCH FUNCTION	POS. 1	POS. 2
<DN>	DNF	
1-1a	OPEN	

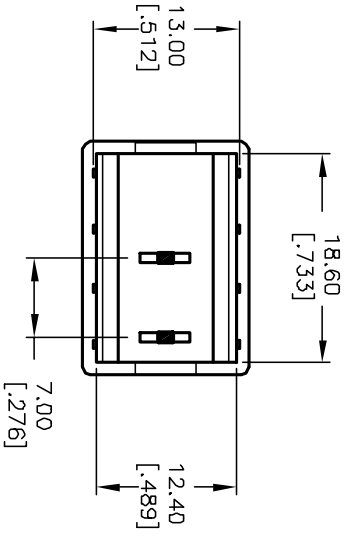

E-SWITCH®

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X:XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. RATING: 15A @ 125VAC OR 6A @ 250VAC
 5. MATERIALS: TERMINALS: Silver Plated Copper Alloy CONTACTS: Coin Silver, Silver Plated
 6. ELECTRICAL LIFE: 10,000 cycles
 7. CONTACT RESISTANCE: <20 Mega Ω
 8. INSULATION RESISTANCE: >1000 Mega Ω
 9. DIELECTRIC STRENGTH: >1500 V 1 minute >3000 V between poles

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12252	RELEASED FOR PRODUCTION	7/11/02	CJB

TITLE	SCALE	DATE	DR	DWG	REV
R1966F BLK BLK EP	1.5:1	7/11/02	CB	M304212	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED