

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[E-Switch](#)
[R1973ABLKWHTIR0](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




PANEL THICKNESS	X dimension
0.75-1.25 [0.030-.049]	19.3- <i>oi</i> [7.60]
1.25-2.0 [0.049-.079]	19.4- <i>oi</i> [7.64]
2.0-3.0 [0.079-.118]	19.6- <i>oi</i> [7.72]

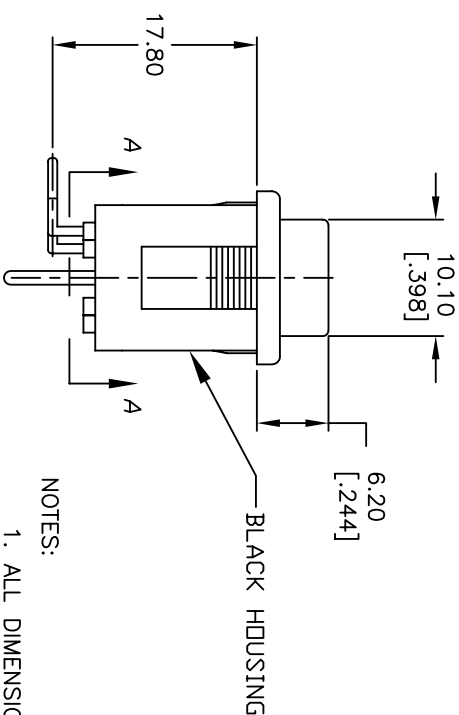

CIRCUIT: SPST 

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. RATING: 6A @250VAC, 9A @125VAC (UL, CSA, VDE)
4. MATERIAL:
CONTACT SURFACE: Coin Silver, Silver Plate
TERMINAL: Copper Alloy W/ Silver Plate.
5. CONTACT RESISTANCE: 20milliohms TYP. INITIAL
6. INSULATION RESISTANCE: 1000Megohms
7. DIELECTRIC STRENGTH:
>1500V RMS min. @SEA LEVEL
8. MECHANICAL LIFE: 30,000 CYCLES.
9. ELECTRICAL LIFE: 10,000 CYCLES.

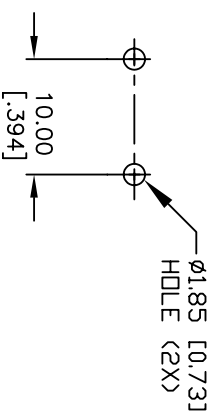

RECOMMENDED P.C.B. HOLES

E-SWITCH®

					TITLE	<i>R1973ABLKWHTRD</i>					
A	15130	NEW RELEASE	8/12/05	PV	SCALE	DATE	DR	DWG	REV		
REV.	ECN No.	DESCRIPTION	DATE	CHKD	1.5:1	8/12/05	PV	M400017	A		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED											